
[METRIC]
MIL-C-83527/6A
28 December 1988
SUPERSEDING
DOD-C-83527/6
15 May 1985

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 4

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83527.

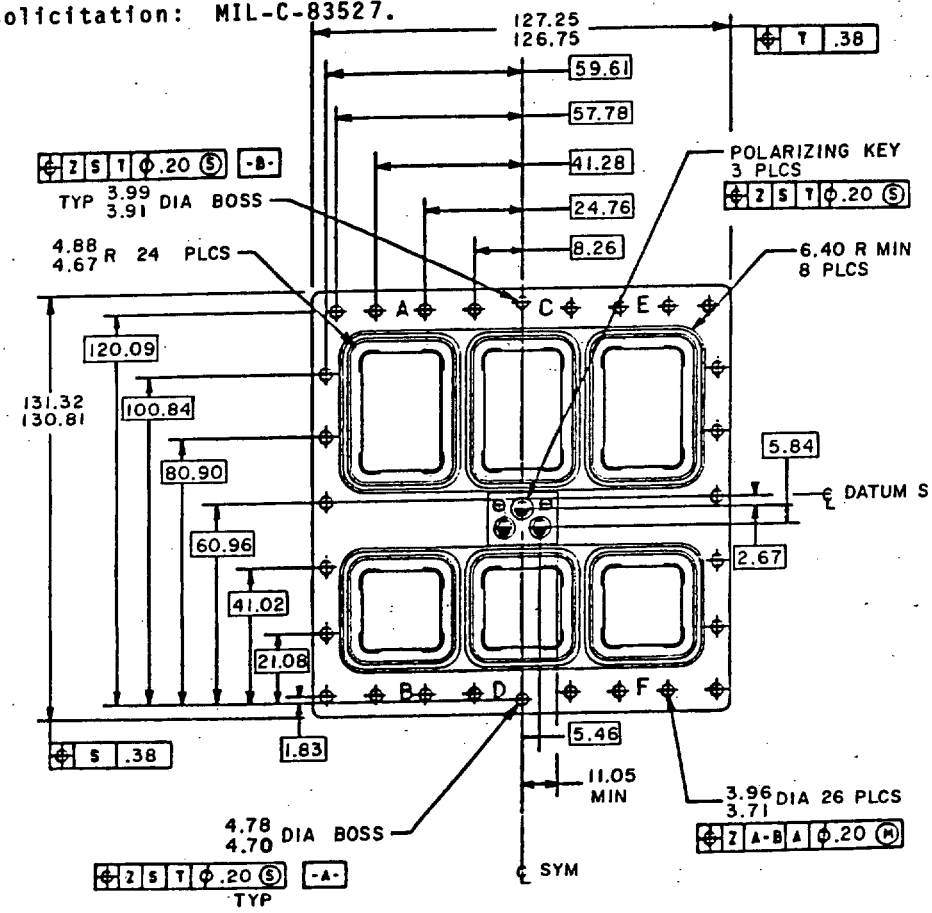

FRONT VIEW

FIGURE 1. Connector, receptacle.

A denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.


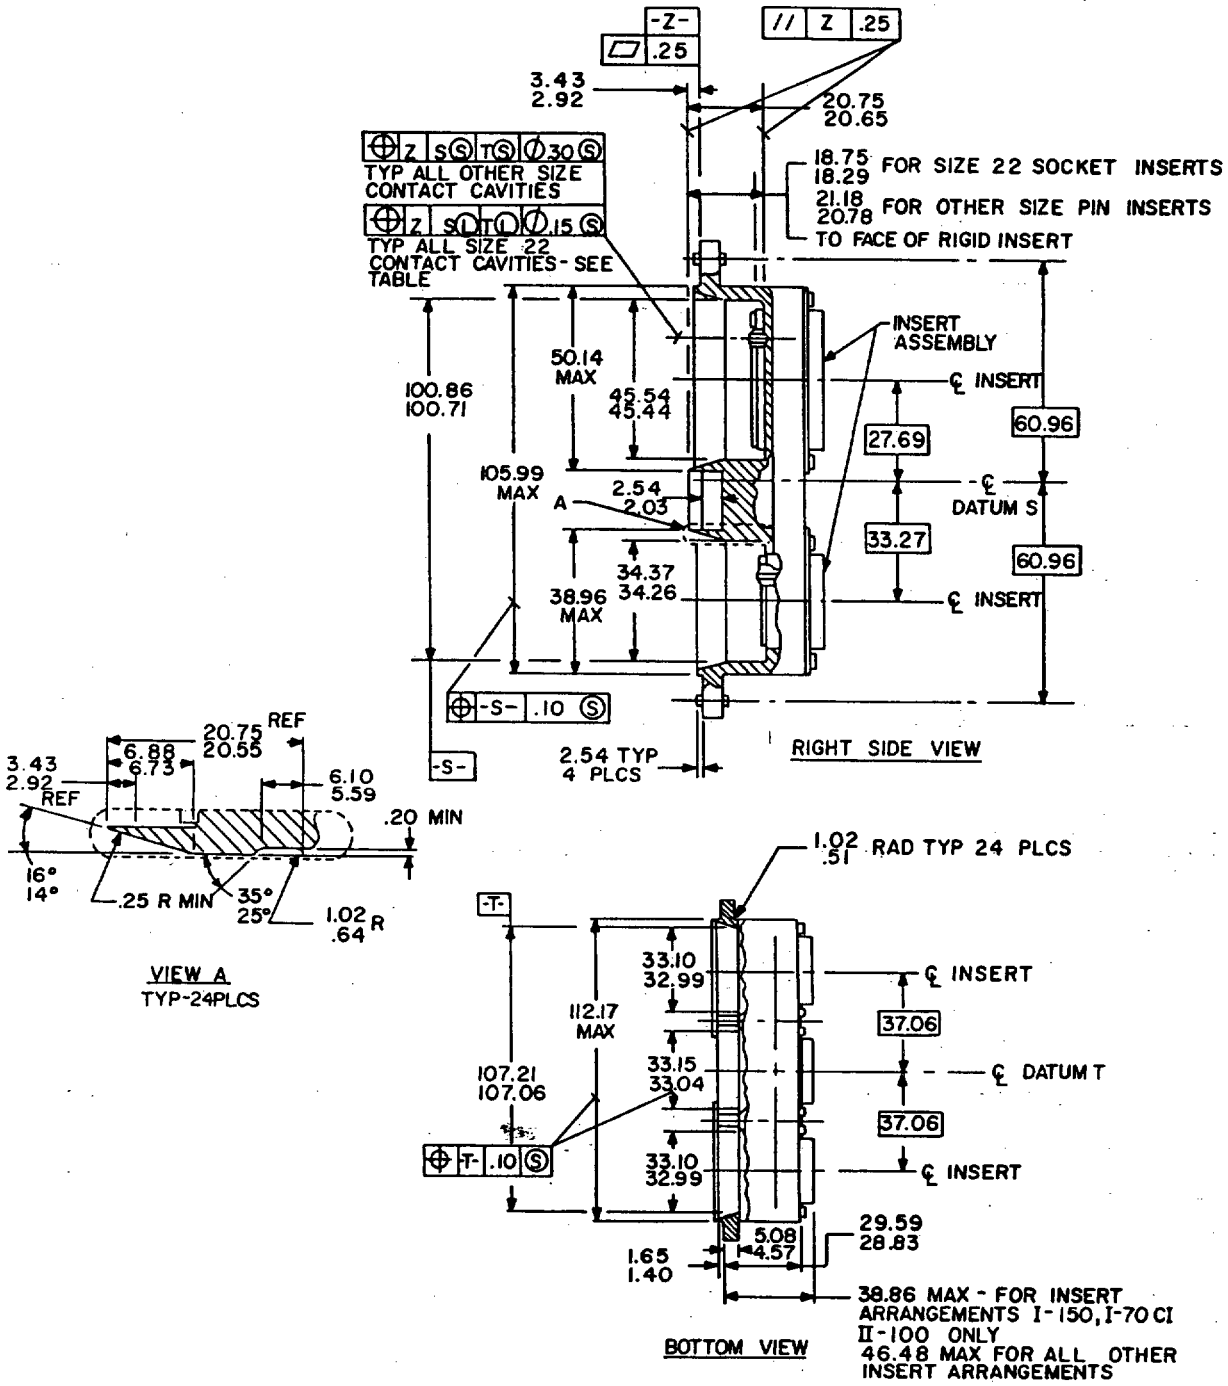


FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

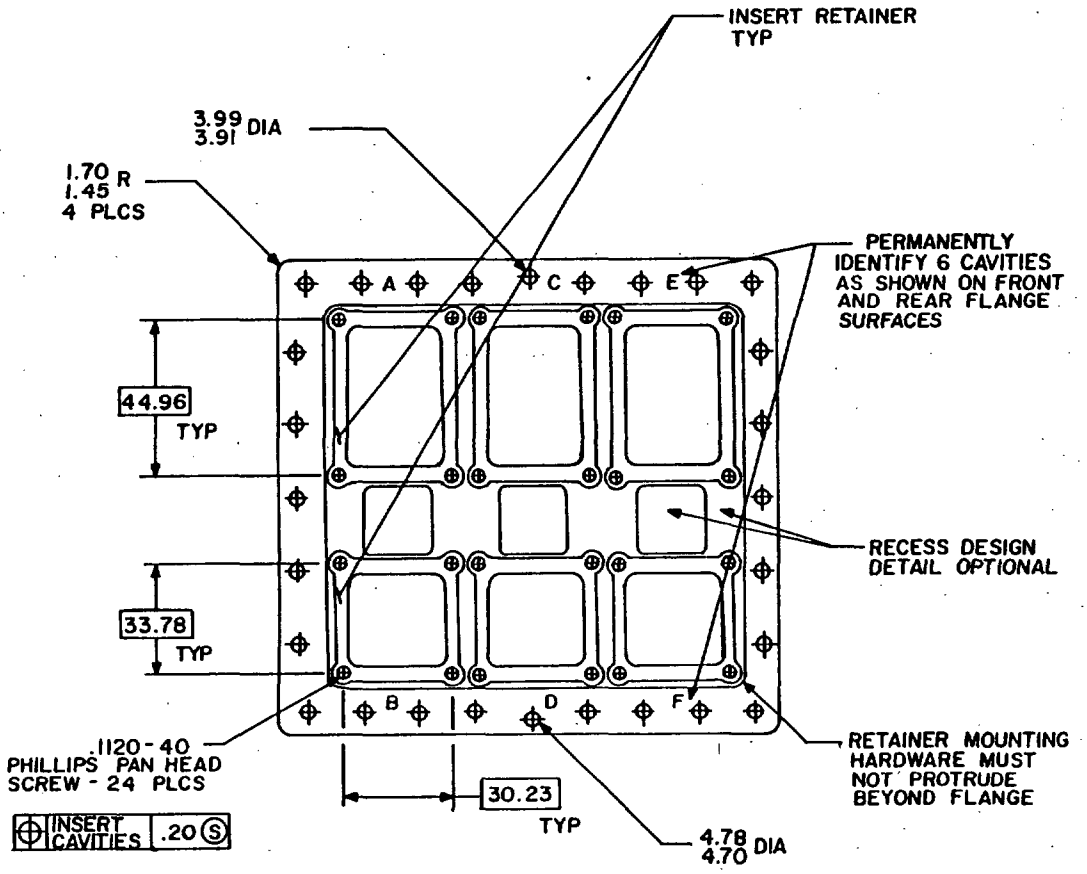

REAR VIEW

Size 22 contact cavity TP requirement

	Datum S						
Datum T	100.71(3.965)	100.74(3.966)	100.76(3.967)	100.79(3.968)	100.81(3.969)	100.84(3.970)	100.86(3.971)
107.06(4.215)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
107.09(4.216)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
107.11(4.217)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
107.14(4.218)	.28(.011)	.28(.011)	.28(.011)	.25(.010)	.23(.009)	.23(.009)	.20(.008)
107.16(4.219)	.25(.010)	.25(.010)	.25(.010)	.23(.009)	.23(.009)	.20(.008)	.18(.007)
107.19(4.220)	.23(.009)	.23(.009)	.23(.009)	.23(.009)	.20(.008)	.18(.007)	.18(.007)
107.21(4.221)	.20(.008)	.20(.008)	.20(.008)	.20(.008)	.18(.007)	.18(.007)	.15(.006)

FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

mm	Inch	mm	Inch	mm	Inch	mm	Inch
0.10	.004	2.67	.105	10.80	.425	41.02	1.615
0.15	.006	3.71	.146	10.92	.430	45.44	1.789
0.20	.008	3.91	.154	11.05	.435	45.54	1.793
0.25	.010	3.96	.156	16.97	.668	46.48	1.830
0.30	.012	3.99	.157	17.58	.692	50.14	1.974
0.38	.015	4.57	.180	18.11	.713	52.58	2.070
0.79	.031	4.67	.184	21.08	.830	53.09	2.090
1.40	.055	4.70	.185	22.53	.887	60.96	2.4
1.45	.057	4.78	.188	27.69	1.090	80.90	3.185
1.65	.065	4.88	.192	32.94	1.297	100.71	3.965
1.70	.067	5.08	.2	33.04	1.301	100.84	3.970
1.83	.072	5.46	.215	33.27	1.310	100.86	3.971
2.03	.080	5.84	.230	34.26	1.349	105.00	4.173
2.11	.083	6.40	.252	34.37	1.353	120.09	4.728
2.54	.1	8.26	.325	38.00	1.496	130.81	5.15
				38.96	1.534	131.31	5.170

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /96, /97, and /99.

Ⓐ Inserts: See DOD-STD-1842 and MIL-C-83527/8.

Mating connector: See MIL-C-83527/5.

Ⓐ Military part or identifying number (PIN):

M83527	/06-	A	002

Basic specification identifier

Specification sheet number

See footnote 1/

Insert designator from DOD-STD-1842

Ⓐ 1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3623-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.