
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (CABLE CONNECTING, THREADED COUPLING, CRIMP PIN CONTACTS), (SERIES II, CLASSES A, G, AND R)

This specification sheet is approved for use by the Engineering and Technical Support Division (AFLC), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

Ⓑ INACTIVE: USE MS3451 OF MIL-C-5015

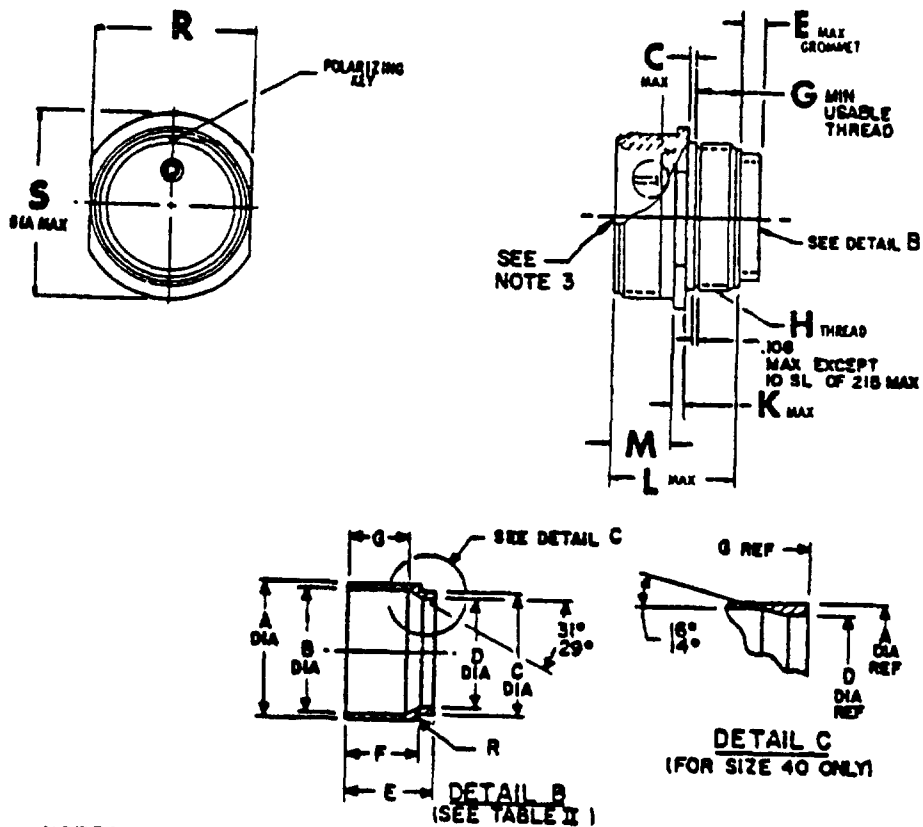


NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. ALL DIMENSIONS ARE AFTER PLATING.
Ⓑ 3. FOR DETAILS OF CONNECTOR FRONT END CONFIGURATION SEE PROCUREMENT SPECIFICATION.

Ⓑ Denotes revision



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. CONNECTOR DIMENSIONS

| SHELL SIZE PART NO DESIGNATION | MIL-C-5015 SIZE SHELL | C MAX | 1/ E MAX | G | H THREAD CLASS 2A | K MAX | L MAX | M | R | S |
|---|---|---|---|---|---|---|---|---|---|---|
| 08 | 8S | .056 | .400 | .375 | .438-28 UNEF | .11 | 1.135 | .577<br>.562 | .504<br>.496 | .729<br>.709 |
| 10 | 10S | .056 | .400 | ↑ | .500-28 ↑ | .11 | ↑ | ↑ | .629<br>.621 | .854<br>.834 |
| 11 | 10SL | .056 | .400 | | .562-24 | .11 | ↓ | ↓ | .629<br>.621 | .849<br>839 |
| 13 | 12S | .041 | .400 | | .625-24 | .13 | 1.135 | .577<br>562 | .754<br>.746 | .974<br>964 |
| 12 | 12 | .072 | .317 | | .625-24 | ↑ | 1.495 | .765<br>.750 | .754<br>746 | 974<br>964 |
| 15 | 14S | .041 | .400 | | .750-20 | | 1.135 | .577<br>.562 | .879<br>.871 | 1.099<br>1.089 |
| 14 | 14 | .072 | .317 | | .750-20 | | 1.495 | 765<br>.750 | 879<br>.871 | 1.099<br>1.089 |
| 17 | 16S | .041 | .400 | ↓ | .875-20 | ↓ | 1.135 | .577<br>.562 | 1.004<br>.996 | 1.224<br>1.214 |
| 16 | 16 | .072 | .317 | .375 | .875-20 | .13 | 1.495 | .765<br>.750 | 1.004<br>.996 | 1.224<br>1.214 |
| 18 | 18 | .072 | .380 | .500 | 1.000-20 | .16 | ↑ | ↑ | 1.129<br>1.121 | 1.349<br>1.339 |
| 20 | 20 | .056 | .380 | ↑ | 1.125-18 | ↑ | ↓ | ↓ | 1.254<br>1.246 | 1.474<br>1.464 |
| 22 | 22 | .056 | .380 | | 1.250-18 | | 1.495 | .765<br>.750 | 1.379<br>1.371 | 1.599<br>1.589 |
| 24 | 24 | .041 | .315 | ↓ | 1.375-18 ↓ | | 1.556 | .827<br>.812 | 1.504<br>1.496 | 1.715<br>1.705 |
| 28 | 28 | .041 | .315 | .500 | 1.625-18 UNEF | | 1.556 | .827<br>.812 | 1.754<br>1.746 | 1.974<br>1.964 |
| 32 | 32 | / | .260 | .531 | 1.875-16 UN | | 1.620 | .890<br>.875 | 2.004<br>1.996 | 2.224<br>2.214 |
| 36 | 36 | / | .260 | .531 | 2.125-16 UN | | 1.620 | .890<br>.875 | 2.254<br>2.246 | 2.474<br>2.464 |
| 40 | 40 | / | .260 | .531 | 2.375-16 UN | .16 | 1.620 | .890<br>.875 | 2.510<br>2.500 | 2.724<br>2.714 |

1/ When insulator arrangement sizes 18 thru 40 contain one or more size No. 0 contacts, E dimension will increase .150 max.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

TABLE II. DETAIL B DIMENSIONS

| SHELL SIZE | A | B | C | D | E | F | G | R |
|---|---|---|---|---|---|---|---|---|
| 8S | .280<br>.271 | .250<br>.237 | .245<br>.232 | .180<br>.167 | 427<br>.401 | 342<br>326 | 286<br>276 | |
| 10S | .340<br>.332 | .312<br>.299 | .298<br>.285 | .242<br>.229 | .420<br>.397 | 335<br>322 | .272<br>.262 | |
| 10SL | .409<br>.401 | .380<br>.367 | .378<br>.365 | 310<br>.297 | 430<br>.407 | 335<br>.322 | .237<br>.227 | |
| 12 & 12S | .460<br>.452 | 432<br>419 | 403<br>.390 | 355<br>342 | 418<br>.396 | 340<br>326 | .270<br>260 | |
| 14 & 14S | 563<br>.550 | 518<br>.505 | 485<br>472 | 448<br>435 | .414<br>391 | 339<br>326 | .261<br>.251 | .040<br>020 |
| 16 & 16S | .689<br>.676 | 644<br>631 | 605<br>.592 | 574<br>561 | 424<br>401 | .339<br>326 | .266<br>256 | .040<br>.020 |
| 18 | 806<br>.793 | 760<br>747 | 725<br>712 | 690<br>677 | .574<br>551 | 449<br>436 | 371<br>361 | .060<br>040 |
| 20 | .941<br>.928 | .894<br>.881 | 863<br>850 | 814<br>801 | 573<br>550 | 458<br>445 | 385<br>375 | ↑ |
| 22 | 1.059<br>1.046 | 982<br>969 | 973<br>.960 | 902<br>889 | 551<br>528 | 456<br>443 | 389<br>379 | |
| 24 | 1 170<br>1.157 | 1 106<br>1.093 | 1 085<br>1.072 | 1 026<br>1 013 | 547<br>524 | 457<br>444 | 385<br>375 | |
| 28 | 1 401<br>1 388 | 1.330<br>1.317 | 1.245<br>1.232 | 1 185<br>1 172 | 573<br>550 | 458<br>445 | 329<br>319 | |
| 32 | 1.652<br>1.639 | 1 608<br>1.595 | 1.515<br>1.502 | 1 440<br>1 427 | 544<br>521 | 459<br>446 | 316<br>306 | ↓ |
| 36 | 1.860<br>1.847 | 1.796<br>1.783 | 1.751<br>1.738 | 1.653<br>1 640 | 573<br>550 | 463<br>450 | 355<br>345 | 060<br>040 |
| 40 | 2.105<br>2.092 | 2.000<br>1.989 | | 1 905<br>1 892 | 823<br>800 | | 379<br>279 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.


This receptacle mates with MIL-C-83723/23(USAF).

(B) For insert arrangements see MIL-STD-1651.

Rear hardware per MIL-C-83723/27, /35, or /50(USAF) must be used for correct wire sealing.

(B) Insert positions and alternate rotations: The letter N indicates normal (or standard) insert position. Alternate positions are identified in MIL-STD-1651.

Part number example:

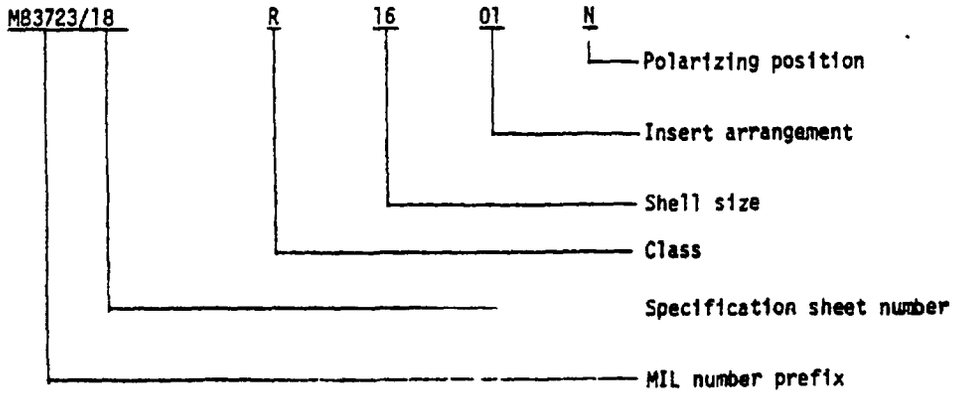


Custodian:
Air Force - 85

Review activities:
Air Force - 11, 15, 17, 99

Preparing activity:
Air Force - 85

(Project 5935-F024-2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

**INSTRUCTIONS:** The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/18B (USAF) Connectors, Electrical, (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER FSC 5935

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

| SUBMITTED BY *(Printed or typed name and address - Optional)* | TELEPHONE NO |
|---|---|
| | DATE |

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

AFLC/LOIE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.