INCH-POUND

MIL-DTL-83723/90G
w/AMENDMENT 1
12 March 2024
SUPERSEDING
MIL-DTL-83723/90G
23 January 2015

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER OR WELD FLANGE MOUNT, THREADED COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H, J, L, N, P AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.


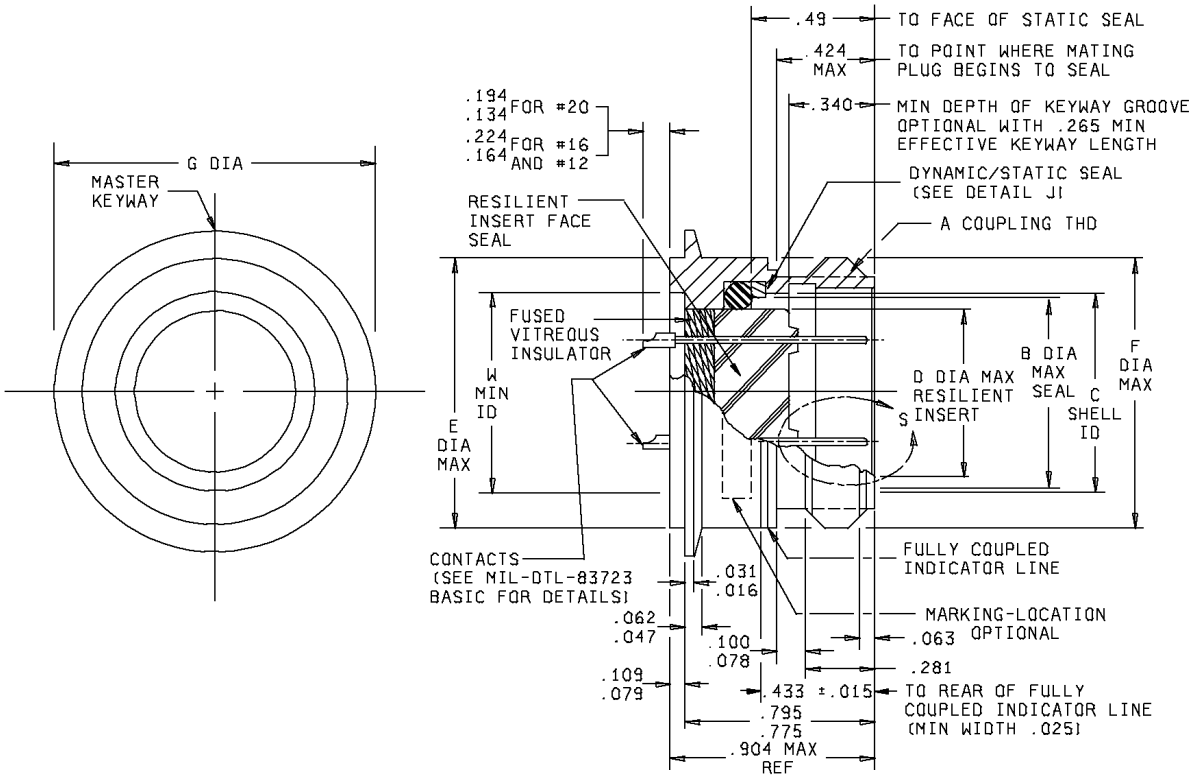


FIGURE 1. Dimensions and configurations.


AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

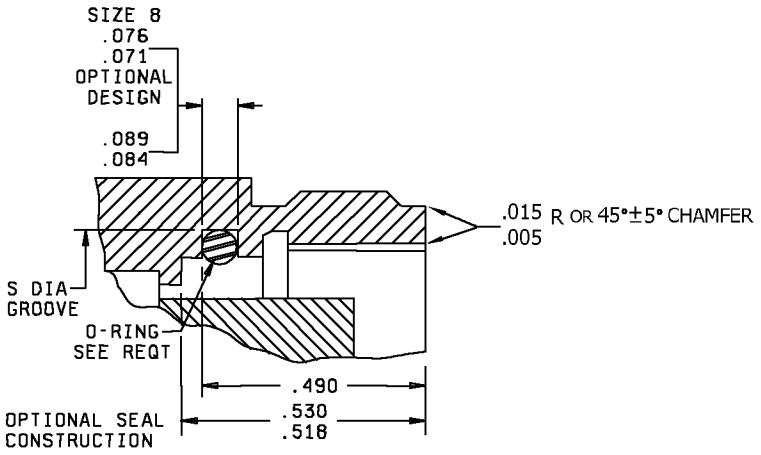

DETAIL J

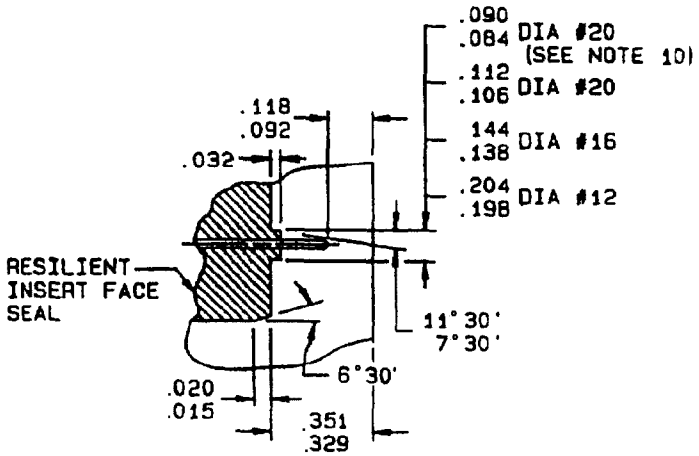

DETAIL S

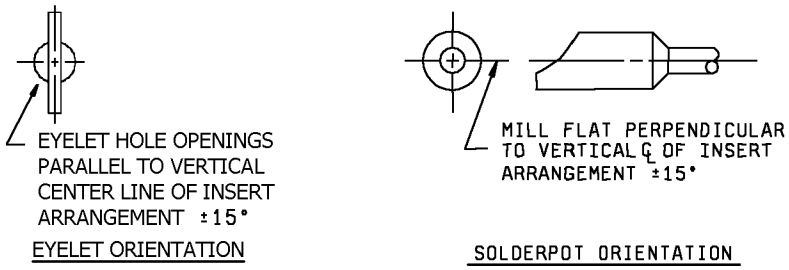

EYELET ORIENTATION

SOLDERPOT ORIENTATION

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Shell size	A Thread UNEF-2A	B	C	D	E	F
08	.562-24	.394	.418 .413	.290	.500 .494	.562
10	.688-24	.515	.535 .530	.388	.562 .556	.696
12	.875-20	.685	.700 .705	.558	.750 .744	.875
14	.938-20	.754	.774 .769	.627	.812 .806	.936
16	1.062-18	.881	.901 .896	.772	.937 .931	1.062
18	1.188-18	.987	1.007 1.002	.860	1.062 1.056	1.187
22	1.438-18	1.237	1.257 1.252	1.110	1.312 1.306	1.437

Shell size	G	W	X	S +.005 -.000
08	.723 .703	.400	.510	.490
10	.850 .830	.411	.572	.636
12	1.055 1.035	.581	.760	.806
14	1.100 1.080	.650	.822	.875
16	1.220 1.200	.765	.947	1.002
18	1.350 1.330	.864	1.072	1.108
22	1.600 1.580	1.133	1.322	1.358

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

NOTES: (Notes 4 through 8 applicable to contacts only.)

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 inches (0.13 mm) for three place decimals and ± .01 inches (0.25 mm) for two place decimals and ± 1° for all angles.
4. Dimensions apply after plating.
5. Surface finish: 63 ( ) all over in accordance with ASME-B46.1, unless otherwise specified.
6. Remove all burrs and sharp edges .003 to .005 inches (0.076 to 0.127 mm) R.
7. Diameters to be concentric within .004 inches (0.102 mm) TIR.
8. Diameter in the same cross-sectional plane to be concentric with each other within .003 inches (0.076 mm) TIR.
9. Shell size 8 will not mate with MIL-DTL-26500 connectors.
10. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MIL-DTL-83723/86, /91, /95 and /97.

Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
08	03, 98	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Connector accessories: See SAE-AS85049.

O-ring: See MIL-DTL-83723.

Part or Identifying Number (PIN) example:

M83723/ 90 H 08 03 N

M83723/	Military designation
90	Specification sheet number
H	Class
08	Shell size
03	Insert arrangement
N	Polarizing position

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-26500
MIL-DTL-83723/86
MIL-DTL-83723/91
MIL-DTL-83723/95
MIL-DTL-83723/97
MIL-STD-1554
ASME-B46.1
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19

(Project 5935-2024-099)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.