INCH-POUND
MIL-DTL-83723/93D
w/AMENDMENT 1
12 March 2024
SUPERSEDING
MIL-DTL-83723/93D
1 October 2010

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SOLDER OR WELD FLANGE MOUNT, BAYONET COUPLING, STRAIGHT PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

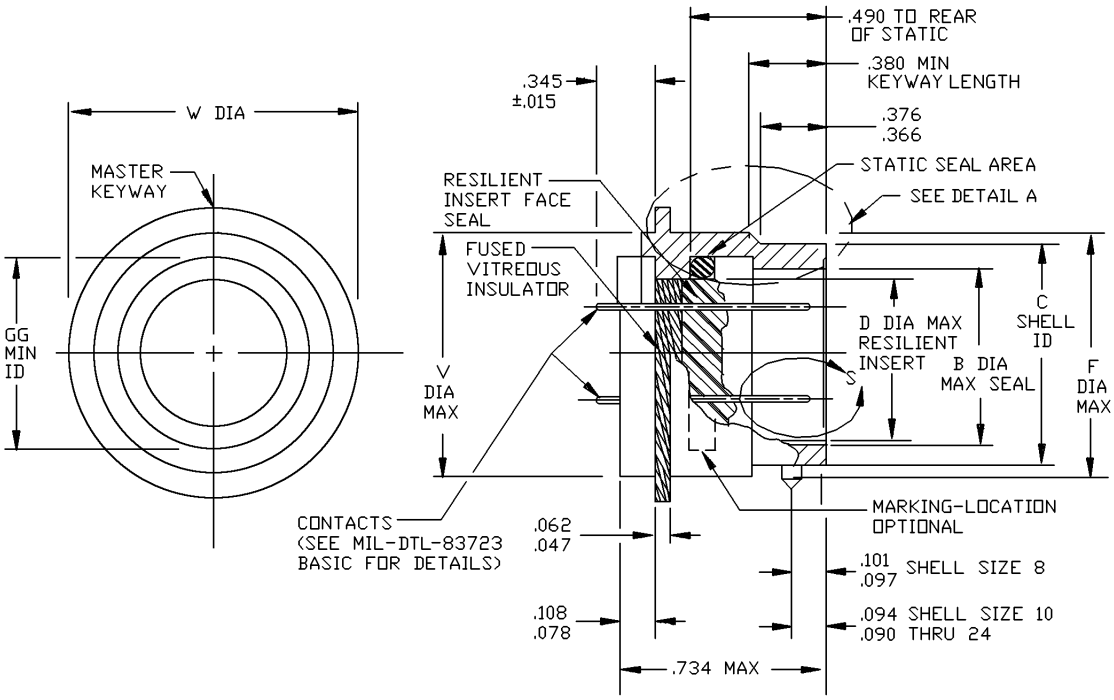


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

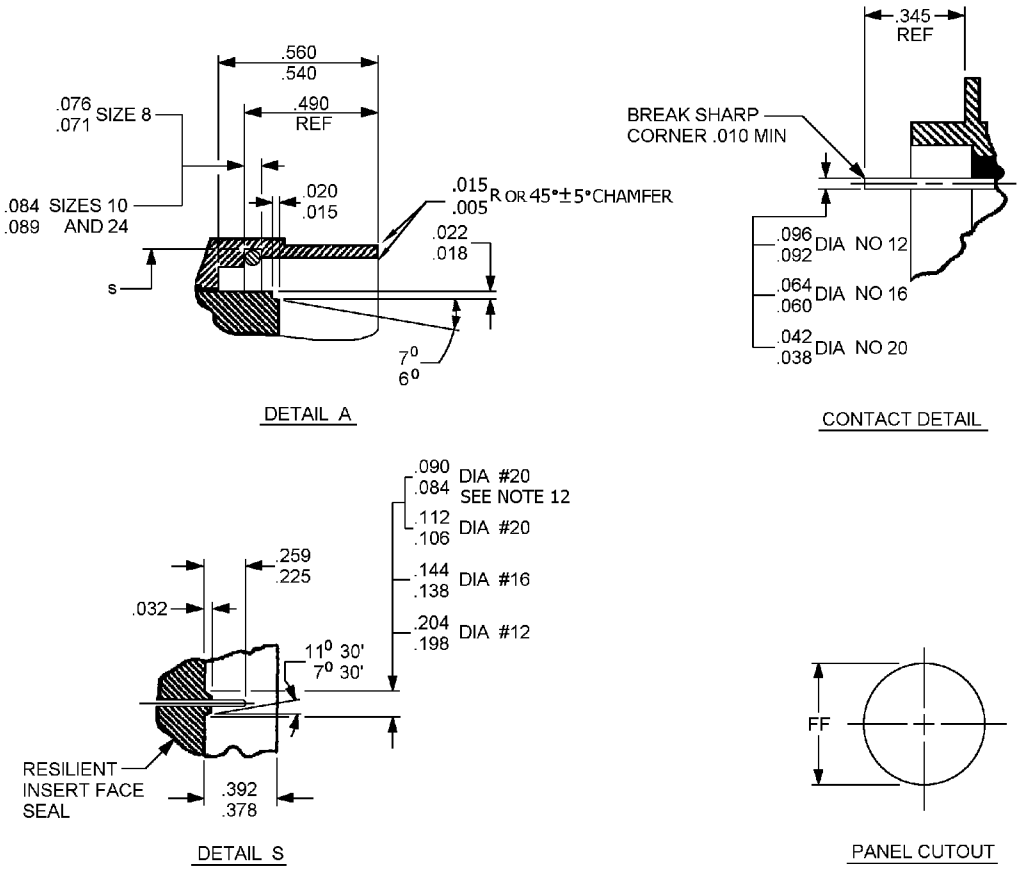


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Shell size	C	D	E	F	S +.005 -.000	V	W	FF	GG
08	.428 .433	.312	.536 .531	.561	.508	.500	.760 .720	.505 .515	.406
10	.530 .535	.388	.659 .654	.696	.636	.562	.860 .820	.567 .577	.443
12	.700 .705	.558	.829 .824	.875	.806	.750	1.065 1.025	.755 .765	.668
14	.769 .774	.627	.898 .893	.935	.875	.812	1.110 1.070	.817 .827	.668
16	.896 .901	.772	1.025 1.020	1.062	1.002	.937	1.230 1.190	.942 .952	.763
18	1.002 1.007	.860	1.131 1.126	1.187	1.108	1.062	1.360 1.320	1.067 1.077	.862
20	1.127 1.132	.985	1.256 1.251	1.312	1.233	1.187	1.450 1.410	1.192 1.202	1.108
22	1.252 1.257	1.110	1.381 1.376	1.437	1.358	1.312	1.610 1.570	1.317 1.327	1.204
24	1.377 1.382	1.235	1.506 1.501	1.562	1.483	1.437	1.730 1.690	1.442 1.452	1.388

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 inches (0.13mm) for three place decimals, ± .01 inches (0.25mm) for two place decimals, and ± 1° for all angles.
4. Notes 5 through 10 applicable to contacts only.
5. Dimensions apply after plating.
6. Contact finish: Gold plate .000050 inch (0.00127 mm) minimum in accordance with ASTM B488. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
7. Surface finish: 63 ($\sqrt{63}$) all over in accordance with ASME-B46.1 unless otherwise specified.
8. Remove all burrs and sharp edges .003 to .005 inches (0.076 to 0.127 mm) R.
9. Diameters to be concentric within .004 inches (0.102 mm) TIR.
10. Diameters in the same cross-sectional plane to be concentric with each other within .003 inches (0.076 mm) TIR.
11. Three (3) pins to be located within .004 inches (0.102 mm) either side of (TP) relative to master polarizing keyway.
12. See table I for contact cavities requiring these dimensions.

FIGURE 1. Dimensions and configurations – Continued.

REQUIREMENTS

Dimensions and configuration: See figure 1.

This connector mates with MIL-DTL-83723/75 and /77.

Insert arrangements and polarizing positions: See MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
08	03, 98	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Connector accessories: See SAE-AS85049.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

M83723/	93	H	08	03	N

M83723/	Military designation
93	Specification sheet number
H	Class
08	Shell size
03	Insert arrangement
N	Polarizing position

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-DTL-83723/75
MIL-DTL-83723/77
MIL-STD-1554
ASME-B46.1
ASTM B488
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2024-102)

Review activities:
Army – AR, MI
Navy – EC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.