FED. SUP CLASS
2805

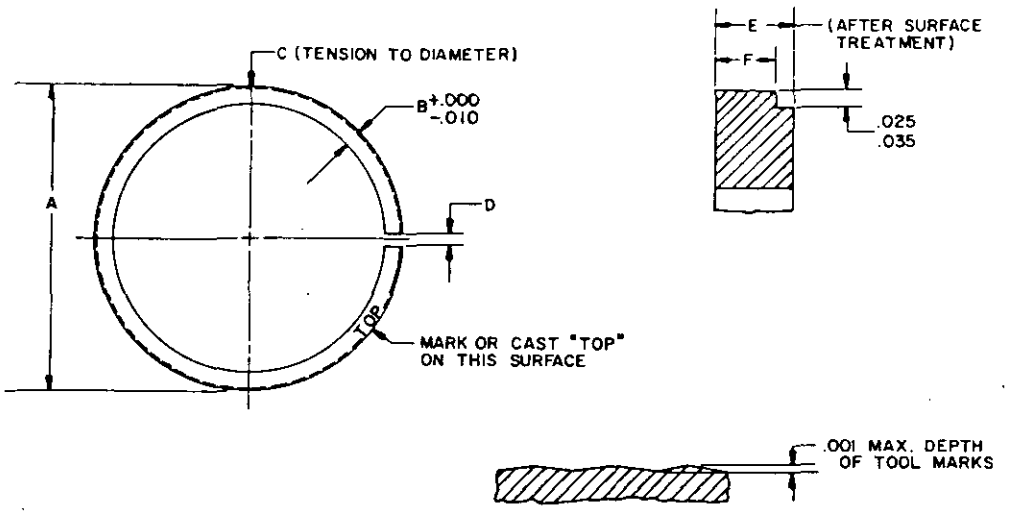

DASH NUMBER	A	B	C	D	E	F	SIZE
-25	2.250	.104 / .094	4 LBS. MIN.	.017 / .007	.0940 / .090	.066 / .076	STD
-26	2.270	.104 / .094	4 LBS. MIN.		.040 / 0	.068 / .078	+ .020
-27	2.290	.104 / .094	4 LBS. MIN.			.066 / .078	+ .040
-28	2.500					.068 / .076	STD.
-29						.066 / .078	+ .020
					.0940 / .090	.066 / .076	+ .040

(E) CANCELED AFTER 21 APRIL 1982
NO SUPERSEDING STANDARD.

NOTES:

1. WEIGHT PERMISSIBLE.
2. CHEMICAL AND PHYSICAL PROPERTIES SHALL CONFORM TO AMS 7310.
   CHEMICALLY TREATED FOR SCUFF AND CORROSION RESISTANCE.
3. TOLERANCES: UNLESS OTHERWISE SPECIFIED. LINEAR MACHINED DIMENSIONS ± .010: ANGULAR MACHINED DIMENSIONS ± 0° 30'. DO NOT SCALE DRAWING.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. ALL DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED.
7. THE "MS" PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER EXAMPLE: MS 13932-1.
8. MS 13932-1 THRU -24 AND MS 13932-34 THRU -39 ARE REPLACED BY MS 39349 WITH THE SAME DASH NUMBERS RESPECTIVELY.
9. FOR PROCUREMENT PURPOSES OF RINGS FOR MS PISTONS SEE MS 39351.
10. RINGS ARE TO BE PROCURED AS SETS ONLY

(D) ENTIRE STANDARD REVISED

REVIEW ACTIVITIES: AT
USER ACTIVITIES: YD, MC

APPROVED 19 JUNE 1952 REVISED (D) 19 MAY 1972 (E) 21 APRIL 1982

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTIONS FOR USE BY NAVY ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY - ME Other Cust A. F. - 82	TITLE RING, PISTON: ENGINE INTERMEDIATE COMPRESSION	MILITARY STANDARD MS 13932
PROCUREMENT SPECIFICATIONS MIL-E-11275	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:30Z
Check the source to verify that this is the current version before use.