FED. SUP CLASS
5950

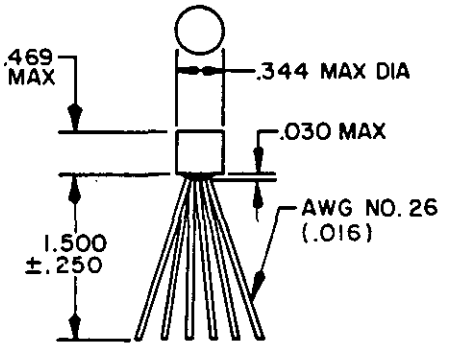

INCHES	MM
.016	.41
.030	.76
.250	6.35
.344	8.74
.469	11.91
1.500	38.10

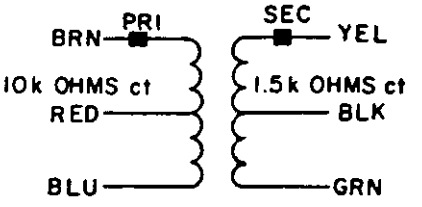

WORKING VOLTAGE : 49V PEAK
FREQUENCY RANGE : 300 Hz TO 20 kHz
POWER LEVEL : 125 MW
BRN-RED-BLU = 10k OHMS ct
YEL-BLK-GRN = 1.5k OHMS ct

CIRCUIT DIAGRAM AND MARKING

Ⓐ CANCELED AFTER 14 AUGUST 1979
USE MIL-T-27/172-34

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in schematic.
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

Ⓐ DENOTES CHANGES

P.A. AF-85 Other Cust	INTERNATIONAL INTEREST	TITLE Ⓐ TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TYPE TF5R21ZZ	MILITARY STANDARD MS21412 (USAF)
Procurement Specifications MIL-T-27	SUPERSEDES:		SHEET PAGE 1 OF 1

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5950-F188-15

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/3314

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:38Z
Check the source to verify that this is the current version before use.

APPROVED 11 MAR 1974 REVISED Ⓐ 14 AUG 79

This military standard has been approved by the Directorate of Electronic Support (AFALD/PTS), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Review Activity:
AF - 99