NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
1680

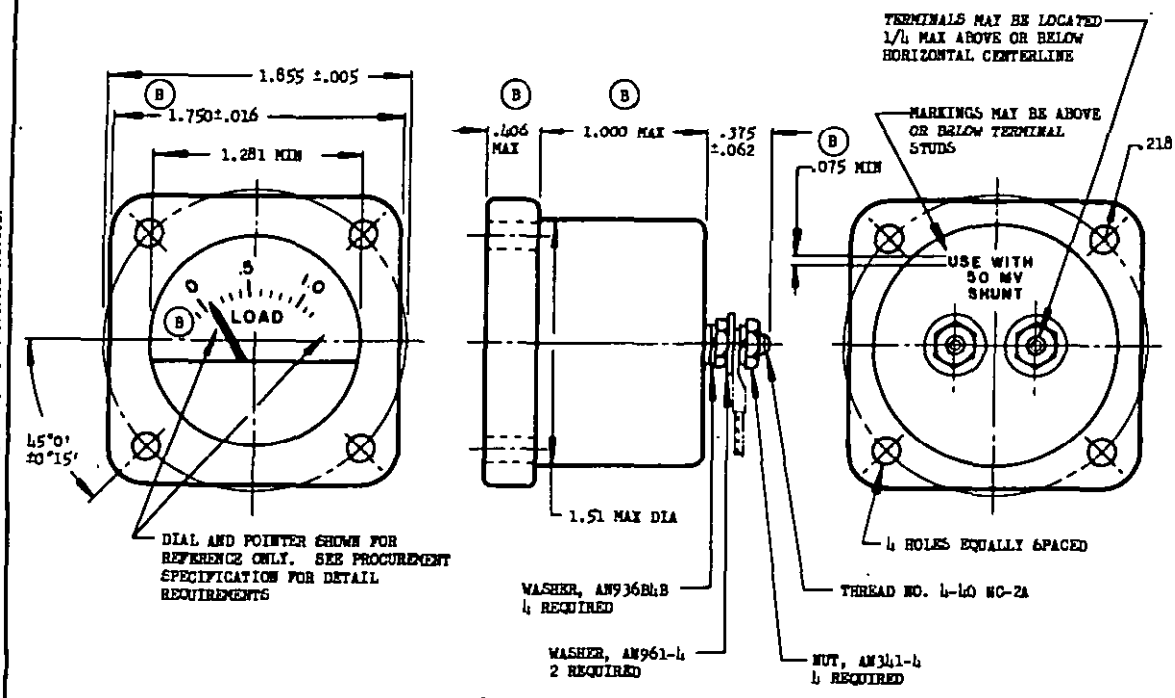

DASH NO.	FIG.	MOUNTING NUT PROVISION	HOLE DIA
-1		NONE	.145 ±.002
-2		(B) WITH TINNERMAN PART NO. 08940-632-24 OR EQUAL	.145 +.005 -.002 WITH NUT INSTALLED

ZERO ADJUSTMENT NOT REQUIRED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.
THESE LOADMETERS TO BE USED WITH EXTERNAL SHUNTS IN ACCORDANCE WITH SPECIFICATION MIL-S-61.
ACCURACY ±3 PER CENT.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 Dec 53 REVISED (A) 23 May 56 (B) 7 Apr 58

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS25025 (ASG)
Navy - BuAer Air Force	A - N - AF -	LOADMETER, DIRECT CURRENT, AIRCRAFT	
PROCUREMENT SPECIFICATION MIL-A-6752	SUPERSEDES:		SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

DD FORM 672-1
1 OCT 52