PROJECT NO. 6115-N307

PRO. SUP CLASS 6115

5 HOLES $\frac{.202}{.192}$ DIA +.006 MAX. TAPER SPACED AS SHOWN. HOLES MUST BE WITHIN .005 OF NOMINAL ℄ LOCATION IN A CIRCUMFERENTIAL DIRECTION. HOLE CIRCLE MUST BE CONCENTRIC WITH $\frac{5.140}{5.130}$ (REF) DIA WITHIN .010 MAX. TOTAL INDICATOR READING.

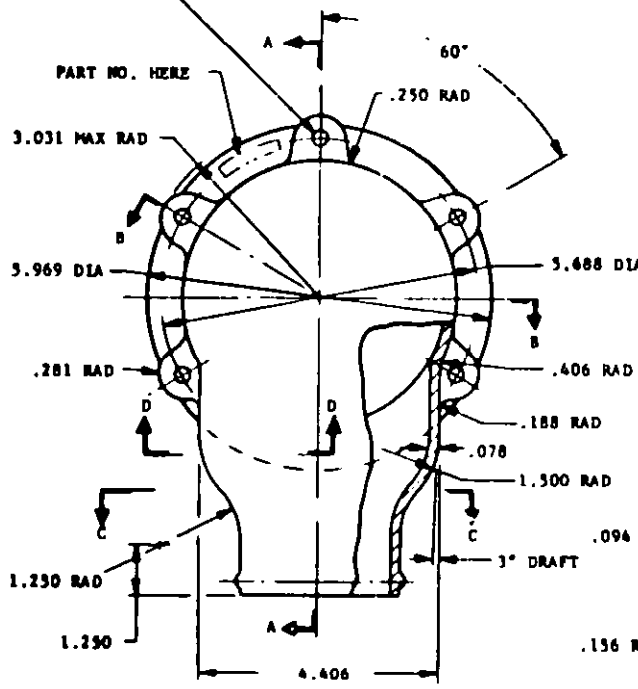

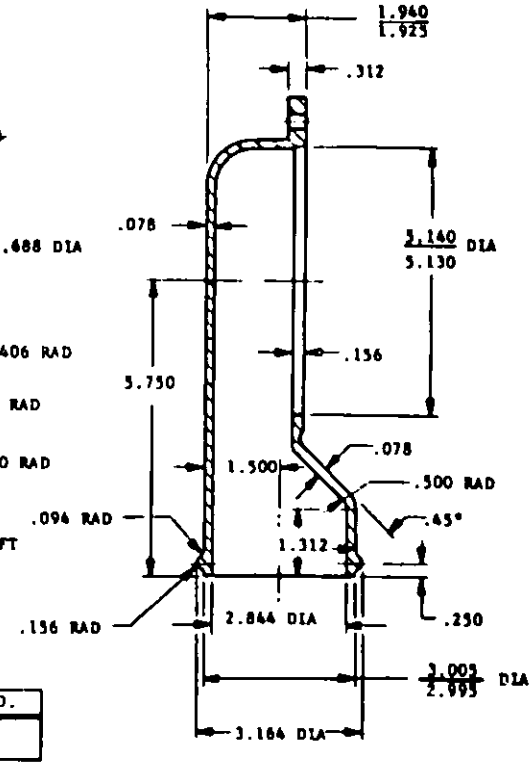

SECTION A-A

DASH NO.
-1

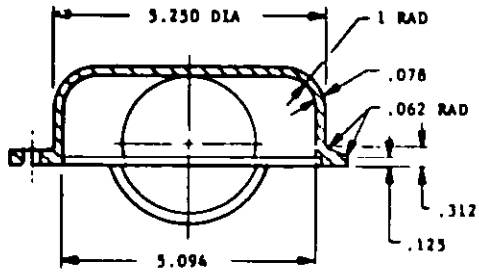

SECTION B-B

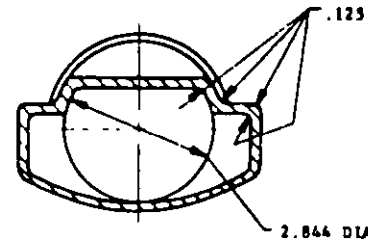

SECTION C-C



SECTION D-D

MATERIAL: ALUMINUM, DIE CAST, SPECIFICATION QQ-A-591, ALLOY NO. 380.

FINISH: ANODIZE, SPECIFICATION MIL-A-8625.

WEIGHT: .750 POUND.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.010, ANGLE ±1/2°

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 28 SEPT 55 REVISED (A) 12 Dec 72

P.A. NAVY - AS Other Cust	TITLE ADAPTER, GENERATOR TO AIR DUCT, RADIAL, 1 INCH	MILITARY STANDARD MS25160 (AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 MAY 67 672-1 (Limited coordination)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973 -714-542 1717

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.