FED. SUP CLASS
6610

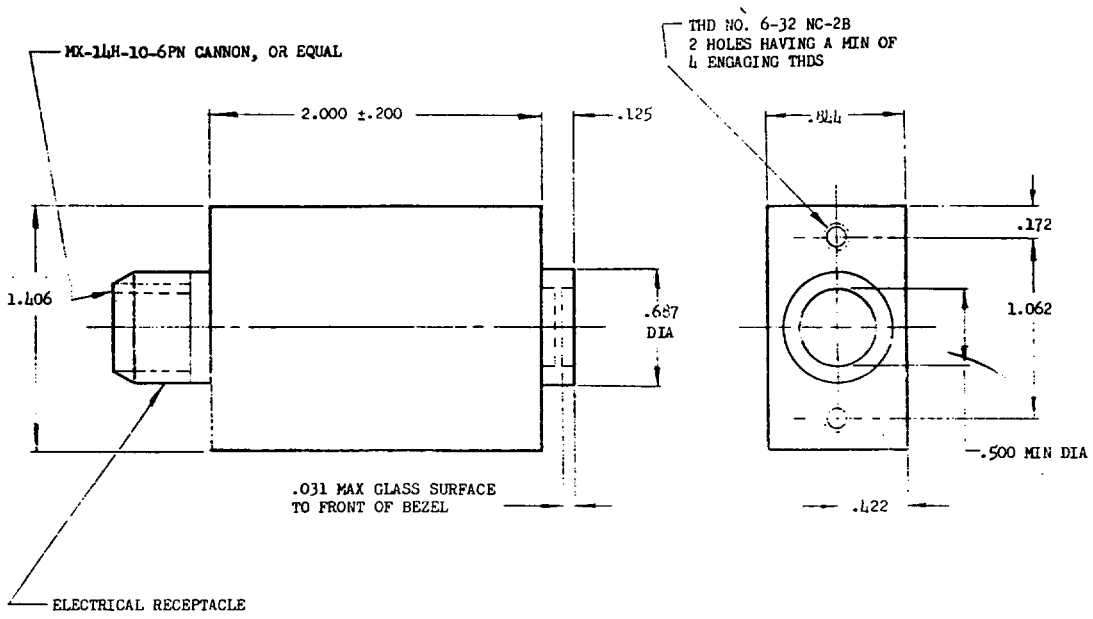

DASH NO.	INTEGRAL LIGHT
-1	RED
-2	WHITE

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

THE APERTURE AND ELECTRICAL CONNECTORS SHALL BE CENTERED WITH REFERENCE TO CASE CENTERLINES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 Sept 64 REVISED

This standard has been approved by the Bureaus (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - Wep	TITLE INDICATOR, POSITION, LANDING GEAR, SYMBOL-INDICATING, INTEGRALLY LIGHTED	MILITARY STANDARD MS27202(ASG)
PROCUREMENT SPECIFICATION MIL-I-25931	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.