INCH-POUND

MIL-DTL-25988/4A
29 June 2021

SUPERSEDING
MIL-R-25988/4 (USAF)
23 November 1971

**DETAIL SPECIFICATION SHEET**


# RUBBER, FLUOROSILICONE, ELASTOMER, OIL- AND FUEL-RESISTANT, O-RINGS, CLASS 1, GRADE 80

This specification is approved for used by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-25988.

Scope. This specification sheet describes a standardized part numbering system for the procurement of Fluorosilicone Elastomer Rubber Oil and Fuel Resistant O-Rings, Class 1, Grade 80, intended for use in packing glands as specified in MIL-G-5514.

Part or identifying number (PIN). The PIN shall consist of the prefix M25988/4, followed by the assigned dash number for o-rings. See MIL-DTL-25988/1 for o-ring drawing and dimensions.

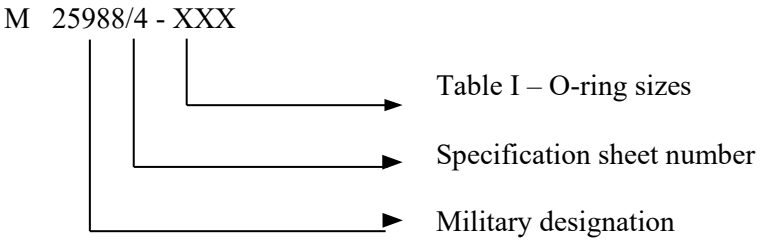


Referenced documents. In addition to MIL-DTL-25988, this document references MIL-G-5514, Gland Design; Packings, Hydraulic, General Requirements for.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

AMSC N/A FSC 5331

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:43Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - MR
Navy - AS
Air Force – 20
DLA - CC

Preparing activity:
Air Force – 20

Review activities:
Army – MI
Navy – OS
Air Force – 71

Agent:
Air Force - 110
(Project 5331-2021-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:43Z
Check the source to verify that this is the current version before use.