MILITARY SPECIFICATION

INDICATOR, BEARING-DISTANCE-HEADING
ID-526A/ARN AND ID-798/ARN

This amendment forms a part of MIL-I-25992A(USAF), dated 10 SEP 59, and is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.1 Delete and substitute:
"1.1 Scope. This specification covers two type of aircraft Bearing-Distance-Heading indicators ID-526 A/ARN and ID-798/ARN.

1.2 Classification. The indicators shall be of the types, as specified (see 6.2): ID-526A/ARN Integral Red Lighting and ID-798/ARN Integral White Lighting".

* Delete "2.1" and add:
"2.1 Government documents."

* Add:
"2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation."

* Under SPECIFICATIONS, Add:
"Federal

L-P-378	Plastic Sheet and Strips Thin Gauge, Polyolefin.
PPP-B-601	Boxes, Wood, Cleated Plywood.
PPP-B-636	Box, Shipping, Fiberboard."

Add boxed paragraph to bottom center of page.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improvng this document should be addressed to: Oklahoma City Air Logistics Center/MMEDO, Tinker AFB OK 73145-5990 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

* Under SPECIFICATION, Military delete "MIL-E-5272", "MIL-P-7936", "MIL-T-9107", "MIL-T-21200"; "MIL-R-25717" and add: "MIL-P-116 Preservation-Packaging, Methods of" MIL-L-27160 Lighting, Instrument Integral, White General Specification for" "MIL-T-28800 Test Equipment, For Use with Electronic and Electrical, General Specification For".

PAGE 2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-20T07:43Z
Check the source to verify that this is the current version before use.

* Under Standard, Military add:
"MIL-STD-129 Marking For Shipment and Storage
MIL-STD-785 Reliability Program for Systems and Equipment Development and Production
MIL-STD-794 Part and Equipment, Procedures for Packaging and Packing of
MIL-STD-810 Environmental Test Methods and Engineering Guidelines".

Under DRAWINGS, revise titles as follows:
"55C12983 Face Design-ID-526A/ARN and ID-798/ARN Indicator, Bearing-Distance-Heading
58D4054 Wiring Diagram-ID-526A/ARN and ID-798/ARN Bearing-Distance-Heading Indicator, Schematic.

Delete that portion of the document list titled "PUBLICATION".

* Add:
"2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

ASTM D3951 Packaging, Commercial

(Application for copies should be addressed to: ASTM, 1916 Race St, Philadelphia PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)"

3.2.1 Line 1: Delete "ID-526A/ARN".

* 3.2.5 Line 2 delete "MIL-R-25717" and add: "MIL-STD-785".

3.2.5.1 Line 1 delete "ID-526A/ARN".

3.2.5.3 Line 1 delete "ID-526A/ARN".

3.2.6.1 Line 3 delete "MIL-T-21200" and add: "MIL-T-28800".

3.2.6.2 Line 2 delete "ID-526A/ARN".

PAGE 4

3.3 Line 1 delete "ID-526A/ARN".

PAGE 6

3.3.2.3 Line 2 add: "or MIL-L-27160, as applicable" at end of sentence 1.

3.3.2.3.1 Line 2 delete "in conjunction with red filtering material" and add "(red filtering material is required when used on the ID-526A/ARN indicator)".

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:43Z
Check the source to verify that this is the current version before use.

PAGE 8

3.4 Line 1 following "ID-526A/ARN" add "or ID-798/ARN".

3.5 Line 1 delete "ID-526A/ARN".

PAGE 9

* Add:
"3.6.2.5 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item."

* Delete "4.1" and add:
"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

* Add;
"4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

4.2 Line 2, Following "ID-526A/ARN" add "or ID-798/ARN".

PAGE 12

* Delete "4.4.3".

PAGE 13

Replace "figure 1" in its entirety and add: "new figure 1" of this amendment on page 7.

PAGE 15

4.5.2.9 Line 2: Following "MIL-L-25467" and add "or MIL-L-27160, as applicable".

* 4.5.3 Line 3: delete "MIL-E-5272" and add: "MIL-STD-810D (810C for Vibration)".

PAGE 16

Source: https://assist.dla.mil -- Downloaded: 202610-20T07:43Z
Check the source to verify that this is the current version before use.

* 4.5.3.1 Line 1 delete "Procedure II" and add: "Method 501.2 and 502.2 on MIL-STD-810D Procedure II". Line 2 delete "each temperature" and add: 71°C and -54°C".

* 4.5.3.2 Line 1 delete "Procedure I" and add: "Method 507.2 on MIL-STD-810D Procedure III".

* 4.5.3.3 Line 1 delete "Procedure II" and add: "Method 500.2 on MIL-STD-810D, Procedure II". Line 2 after feet add: ", attitude change rate 1500 ft/min,".

* 4.5.3.4 Line 1 after spray add: "Method 509.2 on MIL-STD-810D, procedure".

* 4.5.3.5.1 Line 1 delete "Procedure IV" add: "Method 514.2 of MIL-STD-810C, Procedure I, paragraph 4.5.1.3". Line 5 after inch add: ", and ranging from 5 to 50 Hz".

* 4.5.3.6 Line 1 delete "Procedure I" and add: "Method 508.3 on MIL-STD-810D" and after of add: "28 days exposure on".

PAGE 17

* Delete "4.5.5.1 and add:"
4.5.5.1 Functional reliability test. Each equipment shall be subjected to a 7-hour functional reliability test. At least 98 percent of the equipments shall complete this test without failure.

PAGE 18

* 4.5.6.1 Line 1 after Vibration. add: "Method 514.2 of MIL-STD-810C, Procedure I, paragraph 4.5.1.3".

4.5.6.3 Delete.

Add the following new paragraph 4.7:
"4.7 Inspection and test. Tests of methods of preservation and packaging shall be accomplished in accordance with Section 4 of MIL-P-116 to insure compliance with Section 5 of this specification."

PAGE 19

* Delete Section 5 in its entirety and add:

"5 PACKAGING

5.1.1.1 Cleaning. Indicators shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Indicators shall be dried in accordance with process D-4 of MIL-P-116.

5.1.1.3 Preservation application. Not applicable.

5.1.1.4 Unit packaging. Unless otherwise specified by the contracting activity,

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:43Z
Check the source to verify that this is the current version before use.

each indicator shall be packaged in quantity unit packs of one each in accordance with Method IIC of MIL-P-116. Overbox completed pack in PPP-B-636 container. Apply sufficient cushioning material between bag and unit container of a type, denisty, and thickness to insure shock transmission does not exceed peak values in G's established for the indicator when completed packs are subjected to the rough handling drop tests of MIL-P-116.

5.1.2 Level C. Each indicator shall be clean, dry, and individually packaged in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity.

5.1.3 Industrial. The Industrial preservation of indicator shall be in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, C, or Industrial as specified (see 6.2).

5.2.1 Level A. Indicators packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-601, Styles A or B, class overseas, unless otherwise specified by the contracting activity. Insofar as practical, exterior shipping container shall be of uniform shape, size minimum tare and cube consistant with the protection required.

5.2.2 Level B. Indicators packaged as specified in 5.1.1 shall be packed in shipping containers conforming to PPP-B-636, class weather-resistant, unless otherwise specified by the contracting activity. Other requirements as specified in 5.2.1 apply.

5.2.3 Level C. Packing shall be applied which affords adequate protection during domestic shipment from the supply source to the first receiving activity for immediate use. This level shall conform to applicable carrier rules and regulations.

5.2.4 Industrial. The packaged indicators shall be packed in accordance with ASTM D3951.

5.3 Marking. In addition to any other markings required by the contract or order (see 6.2), interior and exterior containers shall be marked in accordance with MIL-STD-129."

6.1 Line 1: Following "ID-526A/ARN" add "and ID-798/ARN".

6.2.,: Delete and add:
"6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Type of indicator required (see 1.2)
c. Levels of packaging and packing required
d. Point of delivery for preproduction test samples."

The margins of this amendment are marked with an asterisk to indicate where

Source: https://assist.dla.mil -- Downloaded: 202640-20T07:43Z
Check the source to verify that this is the currentversion before use.

changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a conveninece only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
AIR FORCE - 99

Preparing Activity:
AIR FORCE - 71

Project Number:
6605 - F359

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:43Z
Check the source to verify that this is the current version before use.

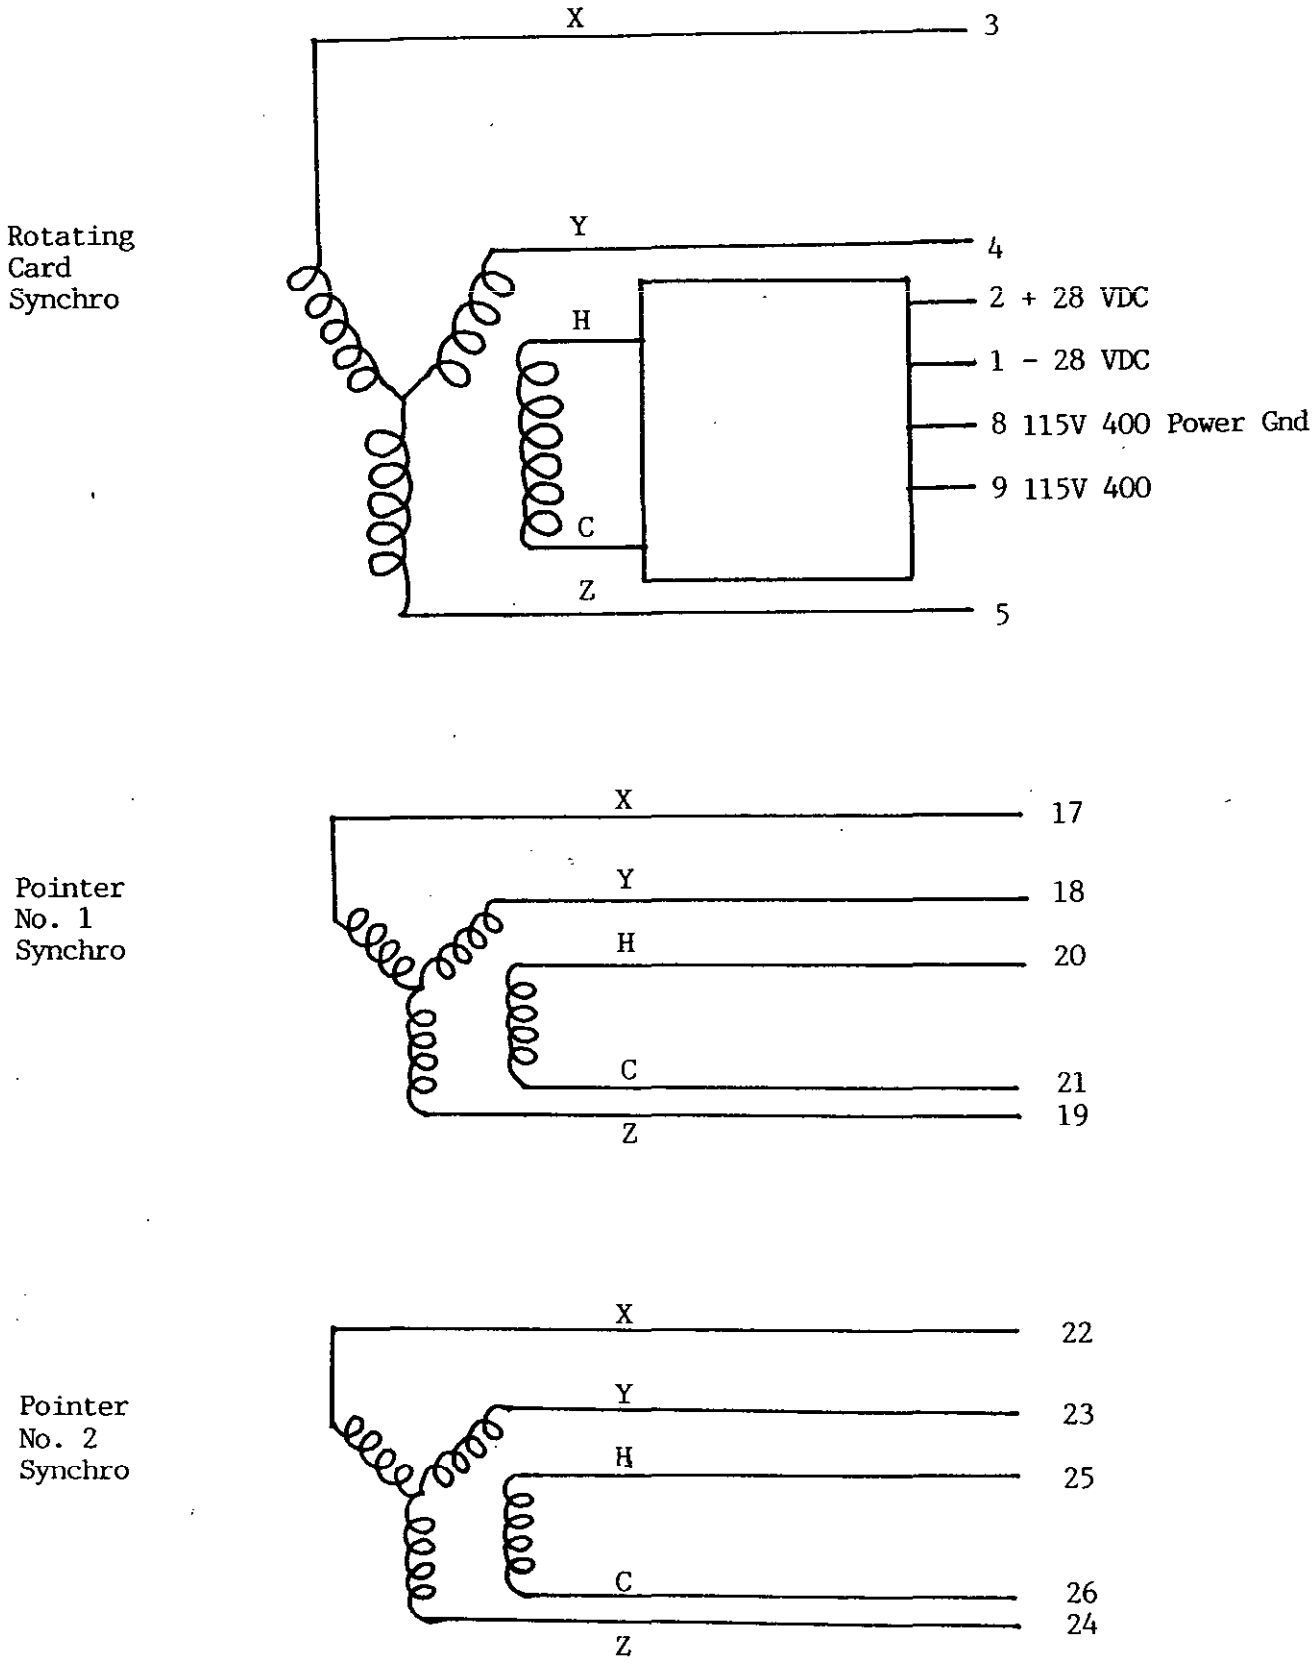


FIGURE 1. Pin Numbering

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:43Z
Check the source to verify that this is the current version before use.