INCH-POUND

MIL-R-39016/32F
31 July 2006
SUPERSEDING
MIL-R-39016/32E
4 August 1994

MILITARY SPECIFICATION SHEET

# RELAYS, ELECTROMAGNETIC, DPDT, LOW LEVEL TO 2 AMPERES (LATCHING)

Inactive for new design after 4 August 1994.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39016.


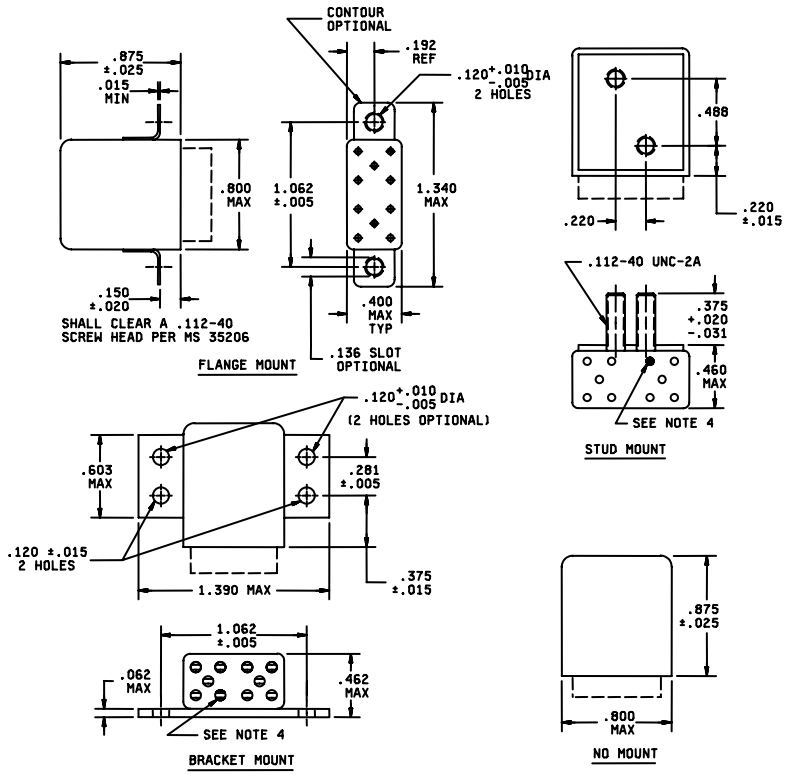



FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

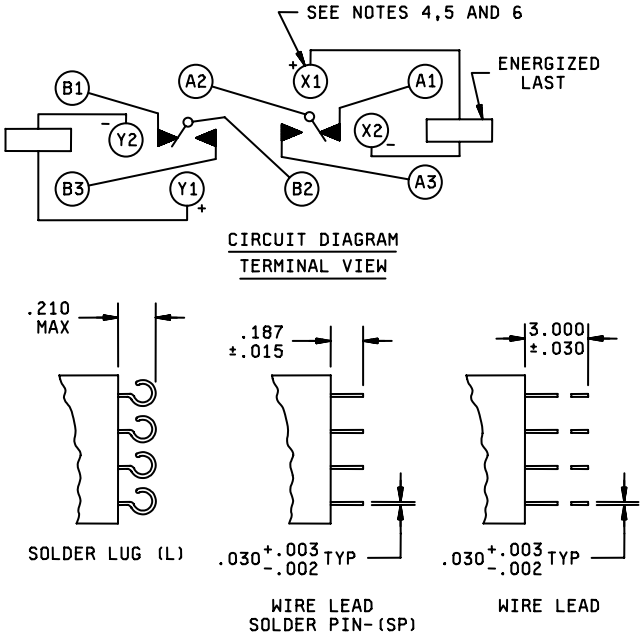


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .002 | 0.05 | .030 | 0.76 | .150 | 3.81 | .375 | 9.52 | .800 | 20.32 |
| .003 | 0.08 | .031 | 0.79 | .187 | 4.75 | .400 | 10.16 | .875 | 22.22 |
| .005 | 0.13 | .062 | 1.57 | .192 | 4.88 | .460 | 11.68 | 1.062 | 26.97 |
| .010 | 0.25 | .100 | 2.54 | .200 | 5.08 | .462 | 11.73 | 1.340 | 34.04 |
| .015 | 0.38 | .112 | 2.84 | .210 | 5.33 | .488 | 12.40 | 1.390 | 35.31 |
| .020 | 0.51 | .120 | 3.05 | .220 | 5.59 | .600 | 15.24 | | |
| .025 | 0.64 | .136 | 3.45 | .281 | 7.14 | .603 | 15.32 | | |

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
3. Metric equivalents are given for general information only.
4. Terminal indicated shall be identified by a contrasting bead. Relays shall have plus (+) and minus (-) signs placed on the circuit diagram as shown above.
5. Energizing the indicated coil with the indicated polarity and voltage shall cause the relay contacts to assume the position shown.
6. When relay enclosure has side mounting hardware, the contrasting header bead shall be located on the same side as the mounting hardware (bracket mount and stud mount).
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Terminal numbers in circuit diagram are for reference only. Numbers do not appear on relay.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Contact data:

Arrangement: 2 form C.

Load ratings (relay case grounded):

High level:

Resistive: 2.0 amperes at 28 V dc; 0.15 ampere at 115 V ac, (60 Hz and 400 Hz).

Inductive: 0.8 ampere at 28 V dc (200 mH); 0.1 ampere at 115 V, 60 Hz and 400 Hz.

Lamp: 0.1 ampere at 28 V dc. 1/

Low level: 10 μA to 50 μA at 10 mV to 50 mV dc or peak ac.

Intermediate current: 50,000 cycles.

Contact resistance or voltage drop:

Initial: 0.050 ohm maximum.

High level:

During life: Maximum of 10 percent of open circuit voltage.

After life: 0.100 ohm maximum.

Low level:

During life: 50 ohms maximum.

After life: .150 ohm maximum.

Intermediate current:

During intermediate current: 1 ohm maximum.

After intermediate current: 0.300 ohm maximum.

Contact bounce: 1.5 ms maximum.

Contact stabilization time: 2.5 ms maximum.

1/ Contact resistance 3 ohms during and after life.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Overload (high level only):

Resistive: Two times rated current.

Inductive: Two times rated current.

Neutral screen: Applicable.

Coil data: (See table I.)

Duty rating: Continuous (one coil at a time).

Operate time (each coil): 5 ms maximum over temperature range.

Release time: Not applicable.

Electrical data:

Insulation resistance: 1,000 megohms minimum, except the resistance between coil and case at high temperature shall be 500 megohms or greater.

Dielectric withstanding voltage:

Sea level:

| | |
|---|---|
| Between case, frame, or enclosure, and all contacts | 1,000 V rms (60 Hz) |
| Between case, frame, or enclosure, and coil(s) | 500 V rms (60 Hz) |
| Between all contacts and coils | 1,000 V rms (60 Hz) |
| Between open contacts in the latch and reset positions | 500 V rms (60 Hz) |
| Between coils | 1,000 V rms (60 Hz) |
| Between contact poles | 1,000 V rms (60 Hz) |

Altitude:

| | |
|---|---|
| Between all terminals to case | 350 V rm (60 Hz) |

Environmental data:

Temperature range: -65°C to +125°C.

Magnetic interference: Not applicable.

Vibration (sinusoidal): Method 204, MIL-STD-202. Contact chatter shall not exceed 10 μs maximum for closed contacts, and 1 μs maximum closure for open contacts.

Vibration (random): Method 214, MIL-STD-202, test condition IG. Contact chatter shall not exceed 10 μs maximum for closed contacts, and 1 μs maximum closure for open contacts.

Shock (specified pulse): Method 213, MIL-STD-202, test condition C (100 g's). Contact chatter shall not exceed 10 μs maximum for closed contacts, and 1 μs maximum closure for open contacts.

Coil life: Not applicable.

Resistance to soldering heat: Applicable.

Acceleration: Applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Physical data:

Seal: Hermetic.

Terminals: See figure 1 and table I.

Terminal strength: 3 pounds ± 0.3 pound (pull).

Solderability: Applicable.

Terminal twist test: Applicable to wire leads.

Dimensions and configurations: See figure 1 and table I.

Weight: 1 ounce maximum.

Life test requirements:

High level: 100,000 cycles.

Low level: 100,000 cycles.

Part or Identifying Number (PIN): M39016/32- (dash number from table I).

TABLE I. Dash numbers and characteristics. 1/

| Dash number | | | Mount | Coil voltage (V dc) 2/ | | At +25°C | | Over temperature range |
|---|---|---|---|---|---|---|---|---|
| Solder lug | Wire lead (SP) | Wire lead 3/ | | Rated | Max | Coil resistance ohms ±10% | Specified pickup (latch/reset) value (voltage) (V dc) 4/ | Specified pickup (latch/reset) value (voltage) (V dc) 4/ |
| 001<br>002<br>003<br>005 | ---<br>---<br>004<br>006 | ---<br>019<br>---<br>022 | Stud<br>Bracket<br>Flange<br>No mount | 26.5 | 32 | 975 | 12 | 18 |
| 007<br>008<br>009<br>011 | ---<br>---<br>010<br>012 | ---<br>020<br>---<br>--- | Stud<br>Bracket<br>Flange<br>No mount | 12 | 16 | 300 | 5.8 | 8.5 |
| 013<br>014<br>015<br>017 | ---<br>---<br>016<br>018 | ---<br>021<br>---<br>--- | Stud<br>Bracket<br>Flange<br>No mount | 6 | 8 | 82 | 3.0 | 4.2 |

1/ Relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuit shall not be used for low level applications.
2/ CAUTION: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
3/ CAUTION: When mounting relays with 3-inch wire leads, do not bend the leads within .20 inch of the relay header.
4/ Allow 20 percent increase in maximum operate values during and after rated life.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Qualification inspection:

Qualification inspection and sample size: See table II.

TABLE II. Qualification inspection and sample size. 1/

| Single submission | Group submission | |
|---|---|---|
| 50 units plus 1 open unit.<br>One failure allowed. | M39016/32-003 | 50 units plus 1 open unit.<br>One failure allowed. |
| Qualification inspection as applicable. | | Qualification inspection as applicable. |
| | M39016/32-016 | Two units, qualification, Q1, also shock, vibration, acceleration, terminal strength and seal. |
| | M39016/32-020 | One unit terminal strength and solderability |

1/ The number of units required for qualification testing will be increased as required in Q5, MIL-PRF-39016, if the relay manufacturer elects to test the number of units permitting one or more failures. Prior to performance of qualification inspection testing, the relay manufacturer shall preselect the sampling plan.

Supersession data: See table III.

TABLE III. Supersession data.

| Superseded PIN<br>M5757/21- | New PIN<br>M39016/32- |
|---|---|
| 001 | 001 |
| 002 | No replacement |
| 003 | 002 |
| 004 | 019 |
| 005 | 003 |
| 006 | 004 |
| 007 | 001 |
| 008 | No replacement |
| 009 | 002 |
| 010 | 019 |
| 011 | 003 |
| 012 | 004 |

Quality assurance provisions:

Group B and group C not required. Group A required. The qualifying activity shall be notified of any design and/or construction changes and shall impose additional testing requirements as necessary.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-PRF-39016, this document references the following:

MIL-STD-202
MIL-STD-1285

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA.-.CC

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5945-1288-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.