INCH-POUND

MIL-PRF-39016/32G
14 December 2021
SUPERSEEDING
MIL-R-39016/32F
31 July 2006

PERFORMANCE SPECIFICATION

RELAYS, ELECTROMAGNETIC, DPDT, LOW LEVEL TO 2 AMPERES (LATCHING)

Reactivated after 14 December 2021 and may be used for new and existing design acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39016.

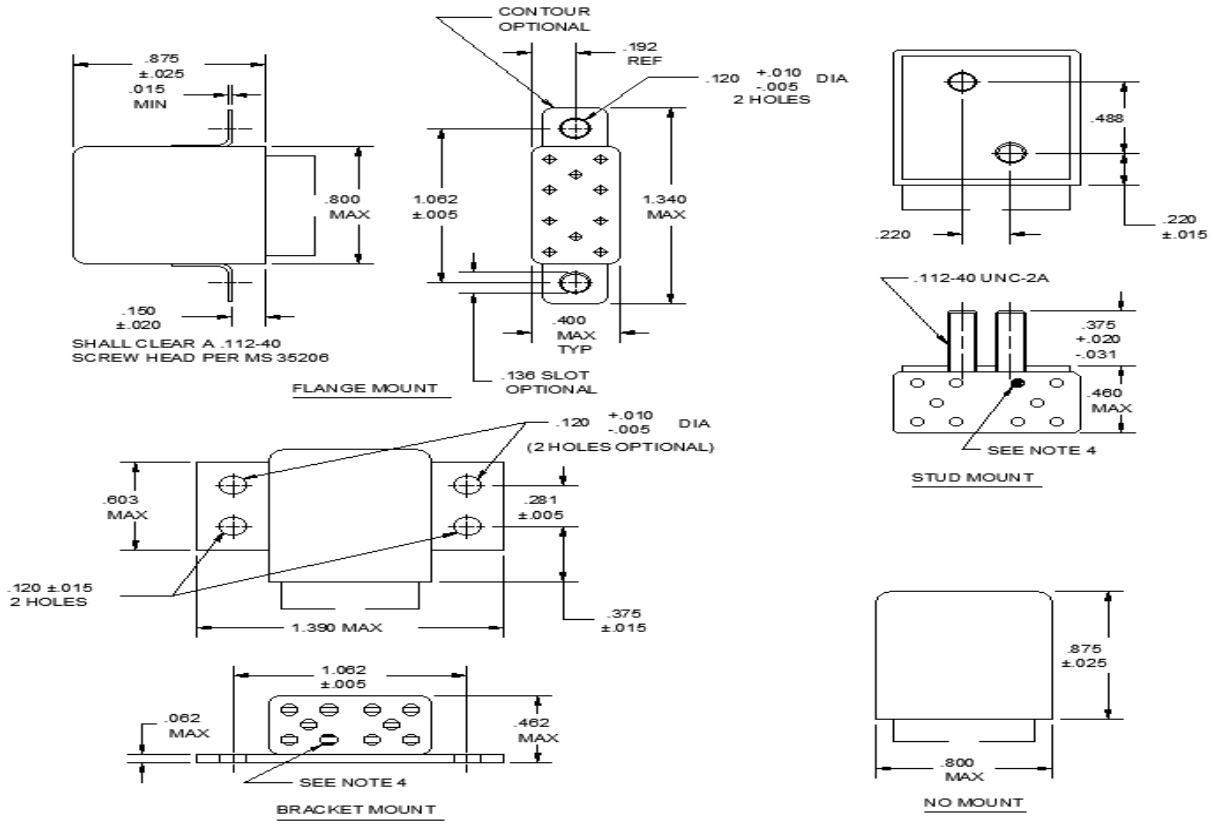



FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

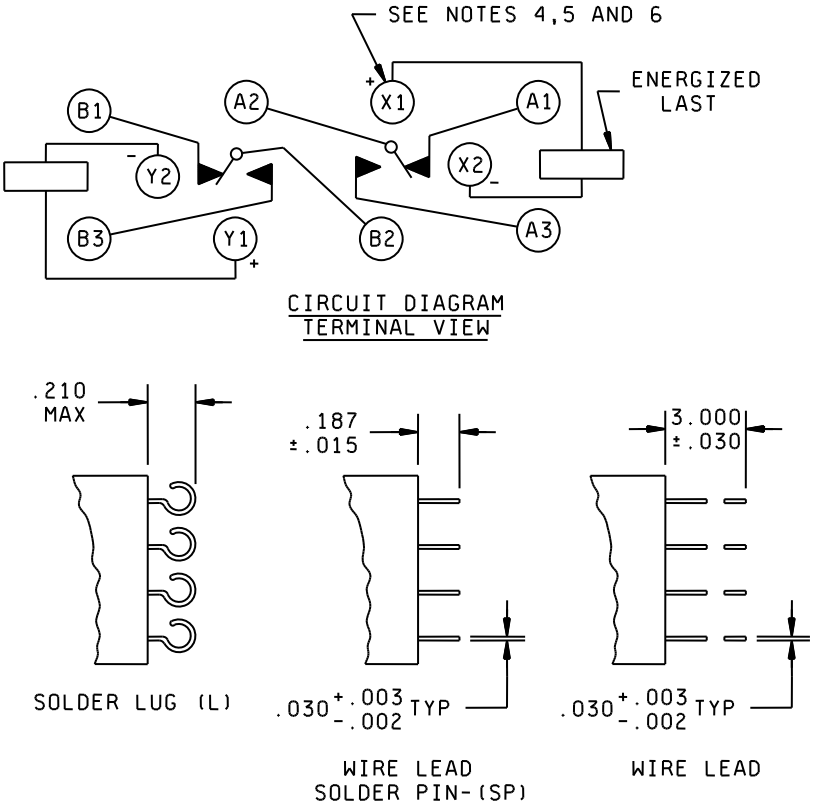

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.030	0.76	.150	3.81	.375	9.52	.603	15.32
.003	0.08	.031	0.79	.187	4.75	.400	10.16	.800	20.32
.005	0.13	.062	1.57	.192	4.88	.460	11.68	.875	22.22
.010	0.25	.100	2.54	.200	5.08	.462	11.73	1.062	26.97
.015	0.38	.112	2.84	.210	5.33	.488	12.40	1.340	34.04
.020	0.51	.120	3.05	.220	5.59	.600	15.24	1.390	35.31
.025	0.64	.136	3.45	.281	7.14				

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
3. Metric equivalents are given for general information only.
4. Terminal indicated shall be identified by a contrasting bead. Relays shall have plus (+) and minus (-) signs placed on the circuit diagram as shown above.
5. Energizing the indicated coil with the indicated polarity and voltage shall cause the relay contacts to assume the position shown.
6. When relay enclosure has side mounting hardware, the contrasting header bead shall be located on the same side as the mounting hardware (bracket mount and stud mount).
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Terminal numbers in circuit diagram are for reference only. Numbers do not appear on relay.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Contact data:

Arrangement: 2 form C.

Load ratings (relay case grounded):

High level:

Resistive: 2.0 amperes at 28 V dc; 0.15 ampere at 115 V ac, (60 Hz and 400 Hz).

Inductive: 0.8 ampere at 28 V dc (200 mH); 0.1 ampere at 115 V, 60 Hz and 400 Hz.

Lamp: 0.1 ampere at 28 V dc. 1/

Low level: 10 µA to 50 µA at 10 mV to 50 mV dc or peak ac.

Intermediate current: 50,000 cycles.

Contact resistance or voltage drop:

Initial: 0.050 ohm maximum.

High level:

During life: Maximum of 10 percent of open circuit voltage.

After life: 0.100 ohm maximum.

Low level:

During life: 50 ohms maximum.

After life: .150 ohm maximum.

Intermediate current:

During intermediate current: 1 ohm maximum.

After intermediate current: 0.300 ohm maximum.

Contact bounce: 1.5 ms maximum.

Contact stabilization time: 2.5 ms maximum.

1/Contact resistance 3 ohms during and after life.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Overload (high level only):

Resistive: Two times rated current.

Inductive: Two times rated current.

Neutral screen: Applicable.

Coil data: (See table I)

Duty rating: Continuous (one coil at a time).

Operate time (each coil): 5 ms maximum over temperature range.

Release time: Not applicable.

Electrical data:

Insulation resistance: 1,000 megohms minimum, except the resistance between coil and case at high temperature shall be 500 megohms or greater.

Dielectric withstanding voltage:

Sea level:

Between case, frame or enclosure, and all contacts	1,000 V rms (60 Hz).
Between case, frame or enclosure, and coil(s)	500 V rms (60 Hz).
Between all contacts and coils	1,000 V rms (60 Hz).
Between open contacts in the latch and reset positions	500 V rms (60 Hz).
Between coils	1,000 V rms (60 Hz).
Between contact poles	1,000 V rms (60 Hz).

Altitude:

Between all terminals to case	350 V rms (60 Hz).

Environmental data:

Temperature range: -65°C to +125°C.

Magnetic interference: Not applicable.

Vibration (sinusoidal): MIL-STD-202-204. Contact chatter shall not exceed 10 µs maximum for closed contacts and 1 µs maximum closure for open contacts

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Vibration (random): MIL-STD-202-214, test condition IG. Contact chatter shall not exceed 10 µs maximum for closed contacts and 1 µs maximum closure for open contacts.

Shock (specified pulse): MIL-STD-202-213, test condition C (100 g's). Contact chatter shall not exceed 10 µs maximum for closed contacts and 1 µs maximum closure for open contacts.

Coil life: Not applicable.

Resistance to soldering heat: Applicable.

Acceleration: Applicable.

Physical data:

Seal: Hermetic.

Terminals: See figure 1 and table I.

Terminal strength: 3 pounds ±0.3 pound (pull).

Solderability: Applicable.

Terminal twist test: Applicable to wire leads.

Dimensions and configurations: See figure 1 and table I.

Weight: 1 ounce maximum.

Life test requirements:

High level: 100,000 cycles.

Low level: 100,000 cycles.

Part or Identifying Number (PIN): M39016/32- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. 1/

Dash number			Mount	Coil voltage (V dc) 2/		At +25°C		Over temperature range
Solder lug	Wire lead (SP)	Wire lead 3/		Rated	Max	Coil resistance ohms ±10%	Specified pickup (latch/reset) value (voltage) (V dc) 4/	Specified pickup (latch/reset) value (voltage) (V dc) 4/
001 002 003 005	 004 006	 019 022	Stud Bracket Flange No mount	26.5	32	975	12	18
007 008 009 011	 010 012	 020 	Stud Bracket Flange No mount	12	16	300	5.8	8.5
013 014 015 017	 016 018	 021 	Stud Bracket Flange No mount	6	8	82	3.0	4.2

1/ Relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuit shall not be used for low level applications.
2/ CAUTION: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
3/ CAUTION: When mounting relays with 3-inch wire leads, do not bend the leads within 0.20 inch of the relay header.
4/ Allow 20 percent increase in maximum operate values during and after rated life.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Qualification inspection:

Qualification inspection and sample size: See table II.

TABLE II. Qualification inspection and sample size. 1/

Single submission	Group submission	
50 units plus 1 open unit. One failure allowed.	M39016/32-003	50 units plus 1 open unit. One failure allowed.
Qualification inspection as applicable.		Qualification inspection as applicable.
	M39016/32-016	Two units, qualification, group II, also shock, vibration, acceleration, terminal strength and seal.
	M39016/32-020	One unit terminal strength and solderability.

1/ The number of units required for qualification testing will be increased as required in Q5, MIL-PRF-39016, if the relay manufacturer elects to test the number of units permitting one or more failures. Prior to performance of qualification inspection testing, the relay manufacturer shall preselect the sampling plan.

Supersession data: See table III.

TABLE III. Supersession data.

Superseded PIN M5757/21-	New PIN M39016/32-
001	001
002	No replacement
003	002
004	019
005	003
006	004
007	001
008	No replacement
009	002
010	019
011	003
012	004

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.

Quality assurance provisions:

Groups B and C not required. Group A required. The qualifying activity shall be notified of any design and/or construction changes and shall impose additional testing requirements as necessary.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents: In addition to MIL-PRF-39016, this document references the following:

MIL-STD-202-204 MIL-STD-202-214 MIL-STD-202-213 MIL-STD-1285

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5945-2022-002)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:45Z
Check the source to verify that this is the current version before use.