INCH-POUND


MIL-DTL-7560/1A
22 January 1999
SUPERSEDING
MIL-DTL-7560/1
20 June 1997


DETAIL SPECIFICATION SHEET

VALVE ASSEMBLY, OXYGEN CYLINDER, BAILOUT

This document remains Inactive For New Design.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

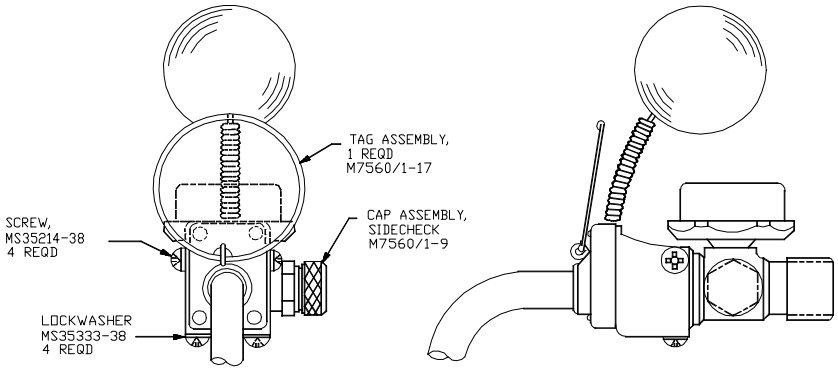

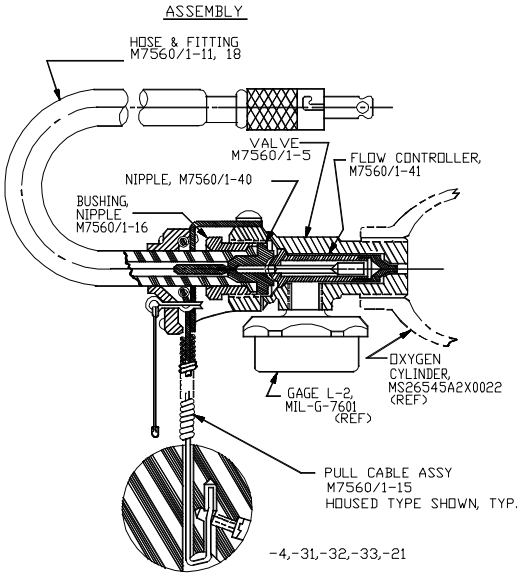

SECTIONAL VIEW REVOLVED 180°
VALVE AND HOSE ASSEMBLY, M7560/1-33 SHOWN

NOTE: REFER TO T.O. 15X1-4-2-12 FOR ASSEMBLY INSTRUCTIONS.

FINISH: IN ACCORDANCE WITH B46-1-78. ROUGHNESS OF 125 MICROINCH UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. TOLERANCES AS SPECIFIED ON DWG. DETAILS.

MATERIAL: MATERIALS NOT SPECIFIED SHALL BE IN ACCORDANCE WITH MIL-DTL-7560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

The Part or Identifying Number (PIN) shall be as follows: M7560/1-(see tables below for dash number)


TABLE I. Valve assemblies

Dash number	Assemblies	Pull cable dash number	Hose dash number	Sheet reference
4	Valve, hose & pull cable assy	14	11	
31	Valve, hose & pull cable assy	14	18	
32	Valve, hose & pull cable assy	13	18	
33	Valve, hose & pull cable assy	15	18	
21	Valve and hose	None	19	10


TABLE II. Valve components

Dash number	Component	Superseded R/N	Sheet reference
6	Spring, side check	44A25094	4
7	Retainer assy, side check	51A24468	4
8	Bushing assy, side check	53A3730	4
9	Cap & seal assy, side check	53A3516	5
10	Gasket, bushing, side check	44A25100	5
	Other components		
11	Hose & fitting assy (24 in)	53A3731-1	6
18	Hose & fitting assy (28 in)	MS21964-12	6
19	Hose (28 in)		10
13	Pull cable assy, open type (6 in)	51B3589-1	7
14	Pull cable assy, open type (16.25 in)	51B3589-2	7
15	Pull cable assy, housed type (27.31 in)	57B3805	7
16	Bushing nipple	43A25028	8
17	Tag assy	43A25034	8
20	Fitting assy	7125414	11
40	Nipple, break-off	MS21965-1	12
41	Flow controller	MS29597-1	13
5	Valve		3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

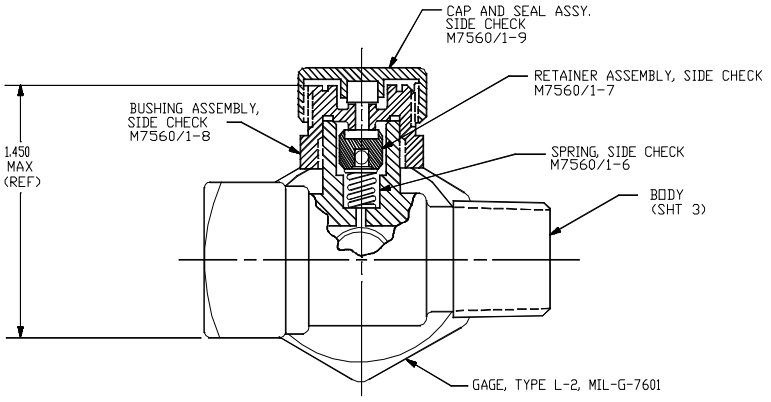

VALVE ASSEMBLY

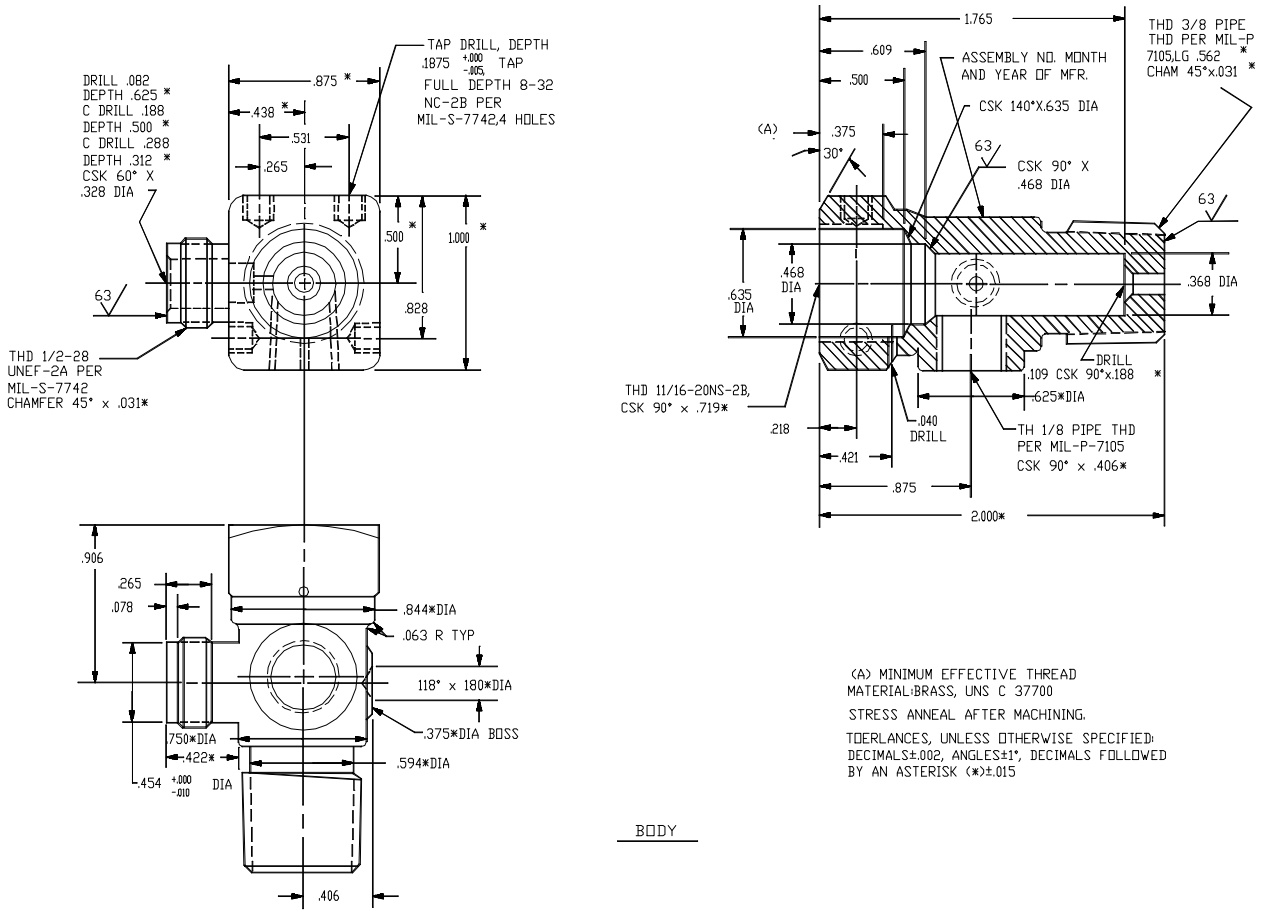

(A) MINIMUM EFFECTIVE THREAD


MATERIAL:BRASS, UNS C 37700

STRESS ANNEAL AFTER MACHINING.

TOLERANCES, UNLESS OTHERWISE SPECIFIED:
DECIMALS±.002, ANGLES±1°, DECIMALS FOLLOWED
BY AN ASTERISK (*)±.015


BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

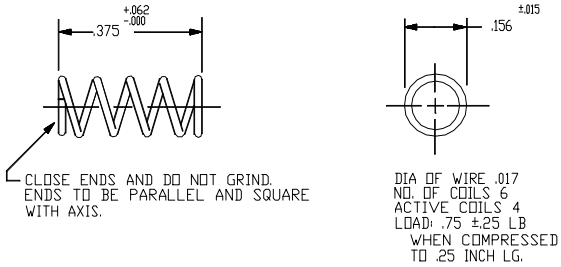


MATERIAL: PHOSPHORBRONZE, UNS C51000

SPRING, SIDE CHECK M7560/1-6

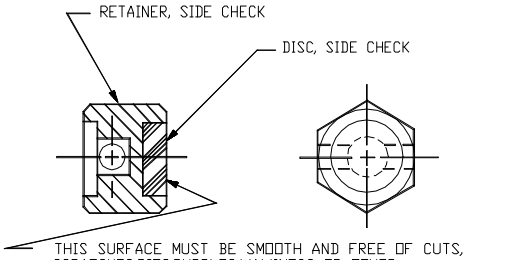


PART MUST BE CLEAN,DRY, AND FREE OF OIL,GREASE,
AND ALL OTHER FOREIGN MATTER.

RETAINER ASSEMBLY, SIDE CHECK M7560/1-7

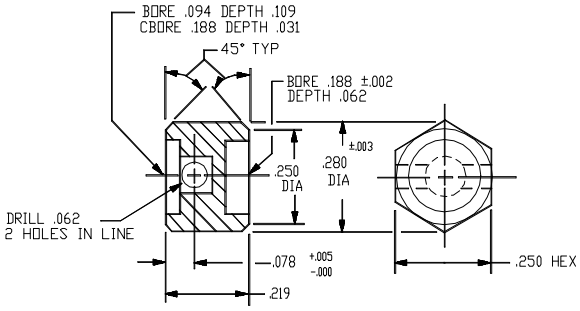


MATERIAL: BRASS, USN C36000
REMOVE BURRS AND BREAK SHARP EDGES .005 MAX.
UNLESS OTHERWISE SPECIFIED, TOLERANCES:
DECIMALS: ±.005, ANGLES: ±1°

RETAINER, SIDE CHECK

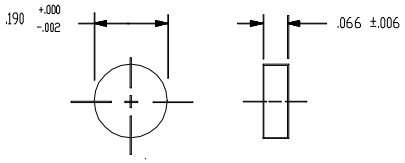


MATERIAL: SILICON RUBBER, ZZ-R-765E/GEN
CLASS OPTIONAL, GRADE 80

DISC, SIDE CHECK

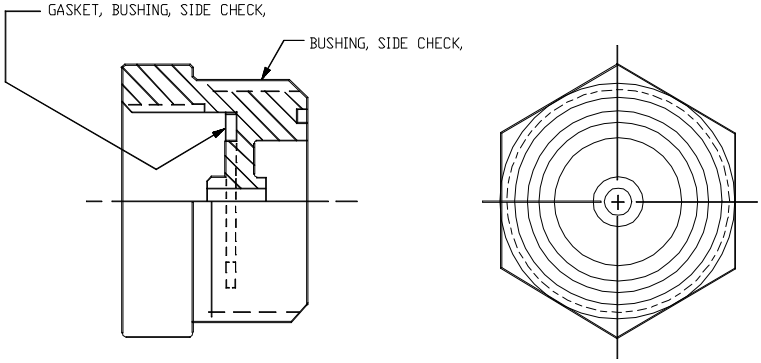

BUSHING ASSEMBLY, SIDE CHECK M7560/1-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

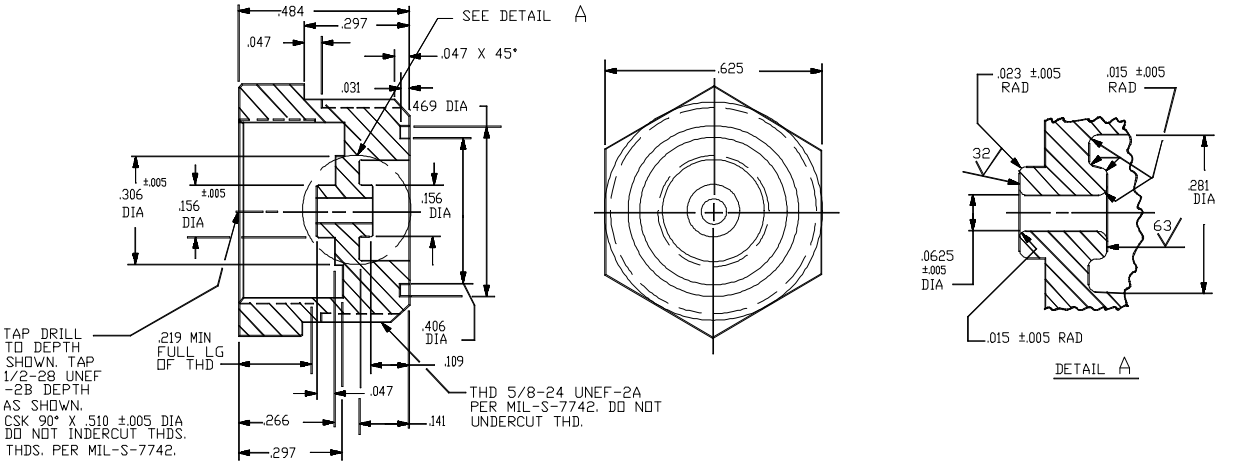

MATERIAL: BRASS ROD, UNS C48200 OR C36000 H02 TEMP, 1/2 HARD


REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
UNLESS SPECIFIED, TOLERANCES:
DECIMALS: ±.016, ANGLES: ±1°.

BUSHING, SIDE CHECK

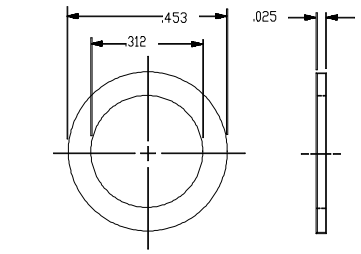


MATERIAL: COPPER, ASTM B152 SOFT SHEET STOCK.
REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.
TOLERANCES ±.005

GASKET, BUSHING, SIDE CHECK M7560/1-10



MATERIAL:
POLYTRIFLOUROCHLOROETHYLENE
(UNPLASTICIZED) AMS3646 OR AMS3650
DIMENSIONS ARE IN INCHES.


SEAL, SIDE CHECK

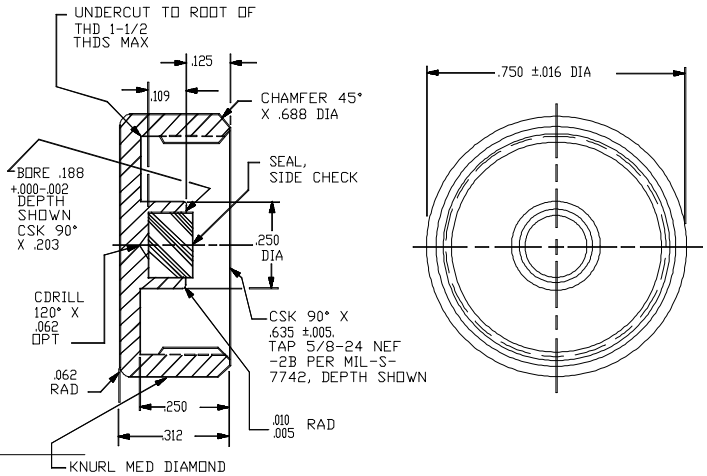

MATERIAL: BRASS, UNS C36000
REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.
UNLESS SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°


CAP AND SEAL ASSEMBLY, SIDE CHECK M7560/1-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

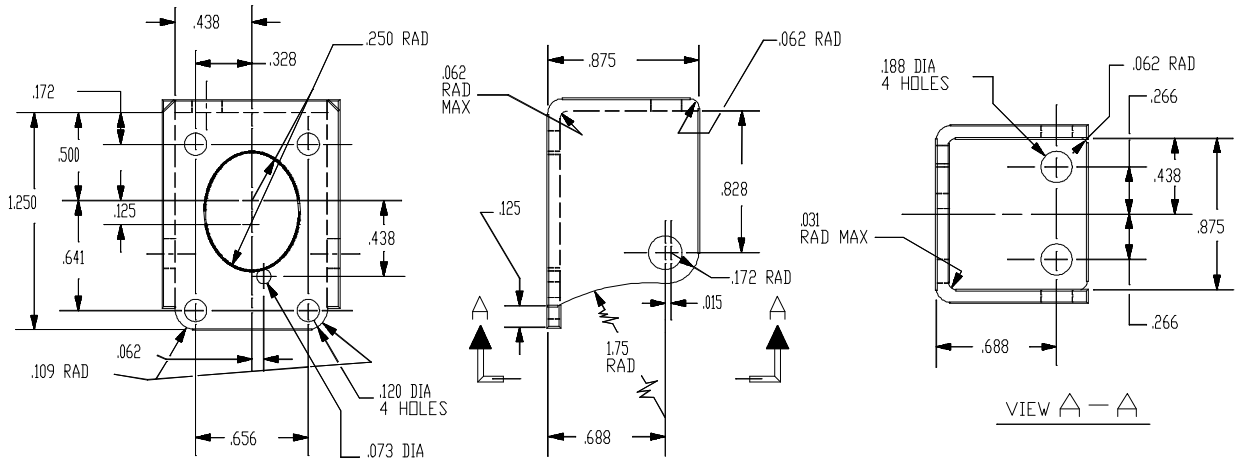

MATERIAL: STEEL, UNS K02500 .050 THICK
FINISH: ZINC PLATE, ASTM B633, SC 2 OPT FINISH; MIL-C-83488, TYPE I, CLASS 3
BREAK SHARP EDGES .010 MAX.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS, ± .005, ANGLES ±1°.


HOUSING-SHEETMETAL

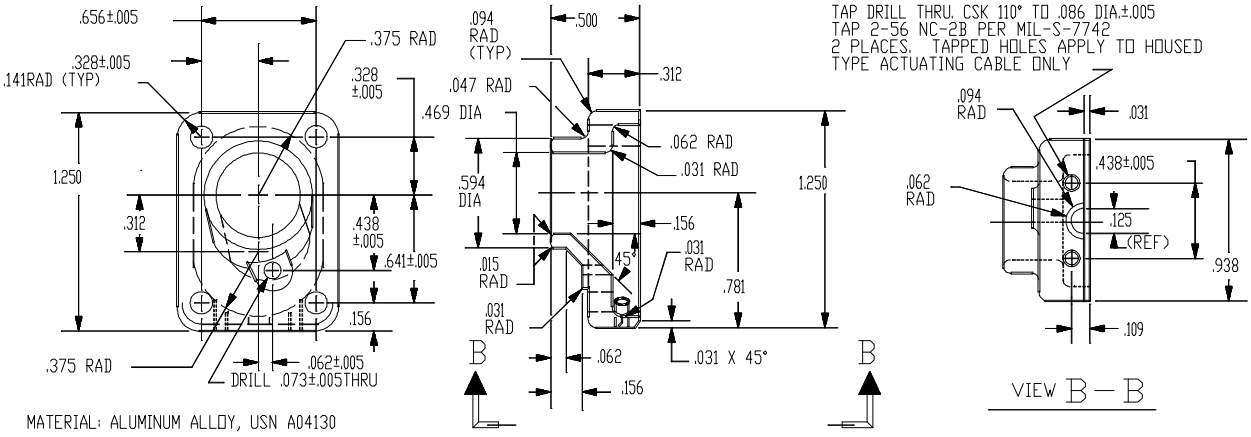

MATERIAL: ALUMINUM ALLOY, USN A04130
FINISH: ANODIC, PER MIL-A-8625, TYPE II
FINISH ALL OVER 63
REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX.


HOUSING-CAST

UNLESS OTHERWISE SPECIFIED, TOLERANCES:
DECIMALS ±.015, ANGLES ±1°.

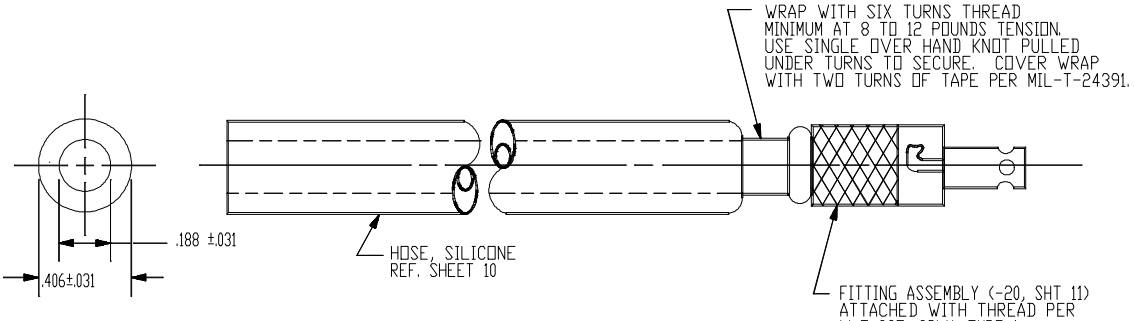


HOSE AND FITTING
M7560/1-11, 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

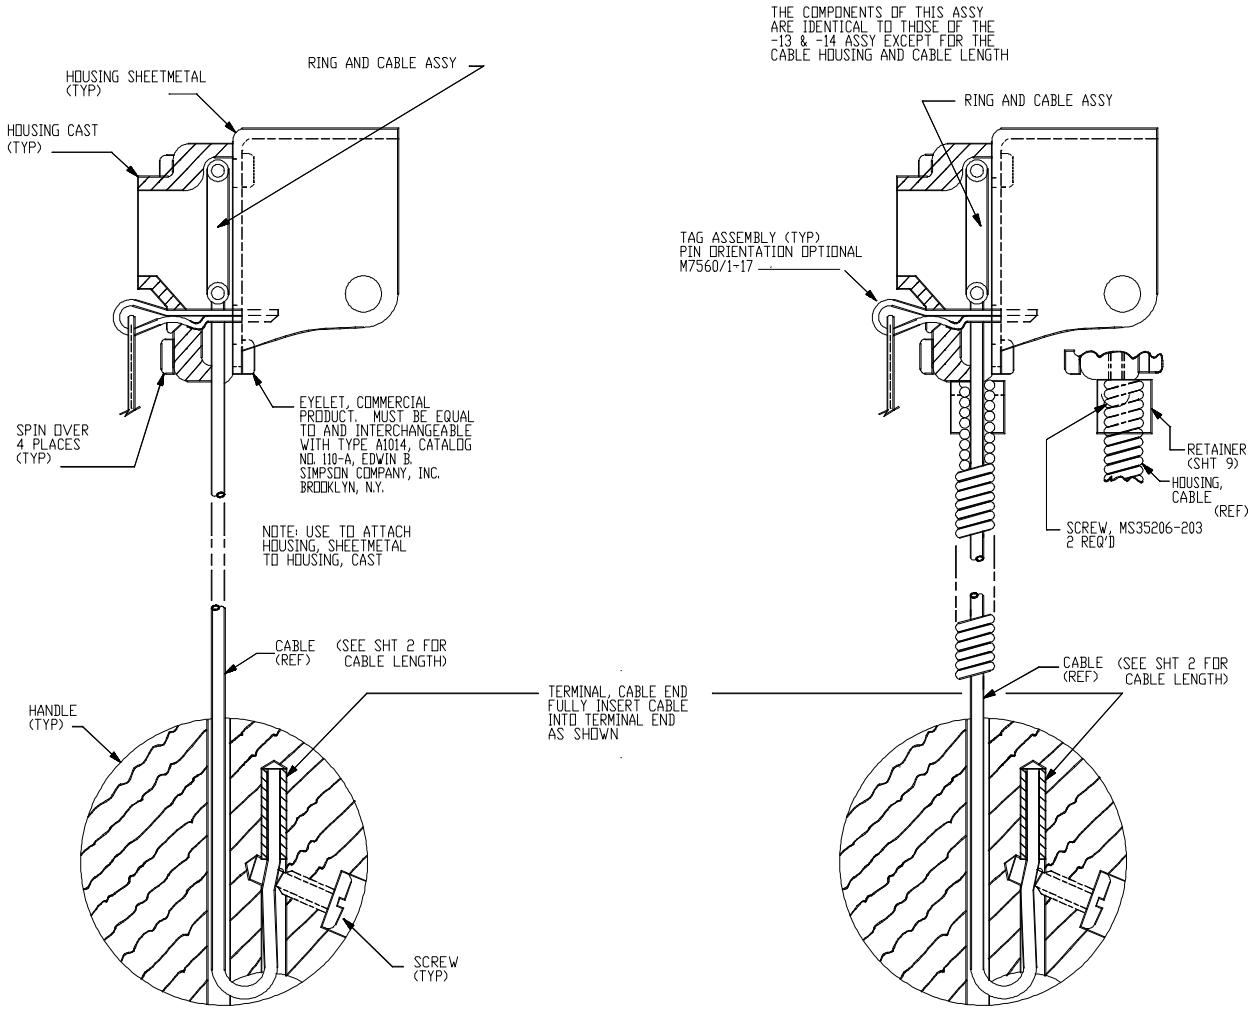

PULL CABLE, ASSEMBLY
OPEN TYPE M7560/1-13, 14


PULL CABLE, ASSEMBLY
HOUSED TYPE M7560/1-15

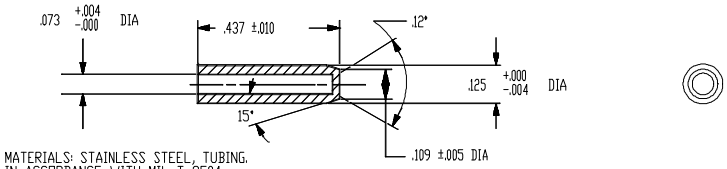

MATERIALS: STAINLESS STEEL, TUBING.
IN ACCORDANCE WITH MIL-T-8504.
REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX. RAD.
TOLERANCE FOR ANGLES ±5°


TERMINAL, CABLE END

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

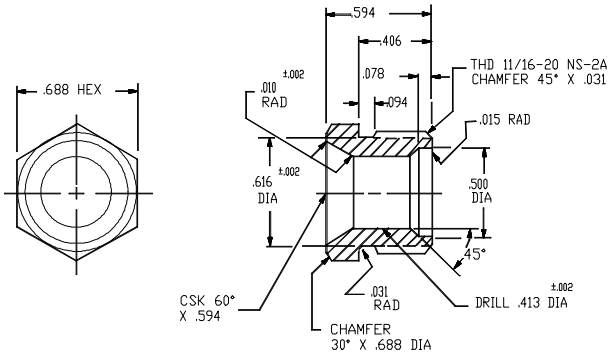


MATERIAL: BRASS, UNS C36000
REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.
UNLESS SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°

BUSHING, NIPPLE M7560/1-16

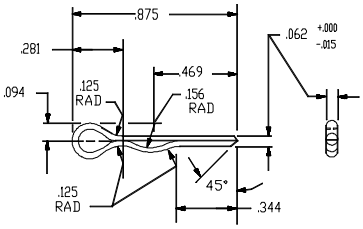


MATERIAL: WIRE, STEEL ALLOY, UNS K15048
OPTIONAL MATERIAL: COMMERCIAL STD OR EQUAL, UNS G31400, SPRING TEMPERED.
FINISH: MIL-C-83488, TYPE I OR II
OPTIONAL FINISH: ZINC PLATE, ASTM B633 - TYPE I, SERVICE CONDITION SC3
UNLESS OTHERWISE SPECIFIED
TOLERANCES: DECIMALS ±.015, ANGLES -5°

RETAINING PIN, CAUTION TAG

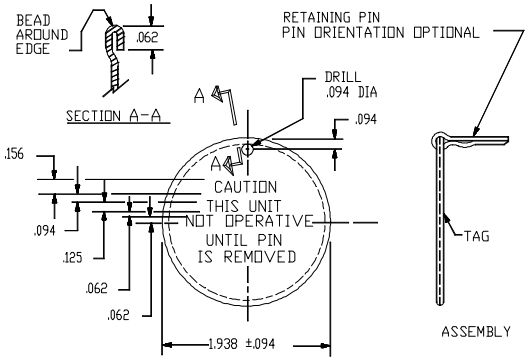


MATERIAL: STEEL, MIL-S-7952, COMPOSITION OPTIONAL, THICKNESS .015.
ALTERNATE MATERIAL: ALUM UNS A95052; THICKNESS .031 MIN
FINISH: RED PAINT BOTH SIDES. LETTERS, YELLOW PAINT ONE SIDE ONLY. PER TT-E-489, TYPE I. ALTERNATE FINISH: RED ANODIZE PER MIL-A-8625
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031

TAG ASSEMBLY

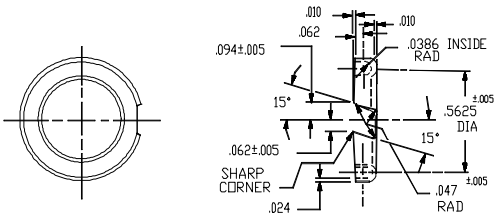

MATERIAL: STAINLESS STEEL, UNS S34700 OR S34800
REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
UNLESS OTHERWISE SPECIFIED, TOERLANCES: DECIMALS±.002, ANGLES ±1°


RING, VALVE PULL

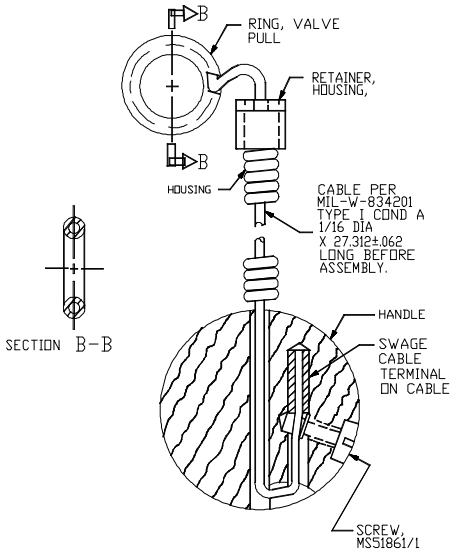


ASSEMBLY NOTE:
FULLY INSERT CABLE INTO RING FOR ENTIRE CIRCUMFERENCE.
SWAGE IN PLACE UNIFORMLY

RING AND CABLE ASSEMBLY
HOUSED CABLE TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

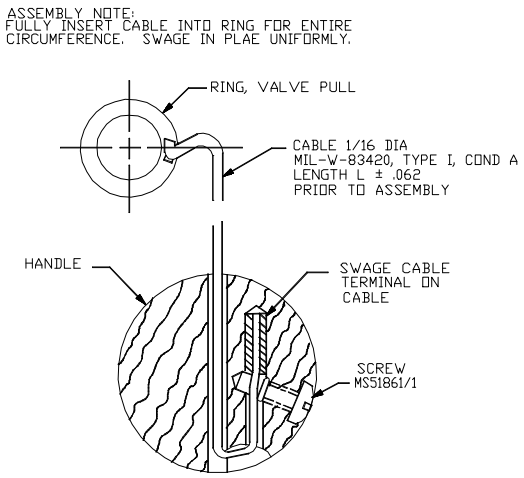


RING AND CABLE ASSEMBLY
OPEN CABLE TYPE

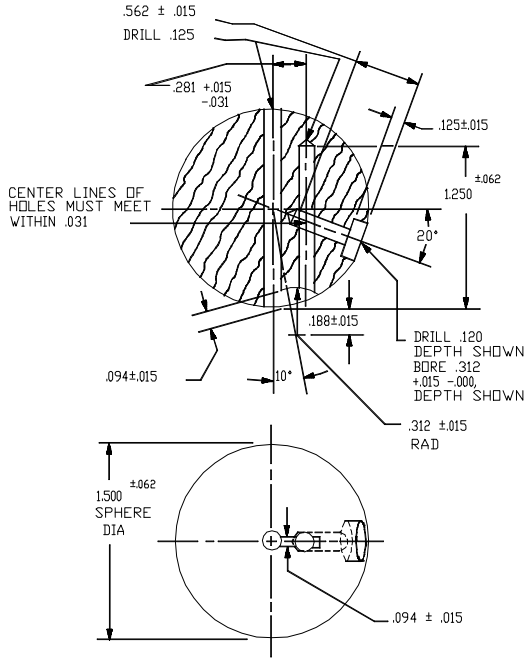


MATERIAL: BIRCH OR MAPLE PER MM-L-736.
FINISH: GREEN DYE OR LACQUER COMMERCIAL PRODUCT.


UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015, ANGLES:±1°.


HANDLE

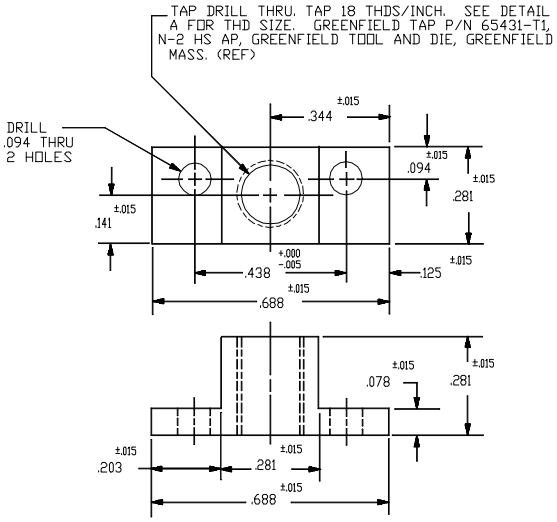

MATERIAL: RETAINER, ALUMINUM ALLOY, UNS A92024








TURN RETAINER ON CABLE PAST END ENOUGH TO EXPAND 2 OR 3 COILS SLIGHTLY, THEN TURN RETAINER BACK TO END OF CABLE.

THROTTLE CABLE HOUSING .187 ± .005 OD X .094 MIN. ID X 22 INCHES LONG. 18 RIGHT HAND COILS PER INCH MIN. CRES WIRE PER UNS S30200


RETAINER
(ASSEMBLY OF RETAINER AND HOUSING SHOWN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

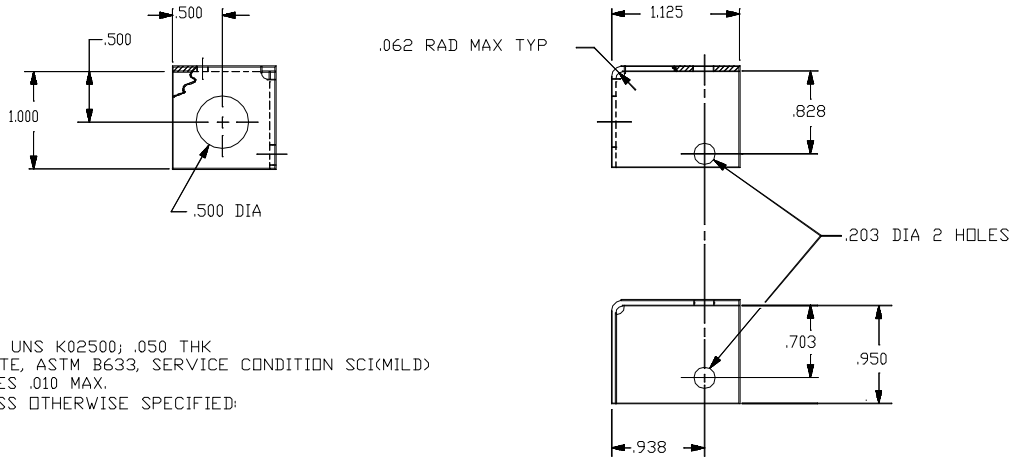


MATERIAL: STEEL, UNS K02500; .050 THK
FINISH: ZINC PLATE, ASTM B633, SERVICE CONDITION SC1(MILD)
BREAK SHARP EDGES .010 MAX.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
DECIMALS ±.015
ANGLES ±1°

SHIPPING GUARD

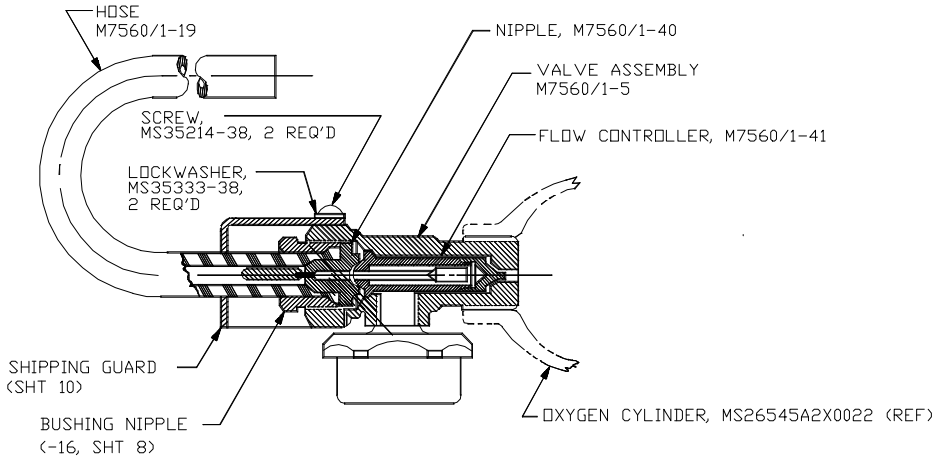


VALVE AND HOSE ASSEMBLY M7560/1-21

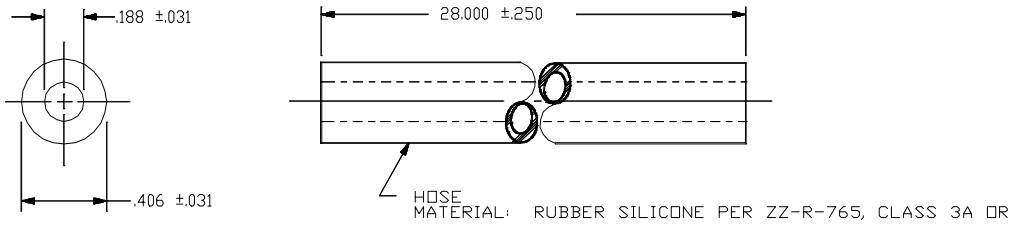

HOSE M7560/1-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

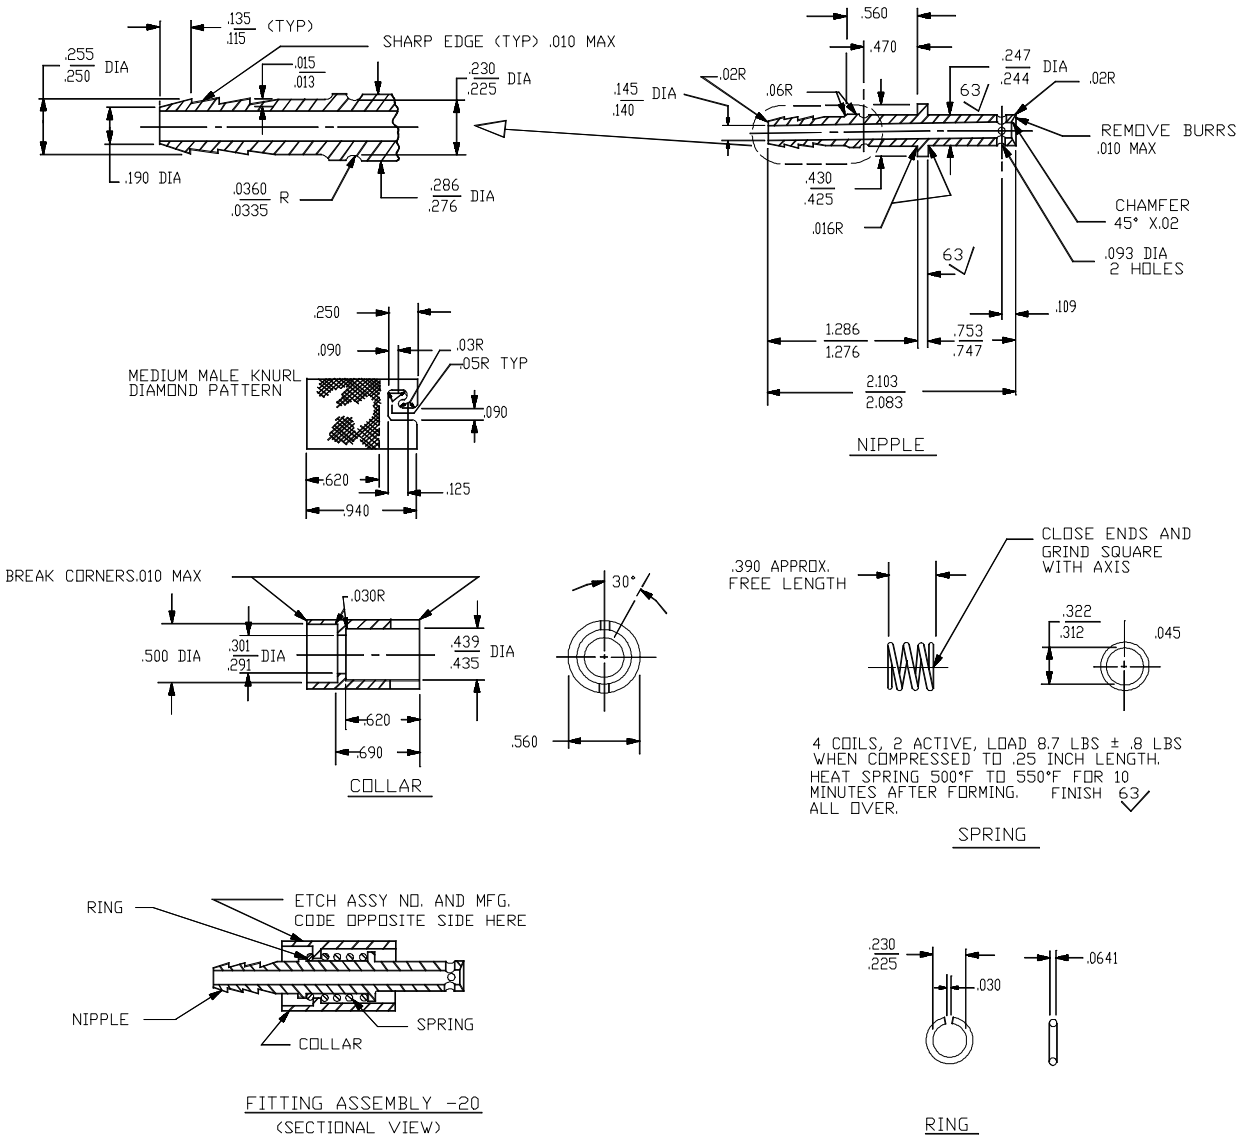

RING; BRASS, UNS C26800 OR UNS C26000

SPRING; STEEL, UNS K08500; FINISH ASTM B 633 TYPE 1, SC3 OR MIL-C-83488 TYPE 1 OR 2


NIPPLE AND COLLAR; BRASS, UNS C36000; FINISH ASTM B633 SC1


ASSEMBLY MUST BE CLEAN, FREE FROM OIL AND OTHER FOREIGN MATERIAL.

FINISH 125 ALL OVER IN ACCORDANCE WITH ANSI B46-1 UNLESS OTHERWISE SPECIFIED.

FITTING ASSEMBLY M7560/1-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

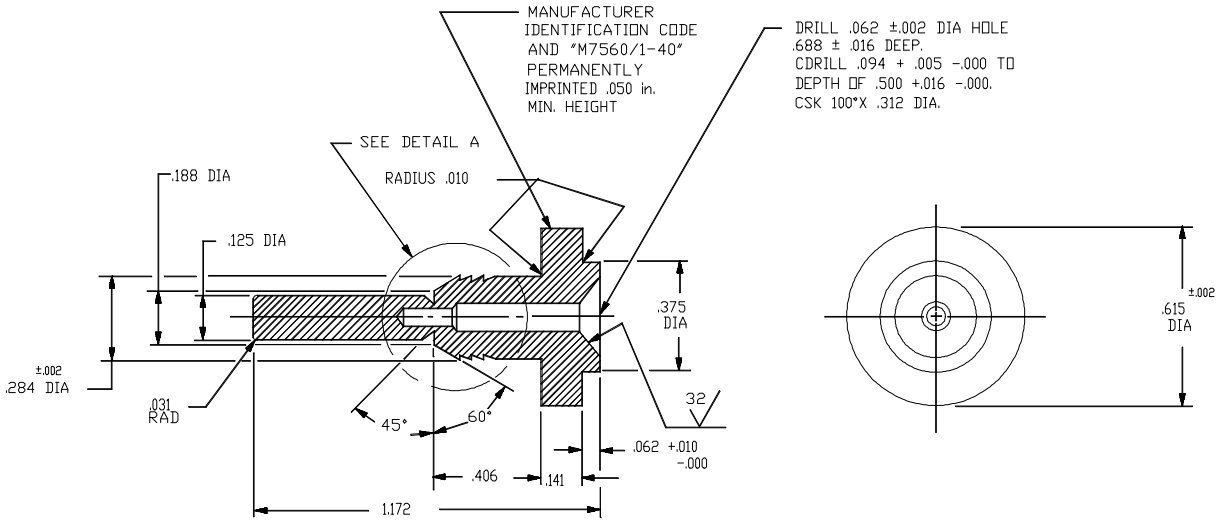

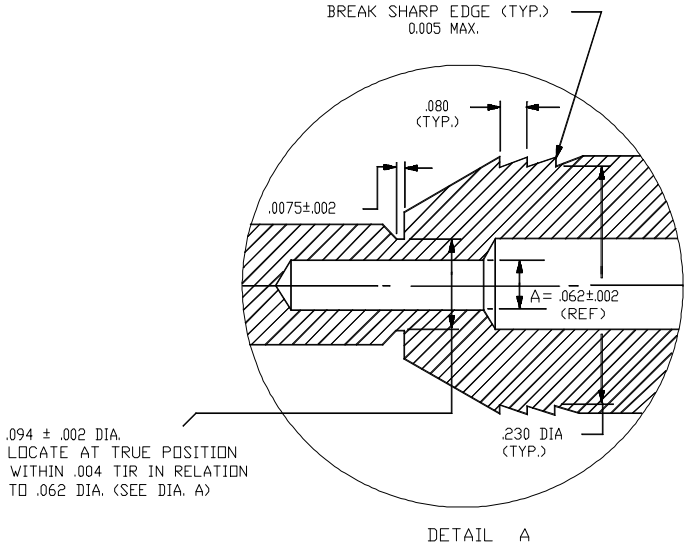

DETAIL A

MATERIAL: BRASS CONFORMING TO UNS C36000

FINISH: ALL EXTERIOR SURFACES TO 125 IN ACCORDANCE WITH ASTM B46 UNLESS OTHERWISE SPECIFIED


PART MUST BE STRESS ANNEALED WITHIN 25 HRS AFTER FIRST OPERATION TO MEET FRACTURE REQUIREMENTS

REMOVE ALL BURRS AND BREAK SHARP EDGES .005 MAX.

TOLERENCES IN INCHES. UNLESS OTHERWISE SPECIFIED. DECIMALS ±.005: ANGLES ±1°

NIPPLE, BREAK OFF M7560/1-40

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

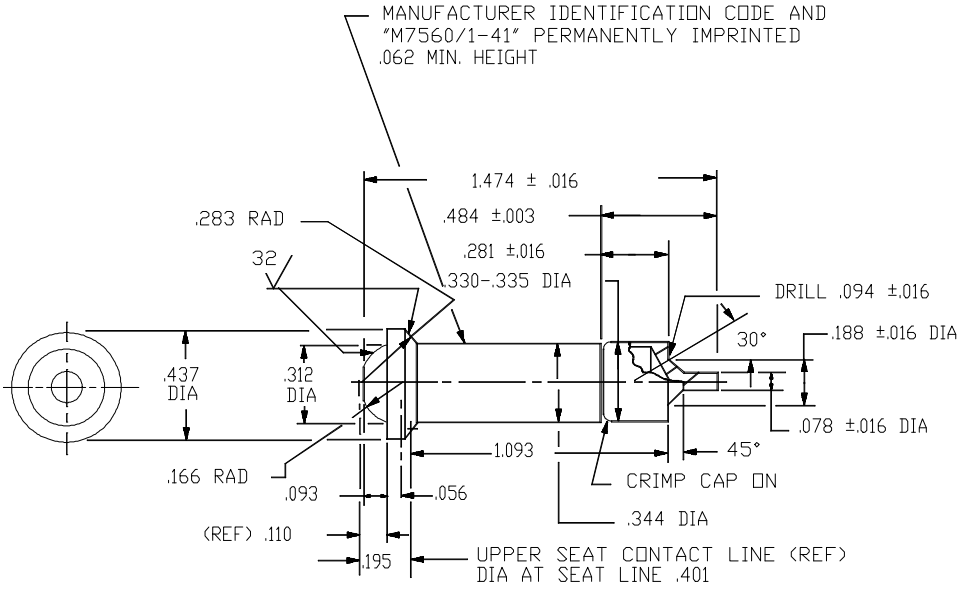

MATERIAL: BODY AND CAP, BRASS PER UNS C 36000

FINISH: IN CCORDANCE WITH ASME B.46.1 TO $\sqrt{63}$ MAXIMUM ROUGHNESS FOR ALL OUTR SURFACES UNLESS OTHERWISE SPECIFIED,

DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005

CONTROLLER, OXYGEN FLOW M7560/1-41

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - GS

Preparing activity:
Air Force - 71

Agent:
Air Force - 99

Project 1660-0808

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-DTL-7560/1a	**2. DOCUMENT DATE (YYMMDD)** 99/01/22

DOCUMENT TITLE VALVE ASSEMBLY, OXYGEN, BAILOUT

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME OC-ALC/TICLA	b. TELEPHONE *Include Area Code)* (1) Commercial (405) 736-5080 (2) AUTOVON 336-5080
c. ADDRESS *(Include Zip Code)Commander* 3001 STAFF DR STE 1AE1 101A TINKER AFB, OH 3145-5990	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:35Z
Check the source to verify that this is the current version before use.