INCH-POUND
MIL-T-7477D(USAF)
15 NOVEMBER 1994
SUPERSEDING
MIL-T-7477C(USAF)
31 DECEMBER 1957

MILITARY SPECIFICATION

TRANSMITTER, RATE OF FLOW, FUEL, SYNCHRO TYPE J-7, INDIVIDUAL AND TOTALING

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of fuel flow transmitter, self-synchronous rate of flow, and total flow, designated Type J-7.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

Federal

PPP-B-1672 Boxes, Shipping, Reusable With Cushioning

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Oklahoma City Air Logistics Center/TICLA, Tinker AFB OK 73145-5990 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6620

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation Methods Of
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-T-5350	Transmitters, Synchro, Aircraft, General Specification For
MIL-F-3624	Fuel, Aircraft Turbine And Jet Engine, Grades JP-3, JP-4, And JP-5
MIL-I-6599	Indicator, Rate Of Flow, Fuel, Type A-19
MIL-I-7491	Indicator, Rate Of Flow, Fuel, Totalizing, Servo Style, Type F-1

STANDARDS

Military

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-810	Environmental Test Methods
MIL-STD-2073-1	DOD Material Procedures For Development And Application Of Packaging Requirements
MS33678	Connector, Receptacle, Electrical, Integral Mounting

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Document Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article tests. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.2) in accordance with 4.4.

3.2 General specification. The requirements of MIL-T-5350 apply as requirements of this specification with the exceptions and additions called out herein. When the two specifications conflict, this specification shall govern.

3.3. DESIGN AND CONSTRUCTION

3.3.1 Calibration in pounds. The transmitter shall be calibrated in pounds per hour of aviation fuel in accordance with MIL-F-5624. The specific gravity of the fuel shall be 0.77 ±0.005 at 15.6°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

3.3.2 Measuring vane. The transmitter shall be of the variable area type in which the measuring vane moves in a spirally cut chamber against a hairspring to positions corresponding to certain flow rates. The measuring vane shall be connected through a frictionless seal, such as a magnetic coupling, to two electrical transmitting elements which shall transmit electrical signals which are functions of the rate of fuel flow.

3.3.3 Electrical signal. Each transmitter shall be so designed that its electrical signal for totalizing can be added to the electrical outputs of any number of other transmitters up to a maximum of eight per system.

3.3.4 Temperature range. The transmitter shall be designed to withstand an ambient-operating temperature range of -55° to 121°C with a fuel flowing through the transmitter, and exposure to 232°C for 10-minute cycles with no fuel flow.

3.3.5 Damping. The transmitter shall be provided with suitable damping.

3.3.6 Lock wire. The transmitter body screws shall be safetied with lock wire. Not more than three screws shall be safetied with one length of wire. The lock wire shall be twisted tight between each pair of screws. Instead of lock wire, where necessary, suitable lock washers may be used which shall stand the jars and vibrations incident to shipping, installation, and service, and not permit the screws to become loosened.

3.3.7 Mounting. Mounting bosses and spacing thereof shall be as specified on FIGURE 1.

3.3.8 Caps. The fuel-line connections shall be furnished with caps or plugs to prevent foreign material from entering the transmitter.

3.3.9 Electrical components. The transmitter shall be provided with two synchros and electrical components necessary for range adjustment.


3.3.9.1 Synchro generator. The synchro generator shall produce a signal to operate self-synchronously a fuel flow rate indicator in accordance with MIL-I-6599.

3.3.9.2 Linear synchro. The linear synchro shall produce a voltage which is a linear function of the fuel flow rate and shall operate a fuel flow total-rate indicator conforming to MIL-I-7491.

3.3.9.2.1 Design test voltage. The linear synchro shall be designed for the following electrical characteristics with an excitation voltage of 10V 400 Hz. The wave form of the supply voltage may be nonsinusoidal with a crest factor of 1.414 ±5 percent and with harmonics whose respective amplitude are less than 5 percent of the fundamental.

3.3.9.2.2 Excitation current. The current drawn by one linear synchro with secondaries open circuited and the red and black leads energized shall be less than 80 ma (milliamperes).

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:32Z
Check the source to verify that this is the current version before use.

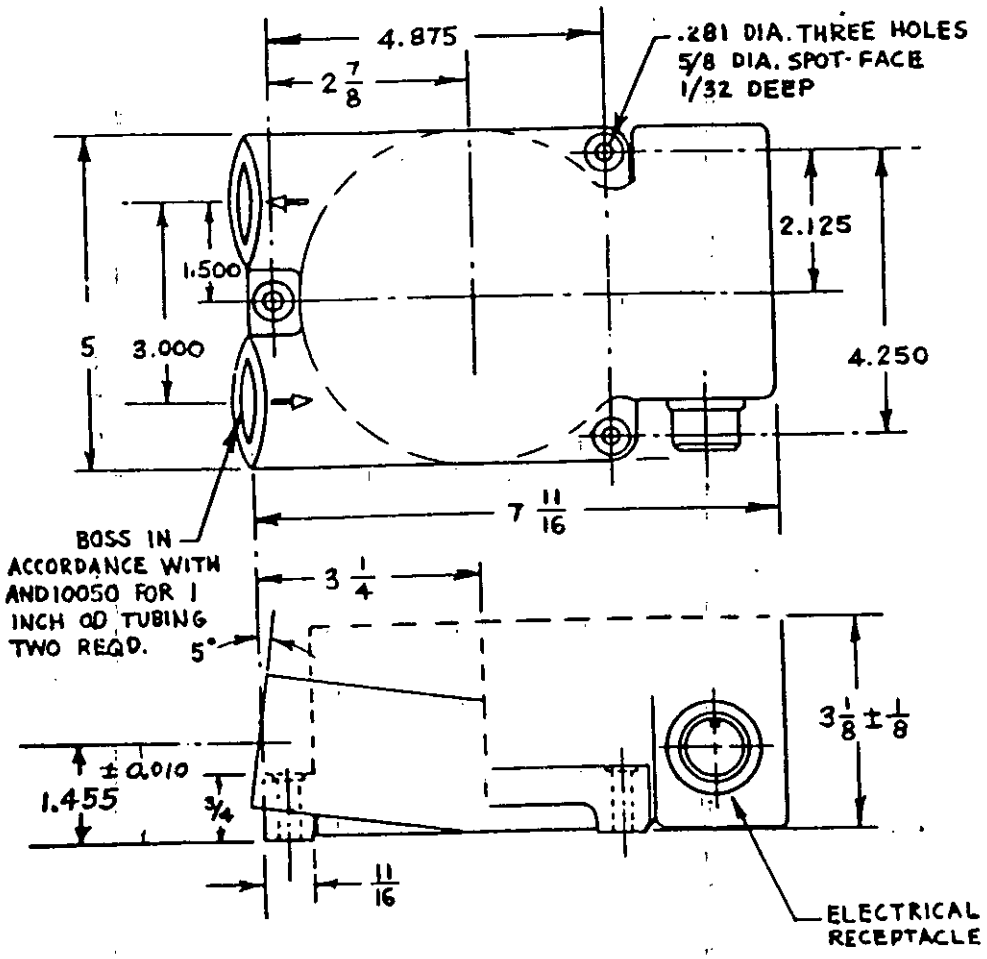

DIMENSIONS IN INCHES:
UNLESS OTHERWISE SPECIFIED,
TOLERANCES: FRACTIONS ± 1/32
DECIMALS ±.005
ANGLES ± 1°

Figure 1. Flowmeter Transmitter.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:32Z
Check the source to verify that this is the current version before use.

3.3.9.2.3 Output characteristics. The linear synchro shall produce an output which is linear within ±0.5 percent for 50° rotation of its rotor. The ratio of its input to output voltage at ±30° shall be unity ±0.5 percent. The output voltage shall lead the input voltage by 8 ±1.5°.

3.3.9.3 Calibration. The calibration of the totalizing section of the transmitter, when operated in conjunction with a master indicator specified in 4.2.2, or equivalent, shall provide flow rate indications within the tolerances of TABLES I and II. The electrical output from the transmitter shall be 1.000V for each 1,000 pph (pounds per hour increment). At a flow rate of 1,500 pph, the electrical output shall be 1.500V at a leading phase angle of 15 ±0.5°. During all calibration tests, calibration of the synchro and linear voltage synchro shall be observed concurrently. Indications of both units shall be within the tolerances specified in TABLES I and II.

3.3.9.4 Electrical receptacle. The electrical receptacle shall have an insert arrangement in accordance with MS33678-18-1P.

TABLE I
Fuel Flow Rate Transmitter Scale Error Tolerances

	Tolerance - pounds per hour		
Fuel flow lb per hour	Room temp	High-temp endurance	Low temp and substitute fuel
200	25	40	50
300	20	30	40
600	20	30	40
900	20	30	40
1,200	20	30	40
1,500	25	40	50
1,800	40	60	70
2,100	40	60	70
2,400	50	75	80
2,700	50	75	80
3,000	60	90	90
4,000	250	400	400
5,000	250	400	400
6.000	250	400	400
7,000	300	450	450
8,000	300	450	450
9,000	400	600	600
10,000	450	650	650
11,000	500	750	750
12,000	600	900	900

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:32Z
Check the source to verify that this is the current version before use.

TABLE II

Pointer Error and Friction Loss Tolerances

Test	Tolerance Pounds per hour 200-3,000 Scale	3,000-12,000 Scale
Position error	20.0	120
Friction		
Room temperature	12.5	100
High temperature	12.5	100
Low temperature	25.0	200
Vibration		
Pointer oscillation	30.0	180
Pointer variation	12.5	100

3.3.9.4.1 Receptacle pins. Receptacle pins shall be designated as follows: A, B, C, D for the synchro-generator power and output leads in accordance with MIL-T-5350. E and J for linear synchro output, and H, G, F for linear synchro power leads.

3.4 Rust inhibitor. A rust inhibitor of a quality and type acceptable to the procuring activity shall be placed in the metering chamber of each transmitter, prior to sealing for shipment.

3.5 Dimensions. The outline dimensions of the transmitter shall conform to FIGURE 1.

3.6 Weight. The weight of the transmitter shall not exceed 7.0 pounds.

3.7 Markings. The direction of fuel flow through the transmitter shall be permanently and legible marked by a raised cast arrow as shown on FIGURE 1 on both top and bottom.

3.8 Synchro housing material. The housings for the synchros used in his transmitter shall be made from stainless steel having a Brinell Hardness of 150 or more. The term "housing" includes all parts which incorporate supports for Rotor Shaft Bearings.

3.9 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item.

3.10 Cadium. Cadmium shall not be used on or in the transmitter without written approval of the preparing activity. Cadmium shall not be used on the exterior of the transmitter. Cadmium shall not come into contact with the fluid being measured.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:32Z
Check the source to verify that this is the currentversion before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.3 General. Sampling, inspection, and testing of the transmitter shall be in accordance with MIL-T-5350. except as specified herein.

4.4 First test point. For tests of the linear synchro unit of the transmitter, a suitable master amplifier and master indicator shall be used. The first test point shall be 200 pph.

4.5 Test conditions. The transmitter shall be tested with the plane of mounting vertical and with the electrical connector at the top.

4.5.1 Master amplifier. The master amplifier shall be a standard especially designed for the purpose. It shall amplify the output voltage from the linear synchro to energize the positioning motor in the master indicator.

4.6 ACCEPTANCE TESTS

4.6.1 Individual tests

Source: https://assist.dla.mil -- Downloaded: 20260-17T08:32Z
Check the source to verify that this is the current version before use.

4.6.1.1 Leak. The transmitter shall be tested for leaks by applying a nonshock hydraulic pressure of 1,600 psi to the inlet connection with the outlet connection bled free of air and capped. The 1,600 psi pressure shall be rapidly applied 5 times at room temperature. After the last application of pressure, there shall be no indication of leaks for a period of 5 minutes as shown by a pressure gage calibrated to 10 psi, or as shown by visual leakage of a colored test fluid. The temperature of the transmitter shall then be reduced to -54° ±2°C by submersion in a cold liquid bath already at this temperature for a period of not less than 15 minutes. While at this temperature, the 800 psi test pressure shall be rapidly applied 5 times. After the last application of pressure, there shall be no evidence of leaks for a period of 5 minutes as detected by the same means used for room temperature portion of this test.

4.6.1.1.1 Alternate method. An acceptable alternate method of cooling the transmitter which can be used instead of the liquid bath described above, is to allow the transmitter to stand in an ambient air temperature of -54° ±2°C for a period of not less than 3 hours and then perform the tests specified in 4.6.1.1.

4.6.1.2 Scale error and friction. Scale error of the transmitter shall be determined at 200 pph end at every test flow rate in TABLE I with both increasing and decreasing rates of flow. The flow with an increasing rate shall be measured by bringing the flow up to, but not exceeding the specified rate. With a decreasing rate, the flow shall be brought down to, but not below the specified rate. During this test, the transmitter shall be vibrated at a frequency of 3,600 cpm with an amplitude not to exceed 0.002 inch. The scale errors shall not exceed the tolerances at room temperature in TABLE I. The difference between the reading on increasing rate of flow and the reading on decreasing rate of flow at each test point shall not exceed the values specified in TABLE II.

4.6.2 SAMPLING PLAN A

4.6.2.1 Pressure drop. The pressure drops within the transmitter for rates of flow specified shall be tested and shall not exceed the tolerances specified in TABLE III.

4.6.2.2 Vibration. The transmitter shall be subjected to vibration for a total of 3 hours on a suitably designed vibration stand at a total excursion of not less than 0.060 nor more than 0.070 inch. The vibration shall be such that the transmitter motion shall be sinusoidal in a plane inclined 45° to the plane of the mounting studs. The frequency of vibration shall be 2,000 cpm. Following the vibration period, the transmitter shall be tested for scale errors and friction as specified in 4.6.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

TABLE III
Pressure Drop Tolerances

	Maximum allowable pressure drop	
Flow rate pounds per hour	Normal	Blocked vane
6,000	1.5	5.5
8,000	2.5	6.5
12,000	5.0	11.0
15,000	7.0	15.0

4.6.2.3 Pointer oscillation. The transmitter shall be subjected to the vibration specified in 4.3.2.2. The frequency of vibration shall be varied gradually from 1,000 to 3,000 cpm while the fuel flow is slowly varied throughout the scale range to determine the magnitude of pointer oscillation and variation on a standard single indicator connected electrically to the transmitter. The magnitude of pointer oscillation and variation shall not exceed the values specified in TABLE II. This test may be combined with the test specified in 4.6.2.2.

4.6.2.4 Seasoning. No seasoning test shall be conducted.

4.6.2.5 Position error. Readings of the master indicator shall be recorded with the transmitter in any position but the normal position, and shall not differ from the readings, while the transmitter is in normal position, by more than the values specified in TABLE II. This test may be combined with the test specified in 4.6.1.2.

4.6.2.6 High temperature. The transmitter shall be subjected to an ambient temperature of 121° ±2°C for a period of 4 hours with fuel in the instrument, but not flowing. During the last 30 minutes of this period, fuel at 38° ±2°C shall be pumped through the transmitter at a rate of 1,000 pounds per hour. The transmitter shall then be tested for scale and friction errors under the same tolerances specified in TABLES I and II.

4.6.3 *SAMPLING PLAN B*

4.6.3.1 Low-temperature exposure. The transmitter shall be subjected to the low temperature exposure test of MIL-T-5350, except that the temperature of both the fuel and the transmitter after the 48-hour period shall be brought up to -54° ±1°C. The scale errors and friction while at this temperature shall not exceed the tolerances specified in TABLES I and II.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:32Z
Check the source to verify that this is the current version before use.

4.6.3.2 High temperature exposure. The transmitter shall be subjected to ambient temperature at 121° ±2°C for a period of 4 hours with fuel in the instrument, but not flowing. The ambient temperature of the transmitter shall then be raised to 190° ±2°C in a period of approximately 10 minutes and maintained at this temperature for 10 minutes. Then the temperature shall be reduced from 190° ±2°C to 121° ±2°C in a period approximately 10 minutes. This complete cycle shall be repeated 6 times. After the temperature cycling, the transmitter shall meet the scale error and friction tolerances of the high temperature test.

4.6.3.3 Substitute fuel. The transmitter shall be subjected to the test specified in 4.6.1.2, except that the fuel used shall be in accordance with ASTM D910 and the specific gravity shall be 0.710 ±0.005 at room temperature. The scale errors shall not exceed the tolerances specified in TABLE I.

4.6.3.4 Bypass valve. The pressure drop, with the transmitter movable element blocked in the zero flow position, shall be measured by any suitable method and shall not exceed the value specified in TABLE III.

4.6.3.5 Endurance. The transmitter shall be subjected to 100,000 applications of flow to produce an indication from 0 to 80 ±5 percent of the range of the transmitter and back to 0 at a rate of 15 ±10 cpm. The scale error and friction test shall be conducted in not less than 1 hour after the completion of the endurance cycling, and the transmitter shall not exceed the tolerances specified in TABLE I.

4.6.3.6 Environmental. Immediately following each of the environmental tests, the transmitter shall be subjected to the tests specified in 4.6.2.1. The tolerances specified in TABLES I and II shall apply.

4.6.3.7 Vibration-resonant and high frequency. The transmitter shall be tested under resonant and high-frequency conditions as described in the following paragraphs and schedule. The range of frequencies and vibratory accelerations shall be those specified for vibration test, Procedure I, TABLE 514.2-II, FIGURE 514.2.-2 of MIL-STD-810. Half of each resonant and cycling period shall be conducted at room temperature and half at 95°C (199°F). The function of the test transmitter shall be checked concurrently with the operation of scanning the frequency range for resonant frequencies. Unless otherwise specified by the inspector, fuel flowing at a constant rate of 2400 pph shall be maintained through the transmitter during vibration. The magnitude of pointer oscillation and variation on a master servoed indicator connected electrically to the transmitter shall not exceed 50 pph.

4.6.3.7.1 High-frequency vibration. The transmitter vibration cycling test shall be conducted in accordance with vibration tests, Procedure I, TABLE 514.2-II, FIGURE 512.2-2 of MIL-STD-810. Half of each resonant and cycling period shall be conducted at room temperature and half at 95°C (199°F).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

4.6.3.7.1.1 Axes of vibration. The transmitter shall be vibrated in accordance with the test schedule specified in TABLE IV, through each of three mutually perpendicular axes of vibration.

TABLE IV
Vibration Technique

Frequency cps ±10 percent	Double amplitude 1/ inches ±10 percent	Time each axis minutes
120	0.013	10
185	0.0055	10
250	0.0029	10
315	0.0018	10
380	0.0012	10
445	0.0009	10

1/ The amplitude shown correspond to an acceleration of 10 g.

4.6.3.7.1.2 Following the vibration period, the transmitter shall meet the requirements of the tests specified in 4.6.1.1 and 4.6.1.2.

4.7 Inspection of packaging. Except when commercial packaging is specified, the sampling and inspection of the preservation and interior package marking shall be in accordance with groups A and B quality conformance inspection rquirements of MIL-P-116. The sampling and inspection of the packing for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification shown in section 5. The inspection of marking for shipment and storage shall be in accordance with MIL-STD-129. The inspection of commercial packaging shall be as specified in the contract (see 6.2).

5. PACKAGING

5.1 Preservation. Preservation shall be level "A" or "C" as specified (see 6.2).

5.1.1 Preservation-packaging. Unless otherwise specified by the contracting activity, item shall be packaged in Quantity Unit Pack (QUP) of one each. Each item will be provided a preservation method IC-1 In Accordance With (IAW) MIL-P-116.

5.1.2 Cleaning. Item shall be cleaned in accordance with MIL-P-116 C-1 process.

5.1.3 Drying. Immediately after cleaning, the item shall be dried following any one or combination of the drying procedures listed in MIL-P-116. The drying procedures employed shall not be injurious to the item.

5.1.4 Level A. Item shall be preserved in accordance with MIL-P-116 and MIL-STD-2073-1 to provide a method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

5.1.5 Level C. Item shall be individually preserved in a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity as specified in MIL-P-116 and MIL-STD-2073-1.

5.2 Packing. Packing shall be level "A", "B", or "C", as specified (see 6.2).

5.2.1 Container-cushioning. Unit container requirements shall conform to MIL-B-121, barrier material, unless otherwise specified by the contracting activity. Unit container shall be large enough to allow for the application of cushioning/wrap material, of sufficient density and thickness, to protect the unit container from punctures. Intermediate/shipping containers shall be large enough to allow for the application of sufficient cushioning material, between the unit container and intermediate/shipping container. Cushioning material shall be of sufficient density and thickness to insure shock transmission does not exceed peak values in G's established for the item.

5.2.2 Level A. Fiberboard containers do not meet Level "A" container criteria.

5.2.3 Level B. Item will be preserved as specified in 5.1 and shall be packed in exterior containers conforming to PPP-B-1672, weather-resistant unless otherwise specified by the contracting activity. Exterior container shall be uniform shape, size and minimum tare and cube, consistent with the protection required. Closure shall be in accordance with appropriate PPP-B-1672 procedure and contracting activity.

5.2.4 Level C. Item will be packed in such a manner that will afford adequate protection against physical damage during direct domestic shipment from the supply source to the first receiving activity. These packs shall conform to MIL-STD-2073-1.

5.3 Marking. Unit, intermediate, and exterior containers shall be marked in accordance with special markings required by the contracting activity and MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Type J-7 transmitter covered by this specification is intended to indicate the rate of fuel flow in pounds per hour being consumed by an aircraft jet engine, and the total flow rate for all engines of the aircraft in conjunction with suitable indicators.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Ordering data shall be as specified in MIL-T-5350.

d. See section 5 for application levels of preservation, packaging and packing.

6.3 First article. When the first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, or a standard production item from the contractor's current inventory (see 3.1) and the number of items to be tested as specified in 3.1.

6.3.1 First article tests. This specification requires First Article Tests. The organization responsible for these tests is Oklahoma City Air Logistics Center/TICLA, Tinker Air Force Base, OK 73145-5990.

6.4 Inactive status. MIL-T-7477D(USAF) is inactive for new design and is no longer used except in the procurement of replenishment spares as necessary to maintain equipment in the field until obsolescent or wear out.

65. Subject term (key word) listing.

Bypass
C-130
Electromechanical
Swinging Door

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issued due to the extensiveness of the changes.

Custodian:
AIR FORCE -99

Preparing Activity:
AIR FORCE -71

Project Number:
6620-F539

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-7477D(USAF)	941115

3. DOCUMENT TITLE
TRANSMITTER, RATE OF FLOW, FUEL, SYNCHRO TYPE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
OC-ALC/TICLA	405-736-5960	336-5960
c. ADDRESS (Include Zip Code) 3001 Staff Dr TAFB OK 73145-5990	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete 198-290

Source: https://assist.dla.mil Downloaded: 2026-10-17T08:32Z
Check the source to verify that this is the current version before use.