MILITARY SPECIFICATION

DISPENSER, MINE:
GROUND VEHICLE, M128;
PREPARATION FOR SHIPMENT AND STORAGE OF

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification provides the general requirements for the preservation, packaging, packing and marking for the M128 Ground Vehicle Mine Dispenser and shall hereafter be referred to as processing.

1.2 Classification. Processing for shipment and storage shall be Level A in accordance with the provisions of this specification.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	-	Plastic Sheet and Strip, Thin Gauge, Polyolefin
GG-T-250	-	Tester, Antifreeze Solutions
NN-P-530	-	Plywood, Flat, Panel
QQ-S-781	-	Strapping, Steel, Flat and Seals
SS-G-659	-	Graphite, Dry (Lubricating)
UU-T-81	-	Tags, Shipping and Stock
VV-F-800	-	Fuel Oil, Diesel
MMM-A-178	-	Adhesive, Paper Label, Water- Resistant
MMM-A-260	-	Adhesive, Water-resistant (For Sealing Waterproof Paper)
PPP-B-621	-	Box, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes

FSC: 1095

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

PPP-T-76	-	Tape, Packing, Paper (For Carton Sealing)
PPP-T-60	-	Tape, Packaging, Waterproof
PPP-T-97	-	Tape; Pressure-Sensitive Adhesive, Filament Reinforced
PPP-T-42	-	Tape, Packaging - Masking, Paper
PPP-C-1797	-	Cushioning Material, Low Density, Unicellular, Polypropylene Foam

MILITARY

MIL-P-116	-	Preservation-Packaging, Methods of.
MIL-B-117	-	Bags, Sleeves and Tubing Interior Packaging
MIL-B-121	-	Barrier Material, Waterproofed, Greaseproofed, Flexible
MIL-L-2105	-	Lubricating Oil, Gear, Multipurpose
MIL-C-5501	-	Caps and Plugs, Protective, Dust and Moisture Seal
MIL-H-6083	-	Hydraulic Fluid, Petroleum Base, for Preservation and Operation
MIL-P-8793	-	Paint (Gloss and Nonspecular), For Use On Elastomeric Pigmented Film
MIL-C-11755	-	Antifreeze, Artic-Type.
MIL-C-17504	-	Coating, Compound, Acrylic Clear
MIL-L-21260	-	Lubricating Oil, Internal Combustion Engine, Preservative and Break-In
MIL-B-22191	-	Barrier Materials, Transparent, Flexible, Heat Sealable
MIL-P-26514	-	Polyurethane Foam, Rigid or Flexible, For Packaging
MIL-P-46002	-	Preservative Oil, Contact and Volatile Corrosion Inhibited
MIL-A-46153	-	Antifreeze, Ethylene Glycol, Inhibited, Heavy Duty, Single Package
MIL-B-46176	-	Brake Fluid, Silicone, Automotive All Weather, Operational and Preservative
MIL-T-46755	-	Tires, Pneumatic and Tires, Semipneumatic: Installed on Vehicles, Preparation for Storage
MIL-E-52798	-	Enamel, Alkyd, Camouflage
MIL-P-60312	-	Parts, Molded, Plastic Foam, Polystyrene
MIL-D-81298	-	Dye, Liquid Red, for the Detection of Leaks in Aircraft Fuel Systems

STANDARDS

FEDERAL

Fed. Test Method Std. No. 141	-	Paint, Varnish, Lacquer and Related Materials, Methods of Inspection, Sampling and Testing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

9291399 - Dispenser Fitted Cover

TECHNICAL MANUAL

MILITARY

TM-55-1095-205-14 - Transportability Guidance, Dispenser, Mine: Ground Vehicle, M128

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specified procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with all applicable specifications and standards. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.1.1 Tags. Tags used for identification and warning marking shall conform to UU-T-81, Type A with waterproof ink.

3.2 Initial Production Dispenser. Unless otherwise specified, one of the first ten (10) production processed dispensers shall be subjected to the inspection in 4.2. Approval of one of the first ten (10) production processed dispensers shall not relieve the supplier of his obligation to process all dispensers in accordance with this specification. Except as otherwise specified by the procuring activity, any change to materials or processing after approval of one of the first ten (10) production processed dispenser shall require an additional production processed dispenser be inspected as specified in 4.2 Government representative shall select the dispenser to be inspected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3 Processing. Level A.

3.3.1 Record Forms. Two (2) copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one (1) copy of DD Form 1397 shall be placed in a bag conforming to Type I, Class B, Style 2 of MIL-B-117, 6 mil thick. Bag shall be closed by heat sealing and secured in the operators control box storage cabinet. The other copy of DD Form 1397 shall be waterproofed with adhesive conforming to MMM-A-178 and securely attached to the door of the electrical enclosure.

3.3.2 Repainting. Painted surfaces of the dispenser on which the paint has been damaged shall be cleaned and repainted in accordance with the painting requirements of the end item specification (see 6.3).

3.3.3 Preservatives and Atomize Spray Equipment. Preservatives specified herein, identified by "P" number, shall conform to the applicable specifications listed in MIL-P-116. When atomize spraying of preservative oils is specified, equipment shown in Figures 1 and 2, or equivalent, shall be used. Compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

3.3.4 Disassembly. Maximum reduction in cube shall be effected for shipment to ports and overseas, or to facilitate loading the maximum number of dispensers on the common carrier. The four (4) leveling jacks shall be raised to their highest adjustment and rotated to the stowed position. The locking pin shall be engaged in each jack. The lower, retractable lunette shall be moved to the inner positon and secured with locking pin. Four (4) side reflectors shall be removed, (two (2) from front sides of dispenser and two (2) from rear sides), and screws, washers, lens and gasket secured to each reflector housing with tape, PPP-T-42. Reflectors shall be stored in the on vehicle equipment (OVE) storage box (see 3.3.5).

3.3.5 On Vehicle Equipment (OVE). The on vehicle equipment (OVE) for the dispenser consists of a spade, fire extinguisher, mine dispenser manual crank, tire hand crank, four (4) leveling jack hand cranks, an inadvertent mine prevention pin assembly, two (2) safety chain shackles, and tool kit. Included in the tool kit is a tools roll, tire gauge, pliers, two (2) screwdrivers, double-end socket, three (3) wrenches, rawhide mallet and socket wrench bar. The double-end socket shall be coated with P-19 preservative and installed in the large round tube located in the OVE cabinet under the operator's control box storage cabinet. The socket wrench bar shall be coated with P-19 preservative and installed in the smaller round tube located in the OVE cabinet. The tire gauge, pliers, screwdrivers, and wrenches shall be coated with P-19 preservative and individually wrapped in barrier material, type II, grade A, class 2, MIL-B-121 and secured with tape, PPP-T-42. These tools shall be packed into the tools roll, the roll folded tightly and installed on the top shelf inside the operator's control box storage cabinet. The rawhide mallet shall be installed in the circular tube located on the side wall inside the operator's control box storage cabinet. The spade, mine

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

dispenser manual crank, tire hand crank and four (4) leveling jack hand cranks shall each be coated with P-19 preservative and stored in the wood OVE storage box as shown in Figure 5. The fire extinguisher, inadvertent mine prevention pin assembly (wrap pennant around pin), two (2) safety chain shackles (coat with P-19 preservative) and four (4) reflectors (see 3.3.4) are each to be placed in fiberboard boxes, boxes sealed with tape, PPP-T-76 and stored in the wood OVE storage box as shown in Figure 5. (Add additional filler material to each box to assure tight packing.) Two (2) belts (alternator and fan) removed from the engine (see 3.3.11) shall be placed in barrier bag, the barrier bag heat sealed and the belts stored in the wood OVE storage box as shown in Figure 5. The keys for the padlocks (see 3.3.24) shall be placed in the barrier bag, the bag heat sealed and the keys stored in the wood OVE storage box as shown in Figure 5. Six (6) cushions shall be positioned around and on top of items as shown in Figure 5 to insure tight packing. Filler material shall be added, as required, to insure contents are tightly packed. The wood box shall be closed by strapping with three (3) metal straps, class 1, type I, finish B, size 3/4 in, QQ-S-781. Each fiberboard box, bag and wood box shall be marked to indicate contents, in accordance with MIL-STD-129.

3.3.5.1 Wood OVE Storage Box On Dispenser. The packed and strapped wood OVE storage box (see 3.3.5 and Figure 5) shall be placed on the front of the dispenser chassis, behind the control cable connector and in front of the launcher assembly. The box shall be positioned across the width of the chassis and secured to the chassis with two (2) metal straps, class 1, type I, finish B, size 3/4 in, QQ-S-781. One strap shall be positioned across the forward portion of the box, down the ends and under the chassis. The second strap shall be positioned across the rear portion of the box, around and under the dispenser brake support and under the chassis. A piece of solid fiberboard, PPP-F-320, shall be placed at each contact point between the strapping and the chassis.

3.3.6 Printed Circuit Card Assembly For Built In Test Equipment (B.I.T.E.)/ALARM Control Panel. The seventeen (17) printed circuit card assemblies shall be removed from the B.I.T.E./ALARM control panel and packaged separately for shipment on the dispenser. A rubber shorting bar shall be placed over the connector on each card assembly. Each card assembly shall be wrapped with one polypropylene wrap and secured with three (3) pieces of tape, PPP-T-42. Card assembly 1 thru 16 shall be wrapped in the 12 x 10 in. cushioning and card assembly 17 shall be wrapped in the 16 x 7 1/2 in. cushioning. Each wrapped card assembly shall be inserted into a barrier bag and heat sealed. Wrapped card assembly 1 thru 16 shall be inserted into the 6 1/2 x 14 in. bag and card assembly 17 shall be inserted into the 8 1/2 x 11 1/2 in. bag. Each card assembly 2, 3, and 4 shall be placed into one of the 10 1/4 x 5 3/8 x 1 1/4 in. fiberboard box, card assembly 1, 5 thru 16 into a 10 1/4 x 5 3/8 x 1 in. fiberboard box and card assembly 17 into the 7 3/4 x 7 3/4 x 1 1/8 fiberboard box. Each box shall be sealed with tape, PPP-T-76. Each box and bag shall be marked indicating nomenclature of card assembly enclosed. Cushions and packed fiberboard boxes shall be placed in wood box as

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

shown in Figure 6. Fiberboard boxes containing card assemblies 1 thru 14 shall be placed on their sides into the wood box on top of the bottom cushion. Fiberboard boxes containing card assemblies 15, 16 and 17 shall be laid flat and placed on top of the other boxes and then the top cushion placed over these boxes. Filler material, PPP-F-320, shall be added around contents, as required, for tight packing. Wood box shall be closed by strapping with two (2) metal straps, class 1, type I, finish B, size 3/4 in, QQ-S-781. The exterior of wood box shall be marked indicating contents, in accordance with MIL-STD-129.

3.3.6.1 Wood Box With Printed Circuit Card Assembly On Dispenser. The packed and strapped wood box containing the printed circuit card assembly (see 3.3.6 and Figure 6) shall be placed on top of the operator's control box storage cabinet. The box shall be secured in place with two (2) metal straps, class 1, type I, finish B, size 3/4 in, QQ-S-781, positioned widthwise and one metal strap lengthwise over the box and down the sides and ends and under the cabinet. A piece of solid fiberboard, PPP-F-320, shall be placed at each contact point between the strapping and the storage cabinet.

3.3.7 Rubber Tires. For shipment by all modes of transportation except over the road, tires mounted on wheels (road tires) shall be inflated to 10 pounds above pressure recommended for a maximum load. Spare tire and launcher tire shall be inflated to normal operating pressure and preserved in accordance with MIL-T-46755.

3.3.8 Cleaning and Drying. Exterior surfaces of the dispenser shall be free of dirt, dust, grease and any other contaminants. Exposed surfaces for which application of a preservative is specified shall be cleaned and dried in accordance with any applicable process and procedure of MIL-P-116 which will accomplish cleaning and not damage the item.

3.3.9 Miscellaneous Preservation. All exterior, unpainted surfaces including all surface type finishes such as black oxide chromates and phosphates shall be coated with type P-19 preservative. This includes, but is not limited to, safety chains, springs, both lunette assemblies, tube fittings, brackets, clamps, leveling jacks and drawbar surfaces exposed by disassembly. All exposed oil can points such as, but not limited to, levers, locking bars, latches, hinges, hinge pins, locking pins, lunette pins, locking levers, linkage and threaded ends of yokes and related clevis pins shall be lubricated with oil conforming to P-9 preservative. Working mechanisms of padlocks, latches, door locks and hand operated locking knobs shall be lubricated with graphite conforming to SS-G-659. Excess lubricant shall be removed after lubrication.

3.3.10 Cooling System. Cooling system shall be protected by one of the following procedures: For shipment to, and storage in areas where the temperature drops below minus 40°F, system shall be protected as specified in 3.3.10.1. For all other shipments and storage, the cooling system shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

protected as specified in 3.3.10.2. NOTE: When cold water is used for flushing engine to accelerate engine cooling (see 3.3.14.1), cooling system protection procedures shall be accomplished after engine processing. Premixing of the solutions, as specified in 3.3.10.2, shall be accomplished prior to filling cooling system to operating level. DD Form 1397 (see 3.3.1) shall be completed to indicate coolant used.

3.3.10.1 Antifreeze Compound Procedure. Cooling system shall be filled to operating level with antifreeze compound conforming to MIL-C-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) -DO NOT DRAIN" shall be securely attached to radiator filler neck.

3.3.10.2 Water and Antifreeze Procedure. Cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153 and water. Engine shall be operated until a temperature has been reached that causes the thermostat to open, assuring complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN" shall be securely attached to radiator filler neck.

3.3.11 Belt Pulleys and Drive Belts. Unpainted surfaces of pulley grooves shall be coated with P-19 preservative. Both drive belts (alternator and fan) shall be removed and stored in the OVE storage box (see 3.3.5). A warning tag, bearing the information "BELTS FOR ALTERNATOR AND FAN REMOVED - STORED IN WOOD OVE STORGE BOX" shall be securely attached to one of the pulleys. Tag each belt with appropriate identification (fan or alternator).

3.3.12 Engine Crankcase. Unless otherwise specified (see 6.2), engine crankcase shall be filled to operating level with lubricating oil conforming to MIL-L-21260, grade 10 or 30 (as applicable). DD Form 1397 shall be completed to indicate type and grade of lubricating or operating oil used.

3.3.12.1 Crankcase Opening. Six (6) ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomize sprayed into the crankcase through the dipstick-oil filler tube. A flexible extension of sufficient length shall be used to allow spraying nozzle to be within the crankcase. Nozzle shall not be submerged in the crankcase oil.

3.3.13 Fuel Tank. Fuel tank in the dispenser shall be completely drained of all fuel by removing fuel tank drain plug. No preservation of fuel tank is necessary. Metallic drain plug and tank filler cap and chain shall be coated with lubricating oil conforming to grade 10, MIL-L-21260 and reinstalled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.14 Diesel Engine Processing.

3.3.14.1 Fuel System and Combustion Chamber. Prior to processing engine, the engine shall be cooled to assure that cylinder head temperature, measured at injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine coolant, or by waiting the period of time required to arrive at the above specified temperature. When ambient temperature exceeds 100°F, engine shall be cooled to a temperature equivalent to ambient. After engine has been cooled, the fuel supply system from the fuel tank shall be shut off. A portable container with two compartments shall be positioned to provide gravity feed to the engine. One compartment shall be filled with preservative oil conforming to grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. The second compartment shall be filled with diesel fuel conforming to VV-F-800 (see note 1). The fuel line between the primary fuel filter and fuel pump at the primary fuel filter outlet shall be disconnected. The residual diesel fuel from the secondary fuel filter shall be drained. (Note: If vehicle is not equipped with a secondary fuel filter, disregard all requirements concerning the secondary fuel filter.) The filter can shall be removed and the filter element extracted. The filter can shall be filled with oil, preservative, grade 1, MIL-P-46002 and replaced. The residual dispenser fuel return line shall be disconnected at quick disconnect coupling. A transparent plastic fuel line shall be connected to the engine end of the disconnected fuel return line and the other end of the plastic fuel line inserted into a recovery container to collect the residual returned oil. An air restrictor plate fabricated in accordance with Figure 4 shall be installed at the nearest and most convenient place to cut off the air supply to the engine; assuring that air leakage to the engine is completely sealed off. The fuel line on the auxiliary fuel tank shall be turned to the preservative oil position (grade 1, MIL-P-46002). The throttle shall be placed at the maximum open position and engine cranked with starter for a minimum period of 30 seconds, not exceeding a maximum of 45 seconds. (Note: Engine may fire for approximately five (5) seconds. If engine continues to fire, stop cranking and rock starter intermittently to prevent engine from running.) The fuel valve on the auxiliary fuel container shall be turned to the off position. The filter can shall be removed from the secondary fuel filter, The oil, preservative, grade I, MIL-P-46002, shall be drained and the can, wiped clean with a clean lint free cloth. The element shall be reinstalled, the can filled with diesel fuel, VV-F-800, and the filter can reinstalled.

NOTE 1 - The container shown in Figure 3 has proven satisfactory for engine preservation.

CAUTION: Special precautions shall be taken to assure that time limits specified shall not be exceeded or the engine, starter or starter solenoid may be damaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.14.2 Engine Purging. The fuel return lines shall be purged of all oil, preservative, MIL-P-46002, by turning the auxiliary fuel tank valve to the diesel fuel position. The engine throttle shall be placed in the NO injection setting. The engine shall be cranked by starter for a period of time to remove all traces of red colored preservative oil from the plastic return line.

> CAUTION: DO NOT OPERATE STARTER FOR A PERIOD EXCEEDING 45 SECONDS. If preservative oil has not been purged, the starter shall be rested for three minutes and purging operation repeated.

The auxiliary fuel tank valve shall be placed in the OFF position, the fuel line removed and reconnected to the outlet side of primary fuel filter. The vehicle fuel supply system shall be turned on, the air restrictor plate shall be removed and any disassembled parts shall be reinstalled. The plastic fuel return line shall be disconnected.

3.3.14.3 Air Intake System. Air intake tube at outlet side of air cleaner shall be disconnected and one ounce of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomize sprayed into intake opening directed toward the engine. Air intake tube to air cleaner shall be reconnected.

3.3.14.4 Exhaust System. Two ounces of preservative oil conforming to grade 1 of MIL-P-46002 shall be atomize sprayed into exhaust pipe toward the engine. Unpainted exterior surfaces of exhaust system, except manifold, shall be coated with type P-19 preservative. Opening of exhaust pipe shall be sealed with tape conforming to type IV, PPP-T-60. A warning tag, bearing the information "OPENING OF EXHAUST PIPE SEALED - REMOVE SEAL BEFORE STARTING ENGINE" shall be securely attached to the exhaust pipe.

3.3.14.5 Air Cleaner. Air cleaner element shall be removed and the unpainted, uncoated, interior metal surfaces of the air cleaner shall be atomize sprayed with oil conforming to grade 1 of MIL-P-46002. Element shall be reinstalled and openings shall be sealed with tape conforming to type IV, PPP-T-60, or covered with 6 mil polyethylene conforming to type II of L-P-378, secured with PPP-T-60 type IV tape. A warning tag, bearing the information "AIR CLEANER SEALED - REMOVE SEAL BEFORE STARTING ENGINE", shall be securely attached to the air cleaner frame.

3.3.14.6 Engine Electrical Components. Alternator and starter shall have openings sealed with tape conforming to type IV, PPP-T-60. A warning tag, bearing the information "ALTERNATOR AND STARTER SEALED - REMOVE SEALS BEFORE STARTING ENGINE", shall be securely attached to the alternator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.14.7 Cabinet Tag. A warning tag, bearing the information "ENGINE PRESERVED, AIR CLEANER, EXHAUST PIPE, ALTERNATOR AND STARTER SEALED - REMOVE SEALS BEFORE STARTING ENGINE" shall be secured in a conspicuous location in the operator's control box cabinet or main control panel cabinet.

CAUTION: ENGINE SHALL NOT BE OPERATED AFTER PROCESSING PER PARA. 3.3.14.1 thru 3.3.14.7.

3.3.15 Magazine Gearbox, Pump Drive Assembly, Rotary Actuator Case, and Vehicle Speed Sensing System Gearbox. Both magazine gearboxes, pump drive assembly,and rotary actuator case shall be filled to operating level with lubricating oil conforming to MIL-L-2105, grade 80/90 as specified in the applicable drawing, specification or lubrication order. Vehicle speed sensing system gearbox shall be filled to operating level with lubricating oil conforming to MIL-L-2105, grade 75 as specified in the applicable drawing, specification or lubrication order. These systems shall be operated through all ranges for a minimum of two (2) minutes at sufficient speed to assure lubricant coverage of all interior parts and surfaces. DD Form 1397 (see 3.3.1) shall be completed to indicate grade and type of lubricating oil used.

3.3.16 Magazine Reel Drive Chain, Drive Sprocket, and Infeed Conveyor Drive Chain. Both reel drive chains, drive sprockets, and conveyor drive chains shall be coated with enough type P-3 or P-9 preservative to insure penetration of the preservative to the inner surfaces of the rollers, pins and bushings. Excess preservative shall be removed. All surfaces of the chains and sprockets shall be coated with type P-19 preservative.

3.3.17 Pinion Gear, Bearing - Turn Table, Leveling Jack, Swivel and Lock Pin, Trunnion Axle, and Wheel Bearings. Pinion gear and bearing - turn table shall have gear teeth, bearings and any unpainted surfaces coated with type P-11 preservative grease. Leveling jacks, swivel and lock pins and trunnion axle shall have fittings, sliding or moving parts or any unpainted surfaces coated or packed with type P-11 preservative. Wheel bearings shall be packed with type P-11 preservative. Excess preservative shall be removed after application.

3.3.18 Hydraulic Reservoir and Hydraulic System. Hydraulic reservoir shall be filled to a sufficient level for operation with hydraulic fluid conforming to MIL-H-6083 as specified in the applicable drawing, specification or lubrication order. The hydraulic system shall be operated through all ranges for a minimum of two (2) minutes at a sufficient speed to assure fluid coverage of all interior parts and surfaces. Completely drain hydraulic fluid from reservoir. Hydraulic fluid may be reused if not contaminated.

3.3.19 Brake Systems, Air-Hydraulic. Exterior, unpainted, or threaded surfaces such as cables, clevises, and linkage of service and hand brakes and disc brake on launcher wheel shall be coated with type P-19 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.19.1 Hydraulic Master Cylinders. Both master cylinders, located under chassis, and master cylinder for actuator assembly, located on lower lunette, shall be filled to operating level with brake fluid conforming to MIL-B-46176 as specified in the applicable drawing, specification or lubrication order.

3.3.19.2 Air Lines Connections and Air Reservoir Tank. Air reservoir tank shall be drained of all condensate and interior surfaces atomize sprayed with lubricating oil conforming to grade 10 of MIL-L-21260. Drain plugs and threaded areas shall be coated with the same grade of lubricating oil and plugs reinstalled. Drain valves shall be closed. Exposed ends of service air lines and dummy couplings shall be covered with tape conforming to type IV, PPP-T-60. Air line filters shall be drained and closed. Exhaust ports of relay emergency quick release and relay valves shall be closed by inserting plastic plugs conforming to MIL-C-5501 or sealed with tape conforming to type IV, PPP-T-60. A warning tag, bearing the information "EXHAUST PORTS OF BRAKE RELAY VALVES SEALED - REMOVE PLUGS OR TAPE BEFORE OPERATING BRAKES", shall be securely attached to the ends of the air line hoses.

3.3.20 Air Lines, Lighting Cable, Safety Chains and Wheel Chocks. Air line hoses, lighting cable and safety chains shall be wrapped around upper or lower lunette or dispenser chassis. Connectors at end of air lines shall be secured in dummy couplings under chassis. Connector on lighting cable shall be secured in retaining clamp under chassis. Hooks on ends of safety chains shall be secured in position on each side of trailer. (Two shackles shall be removed and stored in OVE storage box, see 3.3.5.). Hoses, cable and chains shall be secured in place with tape conforming to type IV of PPP-T-97, 3/4 inch width. Tape shall completely encircle the dispenser member to which it is attached and overlap approximately six inches. Hoses and cable shall have a bend of not less than 12 inch radius when wrapped around dispenser member. Dust cap shall be positioned on connector located on dispenser behind lunettes. Wheel chocks and chains shall be attached to the corresponding brackets on the rear of the dispenser chassis. Secure chocks and chains in place with tape, PPP-T-97, as above.

3.3.21 Batteries and Cables. Both dry charged batteries (without electrolyte) shall be installed and secured in battery boxes. Battery posts, cable terminals and exposed parts of cables shall be sparingly coated with P-11 grease and secured to battery box with 3/4 inch tape conforming to type IV of PPP-T-97. (Do not connect cable terminals to battery posts.) Filler cap openings (when applicable) shall be sealed by placing a 2 inch wide by 3 mil thick sheet of film, conforming to type II of MIL-B-22191, over all filler cap openings with cap removed. The sheet shall be of sufficient length to allow sheet to be depressed into the filler cap opening to the same depths as the filler plug. Filler caps shall be screwed or inserted into filler openings to form a complete seal without damaging the sheet. Close and secure battery covers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.22 Coolant Heater and Start Aid Assembly. The solenoid actuator valve shall be disconnected from the ether cylinder. The cap (attached by chain to bracket) shall be placed tightly over connection on ether cylinder. The solenoid actuator valve and other metallic connections shall be coated with type P-19 preservative. The solenoid actuator valve shall be secured to bracket next to ether cylinder with tape, type IV, PPP-T-97. Coolant heater shall have the fuel supply shut off valve, located at the inlet side of the fuel filters, turned to the off position. The main fuel line, supplying fuel to the coolant heater, shall be disconnected at a point closest to the shut off valve and fuel from fuel lines shall be allowed to drain. The interior of heater shall be atomize sprayed with lubricating oil conforming to grade 10, MIL-L-21260 and the end of the disconnected fuel line and shut off valve sealed with plastic plugs/caps conforming to MIL-C-5501 or with tape conforming to type IV, PPP-T-60. Prior to placing start aid kit in operation, the cap from ether cylinder shall be removed and solenoid actuator valve reconnected. Prior to placing coolant heater in operation, the plugs/caps or tape shall be removed from fuel line and shut off valve. Insure that fuel tank is filled and shut off valve is opened. The coolant heater fuel pump shall be operated and a minimum of one quart of fuel drained through the fuel line into a portable container. The fuel lines shall be reconnected. Three warning tags, each bearing the information - "SOLENOID ACTUATOR VALVE DISCONNECTED FROM ETHER CYLINDER ON START AID ASSEMBLY - RECONNECT BEFORE OPERATION. FUEL LINE DISCONNECTED AND SEALED ON COOLANT HEATER - REMOVE SEALS AND RECONNECT FUEL LINE PRIOR TO STARTING HEATER", shall be prepared. One tag shall be secured to preheat control switch on main control panel, one to bracket or clamp holding ether cylinder, and one to inlet on coolant heater.

3.3.23 Operator's Control Box and Control Cables. The operator's control box shall be secured on mounts inside operator's control box storage cabinet. The 35 ft. and 12 ft. control cables shall be coiled and stored on the lower shelf in the storage cabinet. The storage cabinet door shall be closed and secured.

3.3.24 Doors, Covers and Panels. All doors, covers and panels shall be closed and secured or locked, as required. This shall include, but is not limited to, main control panel cabinet door, operator's control panel storage cabinet door, on vehicle equipment door, BITE/Alarm control panel cabinet door, magazine access doors, drive sprocket access doors, launcher wheel door, muzzle cover, records compartment door, infeed chute covers, magazine entrance covers, battery box covers, launcher access cover and engine hinged panels. Keys for padlocks used to secure doors shall be stored in the wood OVE storage box (see 3.3.5).

3.3.25 Launcher Assembly. The launcher assembly shall be rotated completely to the right side of the dispenser and secured in this position by tightly attaching a metal strap, class 1, type I, finish B, size 3/4 in, QQ-S-781, between the eye bolt located on the support plate of the launcher assembly and the assist handle located on the outside edge of the right magazine. A piece of solid fiberboard, PPP-F-320, shall be placed between the strap and the metal of the dispenser at each contact point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.3.26 Dispenser Fitted Cover. The dispenser cover (P/N 9291399) shall be placed over the entire dispenser and secured at the corners and along the front, back and sides. The cover shall be pulled tightly over the dispenser but care must be taken not to tear or puncture the cover.

3.4 Marking. In addition to the special marking requirements specified in this paragraph, dispenser contract or purchase order, the dispenser shall be marked in accordance with the applicable requirements of MIL-STD-129.

3.4.1 Preservation Data Marking. Preservation data marking shall be stenciled or printed on pressure sensitive labels for CONUS and oversea shipments. Labels shall be 2 - 1/2 inches high and twenty (20) inches wide. The following basic marking is required: (see following example)

a. Packaging document number and revision number, level and date of protection.

b. Gross weight, 12,500 lbs; cube, 1122 cu ft; outside dimensions, L198 W96 H102

c. Contractor's name or depot symbol.


d. When dispensers are processed in accordance with manufacturer's standard practice or deviation is made from the processing document, the statement "not processed for storage" shall appear in lieu of the level of processing.

e. Preservation data marking shall be 1/2 inch high and shall be spaced as indicated on following illustration.

f. Labels for Level A shipments, other than entirely printed, shall be waterproofed by coating the entire outer surface of the label with coating compound conforming to Specification MIL-C-17504, or waterproofing compound certified as equal to the above and compatible with the label material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PRESERVATION DATA MARKING LABEL

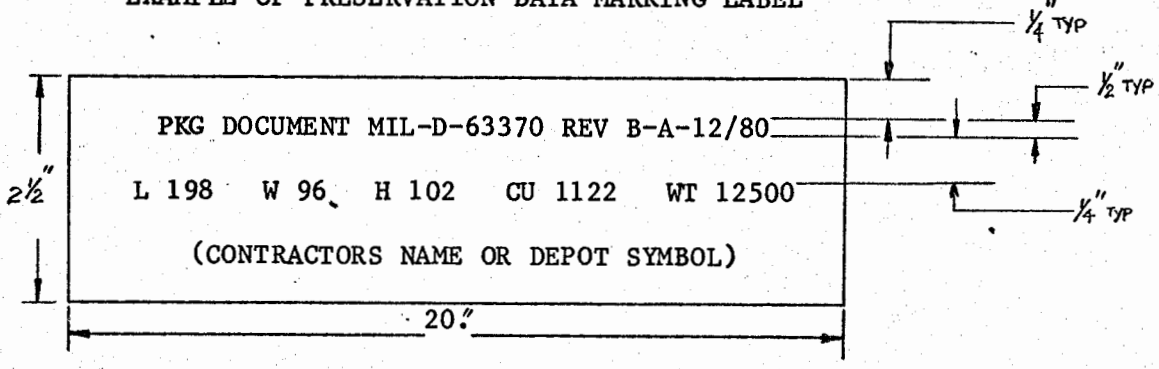


LINE ONE SHALL CONTAIN THE APPLICABLE PACKAGING DOCUMENT NUMBER, REVISION NO., LEVEL OF PACKAGING, MONTH AND YEAR OF PRESERVATION RESPECTIVELY

LINE TWO SHALL CONTAIN THE OUTSIDE LENGTH, WIDTH AND HEIGHT IN INCHES, OUTSIDE CUBE TO THE NEAREST FOOT AND GROSS WEIGHT TO THE NEAREST POUND

LINE THREE SHALL CONTAIN THE CONTRACTOR'S NAME OR DEPOT SYMBOL (ABBREVIATE WHEN NECESSARY)

EXAMPLE OF ADDRESS MARKING LABEL

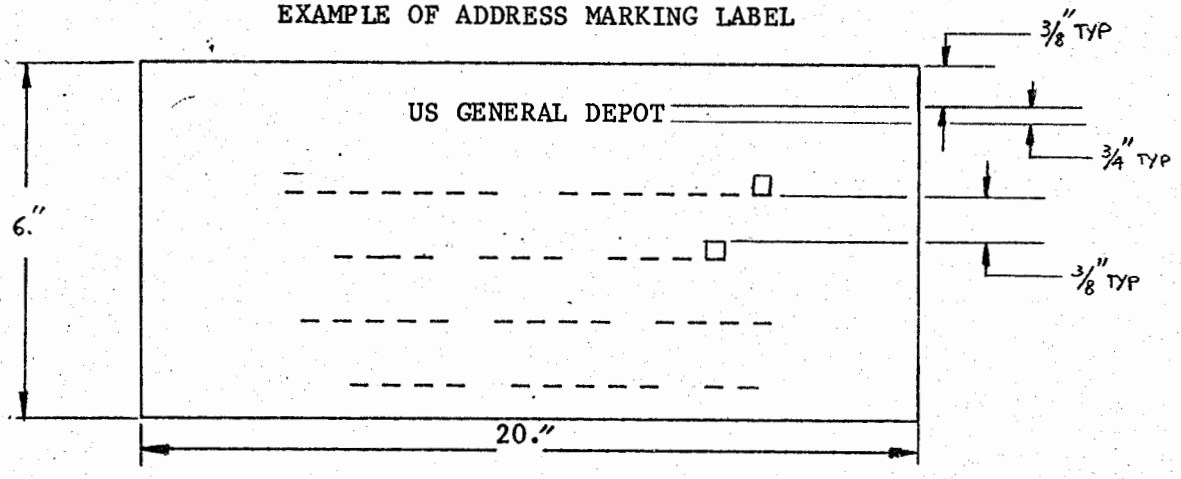

ADDRESS LABEL SHALL CONTAIN THE COMPLETE ADDRESS INDICATED ON THE SHIPPING ORDER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

3.4.2 Oversea Address Marking. Oversea address marking shall be printed or stenciled on separate pressure sensitive labels, six (6) inches high and twenty (20) inches wide. Marking shall be 3/4 inch high, shall be spaced as indicated on following example and shall be as specified in the shipping order. When space is not adequate to accommodate the complete address using 3/4 inch characters, marking size shall be reduced to 5/8 inch or 1/2 inch. Stenciling shall be waterproofed as in paragraph 3.4.1 f above.

3.4.3 Label Sizes. Label sizes shall be altered only when one or more of the following conditions exist:

a. If 6 x 20 inch address label is not large enough to accommodate specified marking, when using the minimum 1/2 inch lettering, label size shall be increased as required.

b. When unique configuration of the processed dispenser makes it impossible to find a suitable location for either or both of the labels of the prescribed dimensions, labels shall be altered as required to fit the available space. Labels shall be of appropriate size to accommodate the required stenciling.

c. Prior to using labels varying in size from the prescribed examples cited, samples shall be submitted for approval to US Army Armament Research and Development Command, Packaging Section.

3.4.4 Location of Marking Labels. CONUS shipment shall have one preservation data marking label applied on the rear or right side near the rear, on each dispenser and dispenser cover. Oversea shipments shall have one preservation data marking label and one address marking label, applied on the rear or right side near the rear, on each dispenser and dispenser cover. When possible, labels shall be positioned on the dispenser at a height of not more than six feet or less than four feet. When the above locations are not practical, the best alternate location shall be used.

3.4.5 Certification. Certification shall be furnished that labels supplied are National Decalcomania Corporation, "Mac Tac Film with MR-1 Adhesive", Minnesota Mining Vinyl Film #3470, or equal, and comply with the following additional requirements:

a. White material with black printing or stenciling.

b. Have been, or are capable of being printed, stenciled and waterproofed with the following:

1. Paint conforming to MIL-P-8793, or ink or paint certified by the manufacturer as equal, and compatible with label material used.

c. Labels furnished shall be capable of adhering to dispenser surface or cover material for one year and printing or stenciling shall retain its legibility for one year.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

d. After exposure in accordance with Method 6161 of Federal Test Method Standard No. 141, for one year in Florida or the equivalent, labels shall be removable from painted metal surface, without leaving adhesive residue or damaging the painted metal surface.

e. At the time labels are applied to the dispenser surface or cover, label and cover and vehicle surfaces shall have a minimum temperature of 60°F., or application shall be in accordance with the label manufacturer's recommendations.

3.5 Loading

3.5.1 Rail Shipment. Loading of the dispenser on open top single or multilevel railroad cars shall be in accordance with the applicable requirements of TM 55-1095-205-14, "Transportability Guidance, Dispenser, Mine: Ground Vehicle, M128". The quantity of units to be loaded on each railcar, the type of railcar, and the applicable transportation data shall be as authorized by the responsible Government transportation office (or officer).

3.5.2 Highway Shipment. Loading of dispenser for shipment by highway shall be in accordance with the applicable requirements of TM 55-1095-205-14, "Transportability Guidance, Dispenser, Mine: Ground Vehicle, M128".

3.5.3 Marine Shipment. (Unless otherwise specified) dispenser production contractor or rebuild activity is not responsible for this requirement; shiploading activities shall accomplish this requirement. Loading of dispenser for shipment by water shall be in accordance with the applicable requirements of TM 55-1095-205-14, "Transportability Guidance, Dispenser, Mine: Ground Vehicle, M128".

3.5.4 Air Shipment. Loading of the dispenser for movement by air shall be in accordance with the applicable requirements of TM 55-1095-205-14, "Transportability Guidance, Dispenser, Mine: Ground Vehicle, M128".

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First production dispenser. One of the first ten (10) production processed dispenser shall be subjected to the examinations specified in 4.4.2 and tested as specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

4 2.1 Rejection. Failure of the production processed dispenser, to conform to the requirements of 4.2, shall be cause for rejection and refusal to continue inspection/acceptance of dispensers by the Government until objective evidence has been provided by the contractor that corrective action has been taken to eliminate the conditions which caused rejection.

4.3 Production processed dispenser. Except as otherwise specified, the production processed dispensers shall be subjected to inspections as specified in 4.4.2 and tested as specified in 4.5.1.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. As applied to Government inspection of units of production, the term "lot" shall be in accordance with MIL-STD-105.

4.4.2 Examination. The examinations listed in the Classification of Defects paragraph 4.4.2.1 shall be performed on inspection lots as defined in 4.4.1. Unless otherwise specified in the Classification of Defects and Tests, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63370(AR)

PARAGRAPH	TITLE		SHEET 1 OF 4		DRAWING NUMBER
4.4.2.1	Processing Inspection				-
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Record forms missing, improperly completed, or stored.		1.0%	3.3.1	Visual
102	Painted surfaces not properly cleaned or repainted.		1.0%	3.3.2	Visual
103	Leveling jacks, lunette and side reflectors improperly secured, packed, or stored.		1.0%	3.3.4	Visual
104	Any on-vehicle-equipment (OVE) missing; parts not properly preserved, packed, or stored. Marking omitted or incorrect.		1.0%	3.3.5	Visual/manual
105	OVE wood box not positioned, or secured properly.		1.0%	3.3.5.1	Visual/manual
106	Any printed circuit card assy (CCA) for B.I.T.E./alarm control panel missing, not properly packed, or bags not properly sealed. Marking omitted or incorrect.		1.0%	3.3.6	Visual
107	CCA wood box not positioned and secured properly.		1.0%	3.3.6.1	Visual
108	Rubber tires improperly inflated or preserved.		1.0%	3.3.7	Visual/manual
109	Improper application or omission of preservatives.		1.0%	3.3.9	Visual
110	Cooling system improperly protected for storage or shipment. No warning tag.		1.0%	3.3.10 3.3.10.1 3.3.10.2	4.5.1/Visual-manual
111	Belt pulleys improperly protected; belts missing or improperly stored. No warning tag.		1.0%	3.3.11	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 4		DRAWING NUMBER
4.4.2.1	Processing Inspection (Continuation)				-
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
112	Engine crankcase improperly filled; improper type of lubricating oil or preservative spray.		1.0%	3.3.12 3.3.12.1	Visual
113	Fuel tank not drained or components improperly lubricated.		1.0%	3.3.13	Visual
114	Air restrictor of diesel engine improperly installed. Improper application or omission of preservative. Engine cranked excessively.		1.0%	3.3.14 3.3.14.1 3.3.14.2	Visual
115	Improper application or omission of preservative oil at air intake system.		1.0%	3.3.14.3	Visual
116	Exhaust system has improper application or omission of preservative oil; omission of or improper sealing. No warning tag.		1.0%	3.3.14.4	Visual
117	Air cleaner improperly sealed. Improper application or omission of preservative oil. No warning tag.		1.0%	3.3.14.5	Visual
118	Any engine electrical component openings not sealed or improperly sealed. No warning label.		1.0%	3.3.14.6	Visual
119	Cabinet warning tag improperly installed or omitted.		1.0%	3.3.14.7	Visual
120	Improper level, type or grade of oil, or insufficient operation for gearbox, pump drive, and rotary actuator.		1.0%	3.3.15	Visual
121	Improper application or omission of preservative oils for magazine reel drive chain, drive sprocket, and infeed conveyor drive chain.		1.0%	3.3.16	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 3 OF 4		DRAWING NUMBER
4.4.2.1	Processing Inspection (Continuation)				-
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
122	Improper application or omission of preservative oil for pinion gear, bearing-turn table, leveling jack, swivel and lock pin, trunnion axle, and wheel bearings.		1.0%	3.3.17	Visual
123	Improper level or type of fluid and insufficient operation for hydraulic reservoir and hydraulic system.		1.0%	3.3.18	Visual
124	Improper application or omission of preservative. Improper level or type of brake fluid. Improper draining, sealing or plugging. Valves not closed. No warning tag.		1.0%	3.3.19 3.3.19.1 3.3.19.2	Visual
125	Air lines, lighting cable, safety chains and wheel chocks improperly wrapped and taped. Connectors and hooks improperly secured.		1.0%	3.3.20	Visual
126	Batteries and cables improperly secured or sealed. Improper application or omission of preservative.		1.0%	3.3.21	Visual
127	Coolant heater and start aid assembly has improper application or omission of preservative. Fuel line improperly drained or sealed. No warning tag.		1.0%	3.3.22	Visual
128	Control panel and cables improperly secured.		1.0%	3.3.23	Visual
129	Launcher assembly improperly secured.		1.0%	3.3.25	Visual/manual
130	Markings omitted or incompleted. Incorrect label material or size.		1.0%	3.4 3.4.1 thru 3.4.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-63370(AR)

PARAGRAPH	TITLE		SHEET 4 OF 4		DRAWING NUMBER
4.4.2.1	Processing Inspection (Continuation)				-
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
131	Improper loading of the dispenser for shipment.		1.0%	3.5 3.5.1 thru 3.5.4	Visual
Minor					
201	Exterior surfaces improperly cleaned.		2.5%	3.3.8	Visual
202	Doors, covers, and panels improperly secured. Keys improperly stored.		2.5%	3.3.24	Visual/manual
203	Dispenser tarpaulin cover improperly installed or secured.		2.5%	3.3.26	Visual/manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection

4.5.1 Cooling system. Engine collant shall be tested using a solution testing hydrometer conforming to GG-T-250. Observation shall be made for compliance with 3.3.10.

5. PREPARATION FOR DELIVERY

This section is not applicable to this specification.

6. NOTES

6.1 Intended Use. This specification is intended to be used in conjunction with the implementing documents for the processing, marking, and inspection of the Dispenser, Mine: Ground Vehicle, M128 in accordance with MIL-D-63303(AR).


6.2 Ordering Data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. If engine crankcase oil is other than specified (see 3.3.12).

6.3 Repainting Requirements. (See 3.3.2). Repainting requirements are intended to apply only in those cases where the painting requirements of the end item specification (MIL-D-63303) would not otherwise be applicable, such as on separate packaging contracts, or in Government Depot operations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

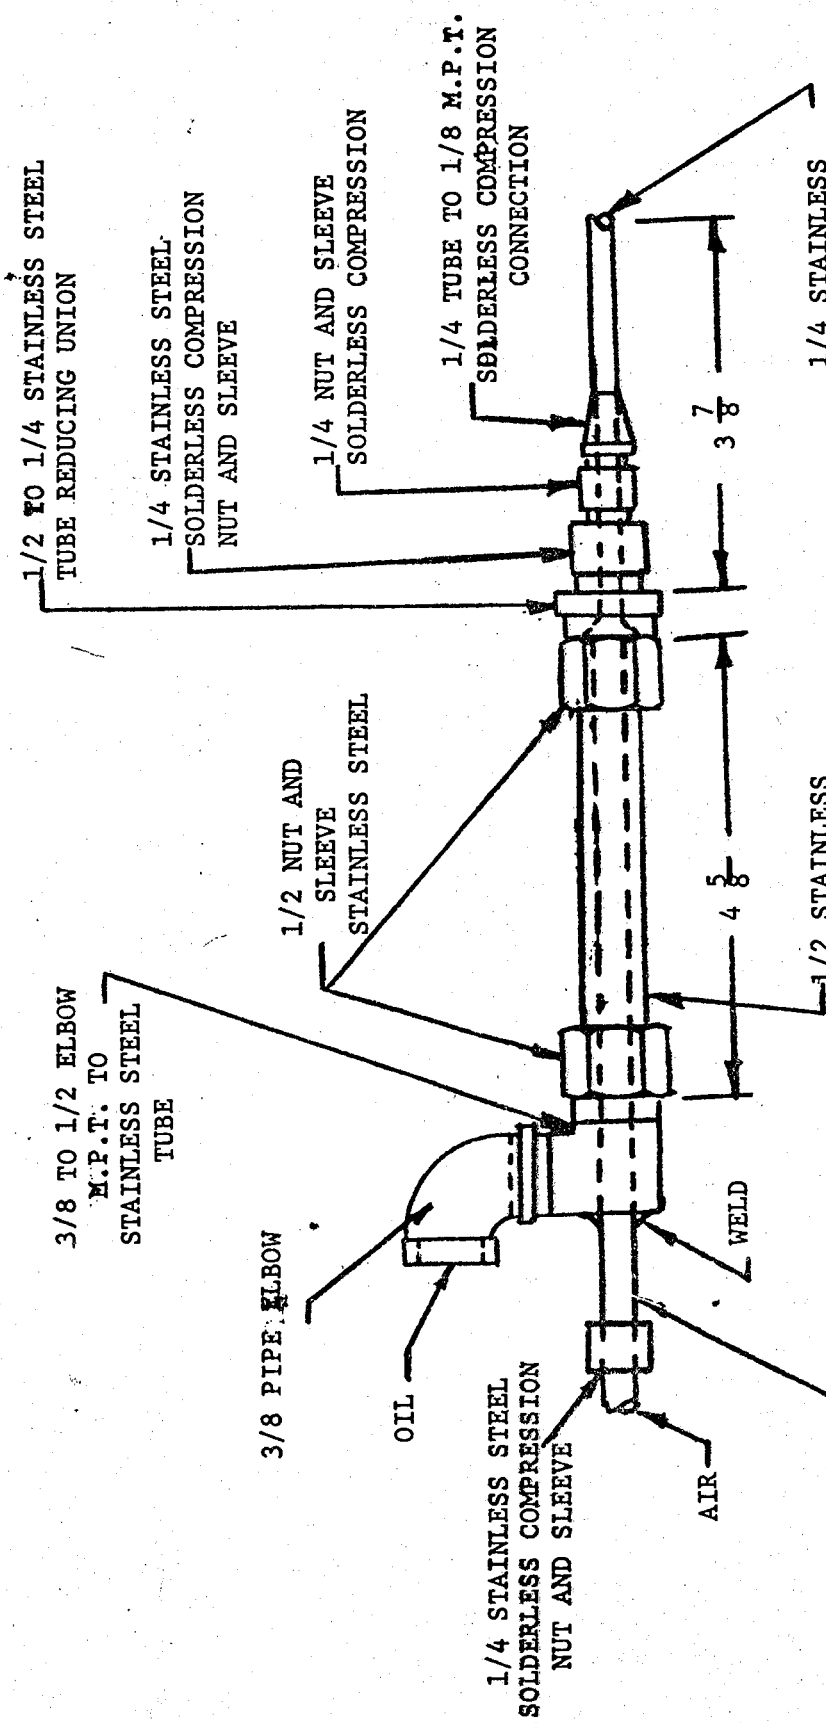

NOTE: ALL DIMENSIONS ARE IN INCHES

FIGURE 1. FABRICATION DETAILS FOR OIL SPRAY ATOMIZING NOZZLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

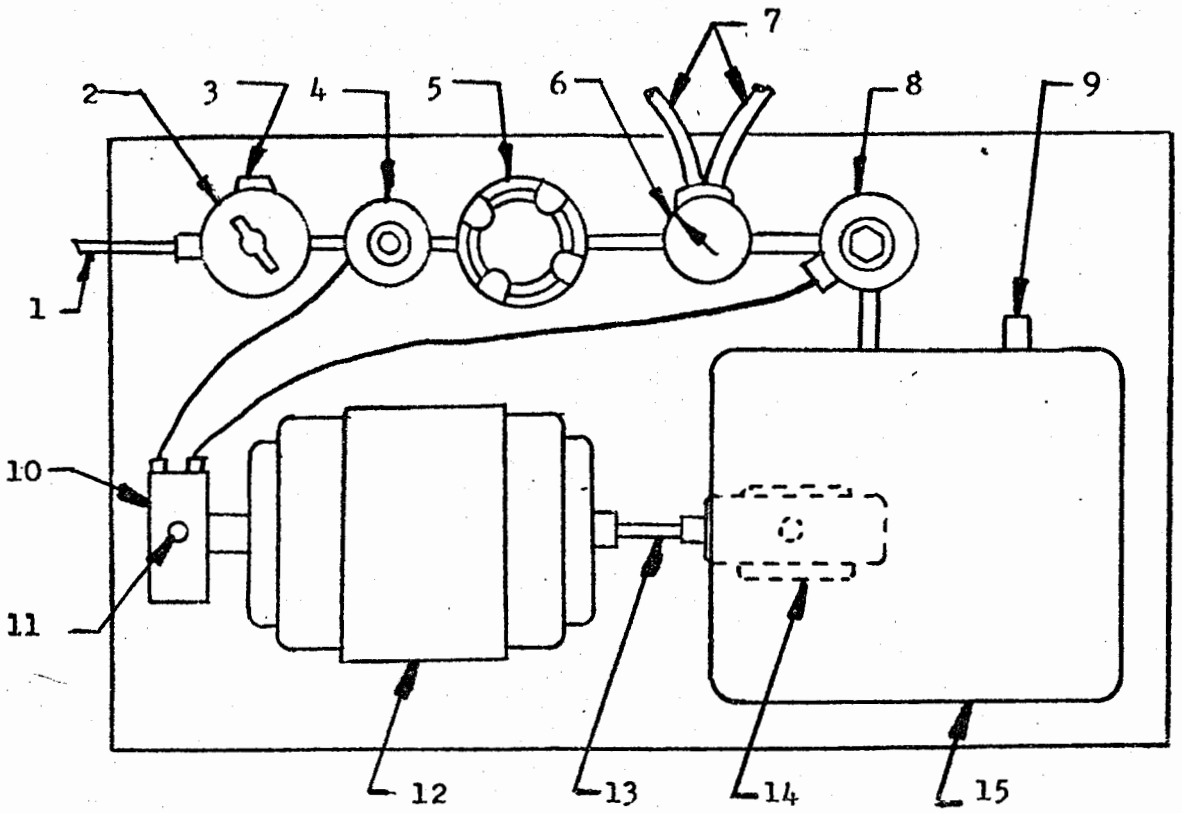

1. AIR LINE
2. AIR PRESSURE REGULATOR
3. AIR PRESSURE GAGE
4. SOLENOID VALVE
5. MOISTURE SEPARATOR
6. OIL PRESSURE GAGE
7. TWO DOUBLE TAPED LINES
8. SOLENOID VALVE
9. OIL TANK LEVEL GAGE
10. ELECTRIC JUNCTION BOX
11. ELECTRIC LINE
12. MOTOR, 1/4 H P
13. SHAFT
14. POSITIVE DISPLACEMENT OIL PUMP
15. OIL TANK

NOTE:

THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR PROCESSING ENGINE THRU SPARK PLUG OPENINGS IN CONJUNCTION WITH FIGURE 1

FIGURE 2. PRESSURE PUMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

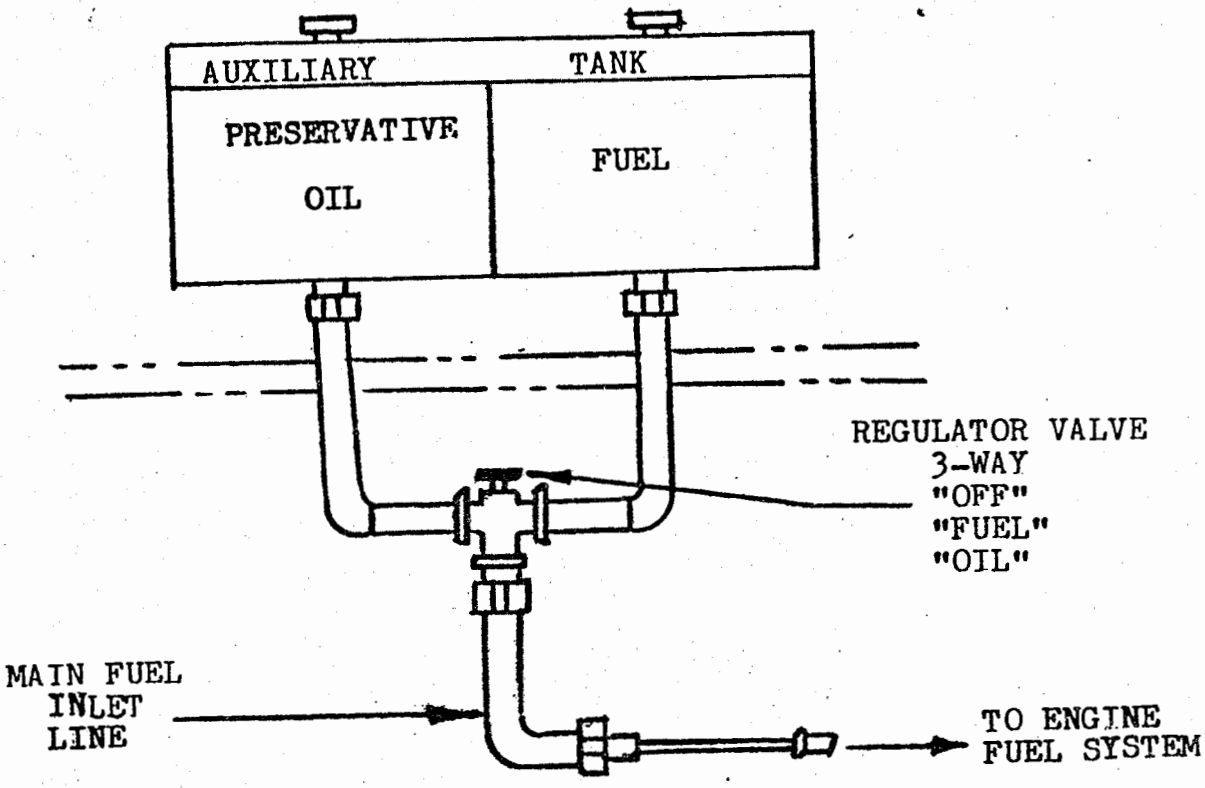
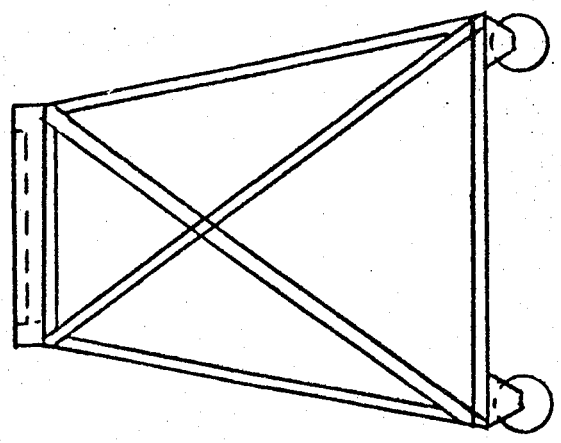
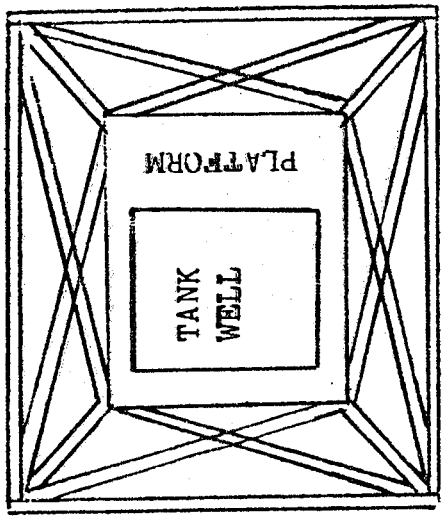


FIGURE 3. AUXILIARY FUEL CONTAINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.





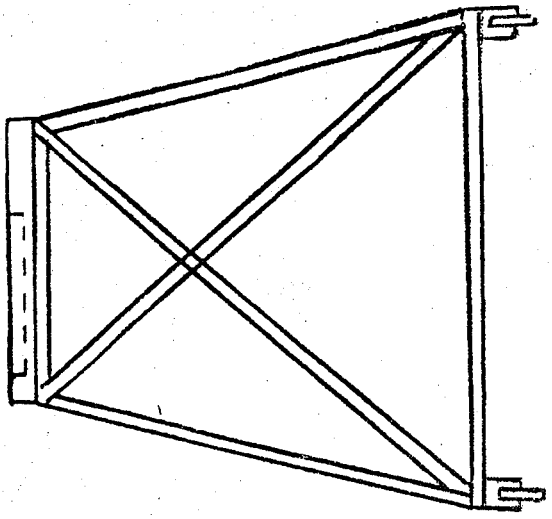


FIGURE 3. (Con't) CONTAINER SUPPORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

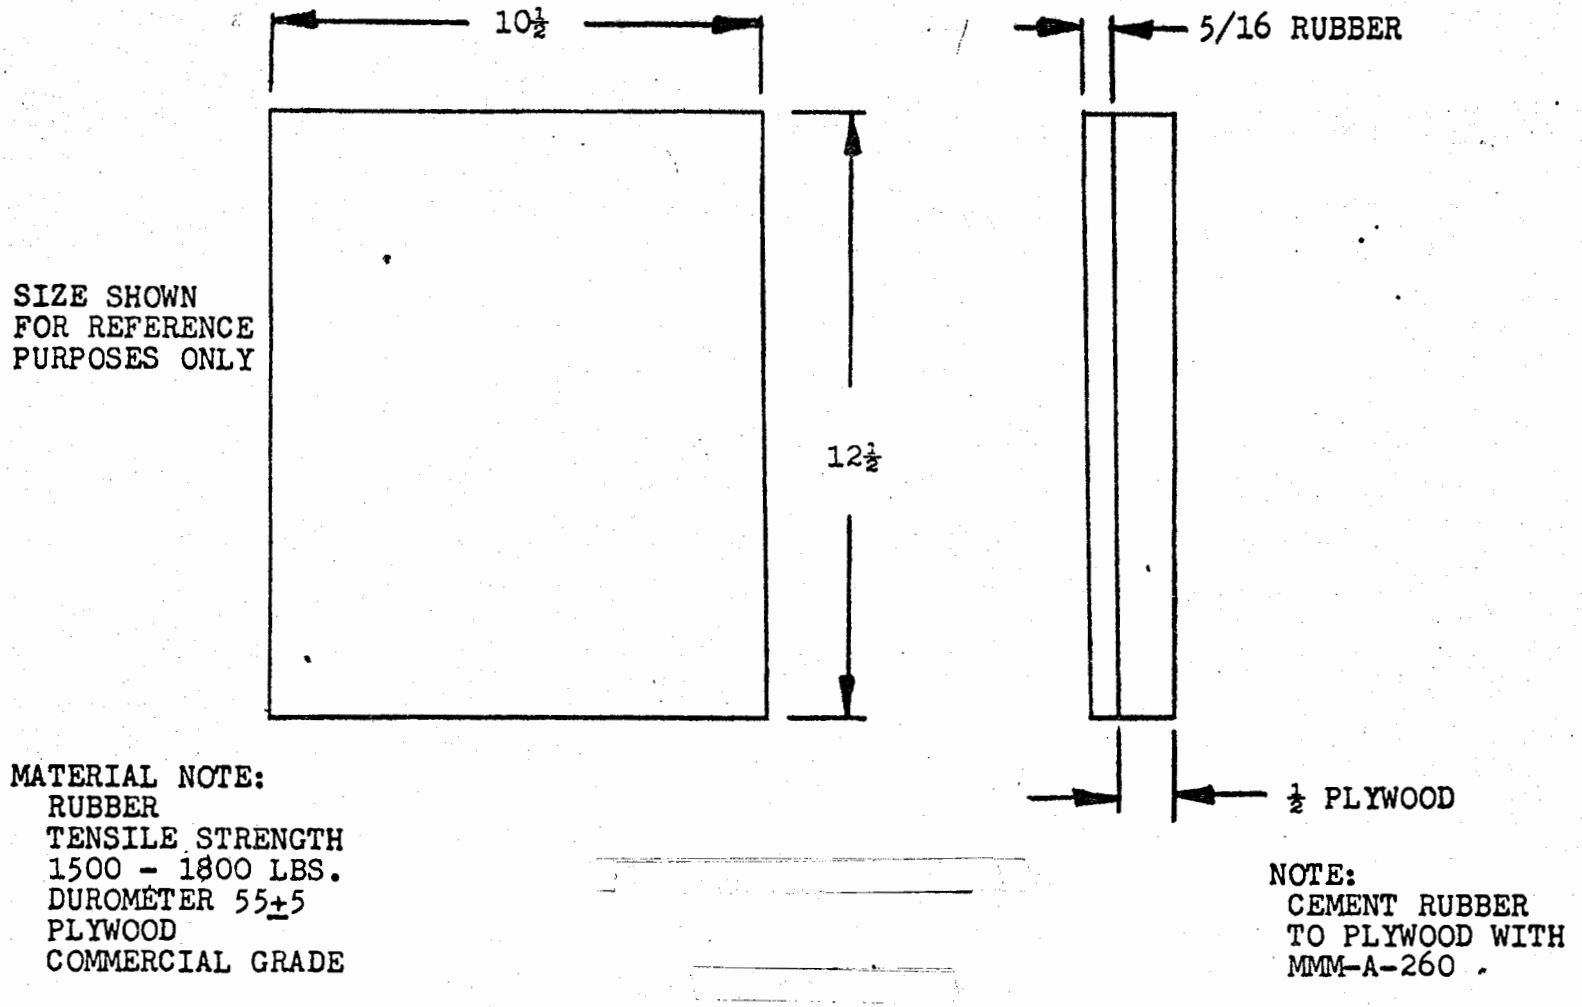


FIGURE 4. AIR RESTRICTOR PLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

PACKAGING MATERIAL


BOX, WOOD - CLASS 2, STYLE 4, PPP-B-621. EXCEPT TOP TO BE CONSTRUCTED FROM 1/2 IN. THICK, 5 PLY PLYWOOD, GRADE CD, BONDED WITH EXTERIOR GLUE, NN-P-530. OUTSIDE TO BE COMPLETELY PAINTED WITH ENAMEL, CAMOUFLAGE, COLOR FOREST GREEN NO. 34079, MIL-E-52798.
INSIDE DIMENSIONS: 38 1/2 X 15 7/8 X 5 1/4.

BOX, FIBERBOARD - TYPE CF, CLASS WEATHER RESISTANT, GRADE W6c, STYLE RSC, PPP-B-636.
INSIDE DIMENSIONS - FIRE EXTINGUISHER: 14 7/8 X 5 1/8 X 5. -SHACKLES (2): 7 X 4 5/8 X 5.
- RFLECTORS (4): 4 7/8 X 3 7/8 X 2 7/8. -MINE PIN ASSY: 16 1/4 X 2 3/8 X 2 3/8.

BAG, BARRIER - TYPE I, CLASS B, MIL-B-117. DIMENSIONS - BELTS: 10 X 18 MIN KEYS: 3 X 4 MIN.

FILLER - FIBERBOARD, WEATHER RESISTANT, PPP-F-320 AND/OR CUSHIONING, PPP-C-1797.

TAPE - PPP-T-76 FOR FIBERBOARD BOX.

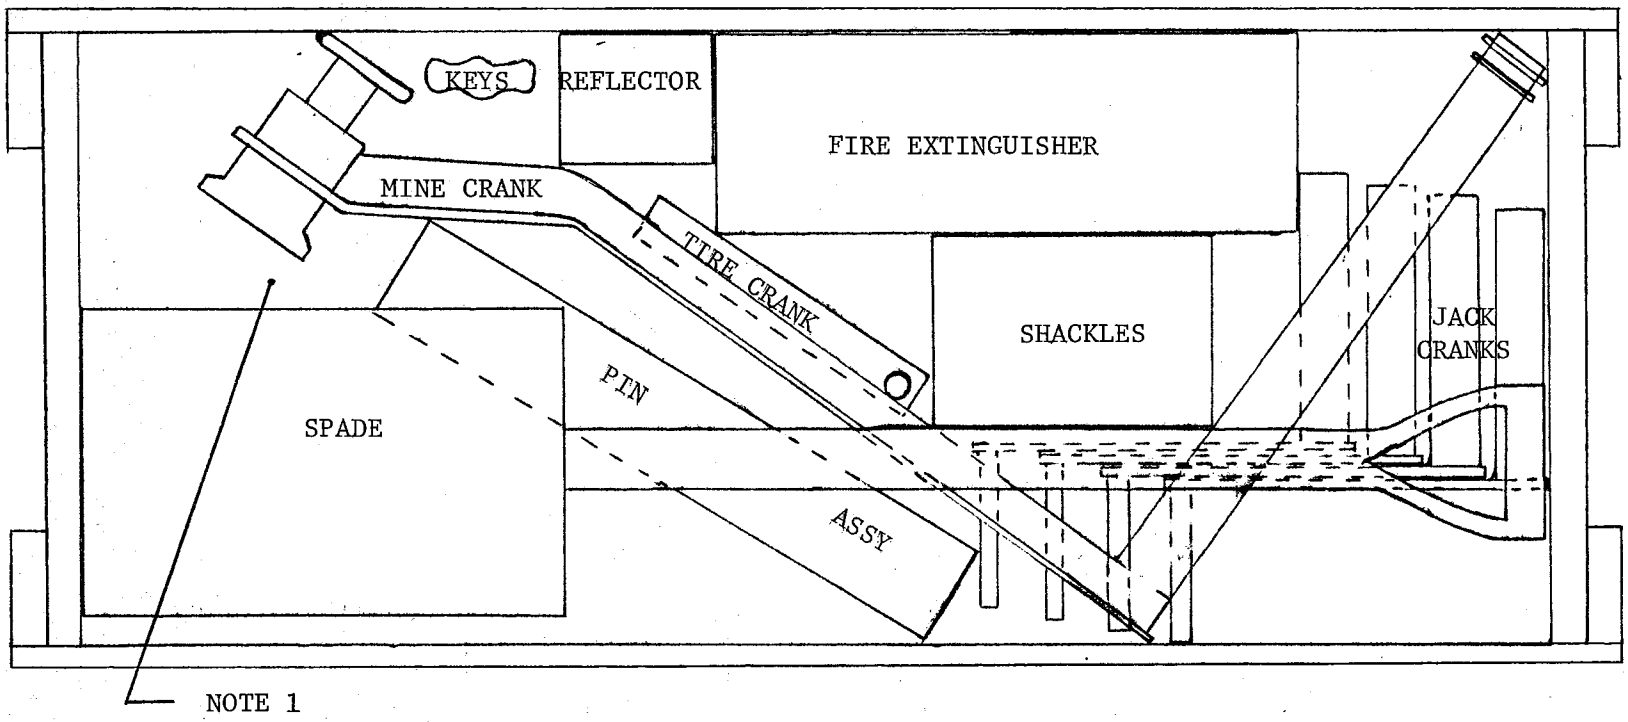

NOTE 1: TWO BELTS IN BAG, PACKED IN THIS AREA ON TOP OF SPADE AND CRANK. REMOVED FROM FIGURE FOR CLARITY.

FIGURE 5. PACKING CONFIGURATION FOR OVE WOOD BOX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

PACKAGING MATERIAL

CUSHIONS - POLYSTYRENE, FOAM, TYPE 1, 1. LB/CU FT DENSITY, MIL-P-60312.

DIMENSIONS - CUSHION 1: 8. X 3. X 5 1/4
2: 5. X 4. X 5 1/4 2 REQUIRED
3: 9. X 5 3/4 X 3.
4: 9. X 5. X 2 3/4
5: 7 1/2 X 4 1/4 X 3.

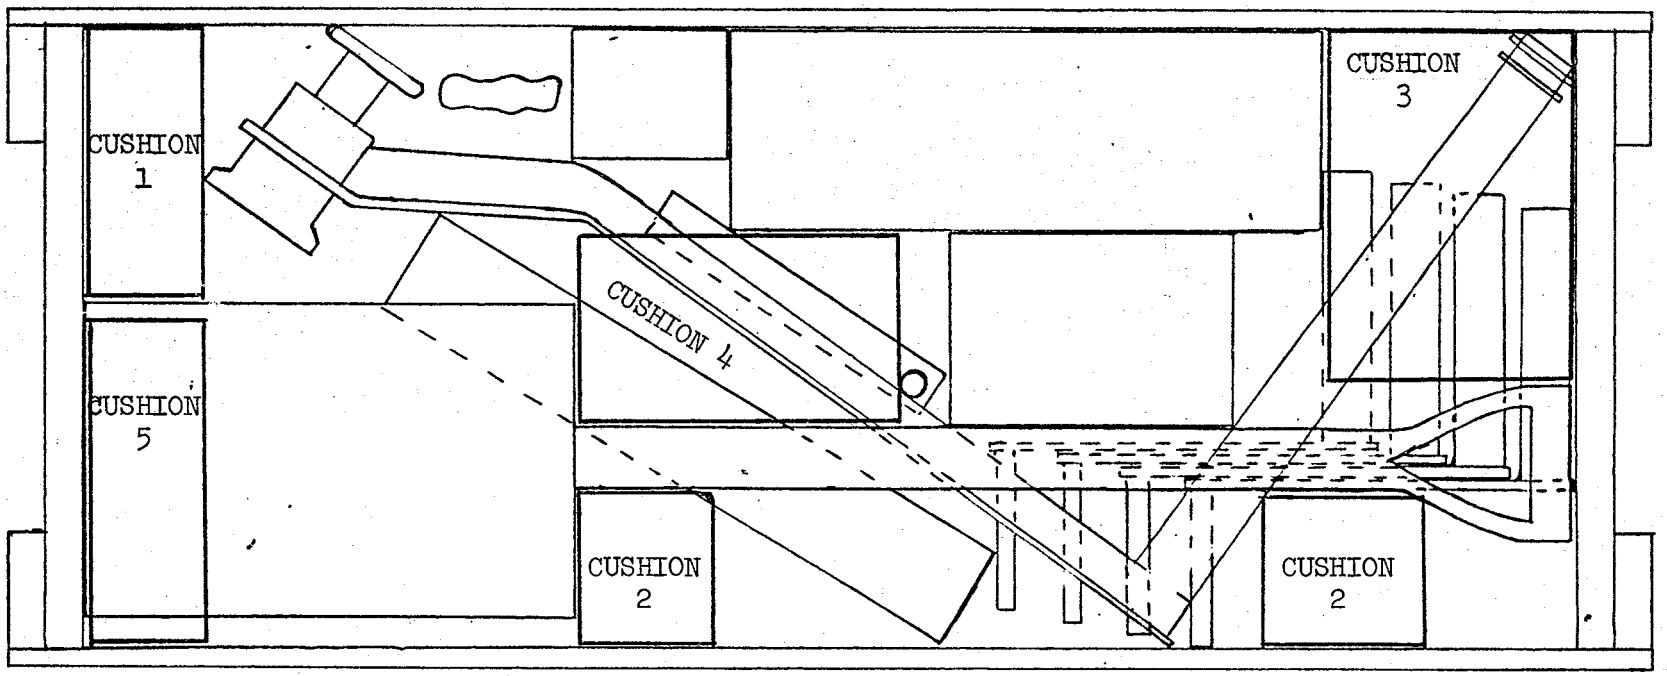


FIGURE 5. (Con't) PACKING CONFIGURATION FOR OVE WOOD BOX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

PACKAGING MATERIAL

BOX, WOOD - CLASS 2, STYLE 4, PPP-B-621. EXCEPT TOP TO BE CONSTRUCTED FROM 1/2 IN. THICK, 5 PLY PLYWOOD, GRADE CD, BONDED WITH EXTERIOR GLUE, NN-P-530. OUTSIDE TO BE COMPLETELY PAINTED WITH ENAMEL, CAMOUFLAGE, COLOR FOREST GREEN NO. 34079, MIL-E-52798.
INSIDE DIMENSIONS: 21 3/4 X 12 1/4 X 9.

BOX, FIBERBOARD - TYPE CF, CLASS WEATHER RESISTANT, GRADE W6c, STYLE OPF, PPP-B-636.
INSIDE DIMENSIONS: CARD ASSY 1, 5-16: 10 1/4 X 5 3/8 X 1. 13 REQUIRED
CARD ASSY 2, 3, 4: 10 1/4 X 5 3/8 X 1 1/4 3 REQUIRED
CARD ASSY 17: 7 3/4 X 7 3/4 X 1 1/8 1 REQUIRED

BAG, BARRIER - TYPE I, CLASS F, MIL-B-117. DIMENSIONS: 6 1/2 X 14. 16 REQUIRED
DIMENSIONS: 8 1/2 X 11 1/2 1 REQUIRED

WRAP - CUSHIONING, POLYPROPYLENE, PPP-C-1797. DIMENSIONS: 12 X 10 X 1/8 THICK 16 REQUIRED
DIMENSIONS: 16 X 7 1/2 X 1/8 THICK 1 REQUIRED

CUSHION - POLYURETHANE FOAM, TYPE 1, CLASS 2, 2. LB/CU FT DENSITY, MIL-P-26514.
DIMENSIONS - TOP & BOTTOM: 21 1/4 X 12 X 1. SIDES: 19 1/4 X 6 1/2 X 1. ENDS: 12 X 6 1/2 X 1.

TAPE - FOR WRAP: PPP-T-42 FOR FIBERBOARD BOX: PPP-T-76.

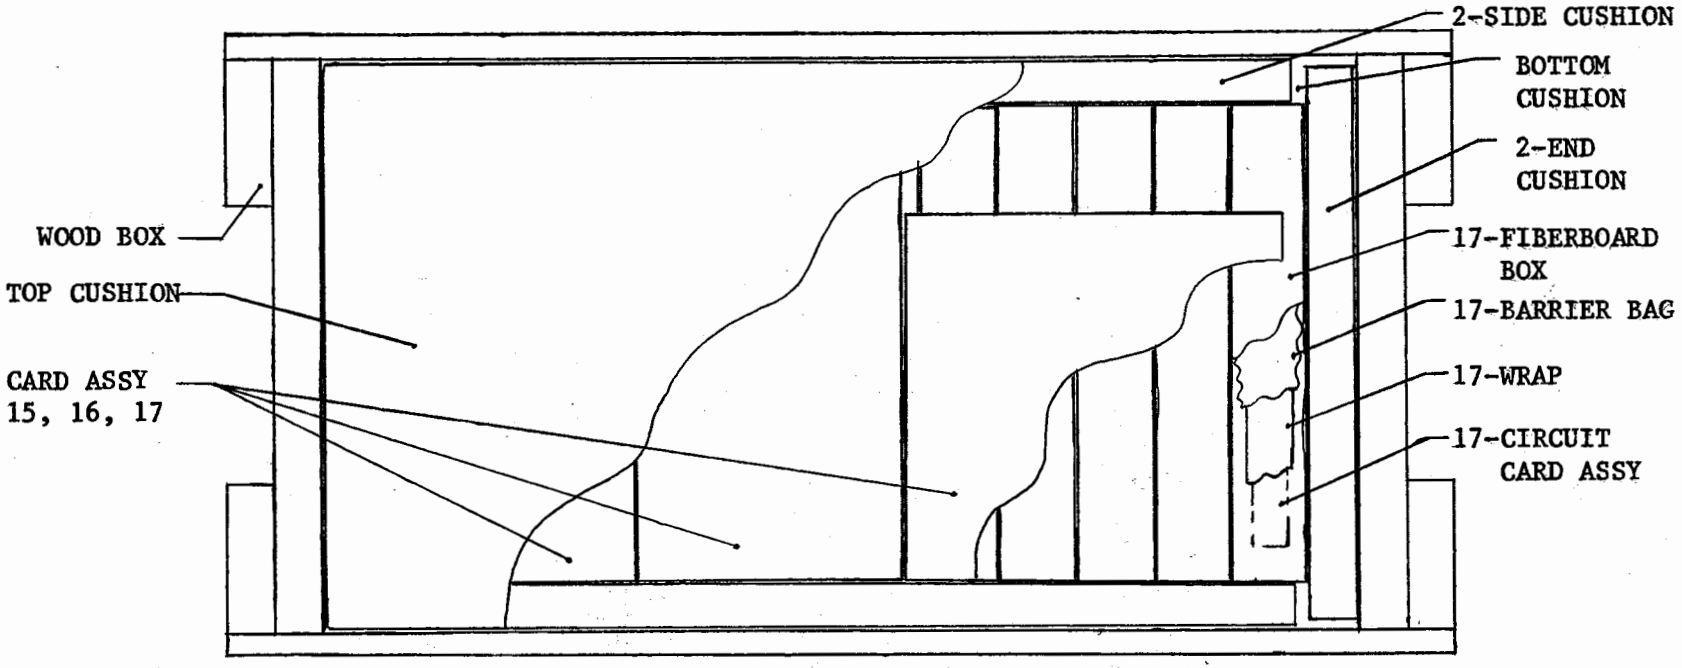


FIGURE 6. PACKING CONFIGURATION FOR PRINTED CIRCUIT CARDS WOOD BOX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project: 1095-A123

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.