MIL-G-52595C(ME)
3 March 1986
SUPERSEDING
MIL-G-52595B(ME)
13 June 1980

MILITARY SPECIFICATION

GIN POLE, BOLTED TANK ERECTION

This specification is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a gin pole for bolted tank erection.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specificationsand Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

FF-B-575	- Bolts, Hexagon and Square.
FF-N-836	- Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding and Single Ball Seat.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3950
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

QQ-A-225/8	- Aluminum Alloy Bar, Rod, Wire, and Special Shapes; Rolled, Drawn, or Cold Finished, 6061.
QQ-A-250/11	- Aluminum Alloy 6061, Plate and Sheet.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-T-60	- Tape: Packaging, Waterproof.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-25995	- Pipe, Aluminum Alloy, Drawn or Extruded.
MIL-C-46168	- Coating, Aliphatic Polyurethane, Chemical Agent Resistant.

STANDARDS

FEDERAL

FED-STD-H28	- Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimiliar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing with Appropriate Test Methods.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/AWS D1.2 - Structural Welding Code - Aluminum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 53 - Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
A 108 - Steel Bars, Carbon, Cold-Finished, Standard Quality.
A 575 - Merchant Quality Hot-Rolled Carbon Steel Bars.
D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY, INC., (AWS)

AWS B2.1 - Welding Procedure and Performance Qualification.

(Application for copies should be addressed to the American Welding Society, 550 NW Lejeune Road, P.O. Box 351040, Miami, FL 33135.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specifications sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The gin pole assembly, hereinafter referred to as "gin pole", shall be as shown on figure 1 and as specified herein, with a maximum capacity of 1000 pounds.

3.2 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 3.2.7).

3.2.1 Pipe.

3.2.1.1 Aluminum pipe. Aluminum pipe shall conform to MIL-P-25995, 6061-T6, schedule as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

3.2.1.2 Steel pipe. Zinc coated steel pipe shall conform to ASTM A 53, type S, grades A and B.

3.2.2 Plate. Aluminum plate shall conform to QQ-A-250/11, 6061-T6.

3.2.3 Rod. Aluminum rod shall conform to QQ-A-225/8, 6061-T6.

3.2.4 Bar. Carbon steel bar shall conform to ASTM A 575, grade M1010-M1020 or ASTM A 108, grade 1010-1029.

3.2.5 Bolts. Bolts shall conform to FF-B-575, type I, size as shown on figure 1.

3.2.6 Nuts. Nuts shall conform to FF-N-836, type I, style 1.

3.2.7 Recovered Material. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials as distinguished from virgin raw materials. The components, pieces and parts incorporated in the gin poles may be newly fabricated from recovered materials to the maximum extent practicable provided the gin poles produced meet all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the gin poles.

3.2.8 Material deterioration and control. The gin poles shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operation and storage environment to which the item may be exposed.

3.2.9 Dissimailar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.2.10 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent and shall make information available upon request to the contracting officer or designated representative.

3.3 Marking.

3.3.1 Identification marking. The gin poles shall be identified in accordance with MIL-STD-130.

3.3.2 Instruction plate. Each gin pole shall be equipped with an instruction plate conforming to MIL-P-514, type III, permanently affixed in a conspicuous place and shall state:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

"WARNING - MAXIMUM LOAD RATING - 1000 POUNDS"

3.4 Treatment and painting. The gin pole shall be treated and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2) top coat color shall be camouflage green 383 conforming to MIL-C-46168.

3.5 Workmanship.

3.5.1 Fabrication. Metal used in fabrication shall be free from kinks and sharp bends. Straightening of material shall be done by methods that will not cause damage to the material. Corners shall be true and square. Flame cutting of steel may be employed instead of shearing or sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. The gin pole shall be free from such defects as undercut welds and elongated or off-center holes. All external surfaces shall be free from burrs, sharp edges and corners, except where sharp edges or corners are required and are not detrimental to safety.

3.5.2 Welding. Surfaces of all parts to be welded shall be free from scale, corrosion, paint, grease, oxide film, and other foreign matter. All aluminum welding shall be done by the inert gas, shielded-arc method. Aluminum welds may be ground, filed, buffed or chipped but shall not be hammered and shall be free from discontinuities such as base metal cracks adjacent to or behind welds, cracks, in weld metal, undercutting of base metal, lack of fusion with parent metal or between parts, lack of weld penetration, lack of prescribed fit or weld spatter.

3.5.3 Welders. Before assigning any welder to welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder or welding operator has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

AWS B2.1 Welding Procedure and Performance Qualification.
ANSI/AWS D1.2 Structural Welding Code - Aluminum.

Contractors who only make horizontal welds need not qualify welders for "all position welding". Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with ANSI/ASME and ANSI/AWS codes. The certification shall be made available for review by the contracting officer or the contracting officer's representative. Contractors who make only horizontal welds need not qualify welders for "all position welding".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

3.5.4 Bolted connections. Boltholes shall be accurately formed and shall have all burrs removed. Flat washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All threads shall conform to FED-STD-H28. All fasteners shall be correctly torqued and shall have full thread engagement. Bolts shall protrude not more than 2 full threads.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. Quality conformance inspection (see 4.3).
b. Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined as specified in 4.4.1. AQL shall be 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The gin pole shall be examined as specified herein for the following defects:

Major.

101. Dimensions not as specified.
102. Material not as specified.
103. Bolts and nuts not as specified.
104. Materials not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

105. Dissimilar metals as defined in MIL-STD-889 not effectively insulated from each other.
106. Contractor does not have documentation available for identification of material, material finishes, or treatments.
107. Workmanship not as specified.
108. Aluminum and steel pipe not as specified.
109. Plate not as specified.
110. Rod not as specified.
111. Bar not as specified.
112. Used, rebuilt, or remanufactured components, pieces, or parts incorporated in the gin pole.
113. Fabrication not as specified.
114. Welding and welders certification not as specified.
115. Bolted connections not as specified.

Minor.

201. Identification marking missing, incomplete, or illegible.
202. Instruction plate missing or not as specified.
203. Treatment and painting not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completely processed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in acccordance with MIL-STD-105

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

116. Disassembly not as specified for level A or commercial.
117. Ends of gin pole not protected as specified for level A.
118. Hardware not preserved as specified for level A.
119. Preservation and packing not in accordance with the referenced document specified for commercial.
120. Box not as specified for level A or B.
121. Contents not immobilized within box as specified for level A or B.
122. Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Disassembly. The gin pole shall be disassembled to the maximum practicable extent.

5.2 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. The gin pole ends shall be protected from abrasion with tape conforming to PPP-T-60, type IV. The steel bolts, pins, and washers shall be coated with type P-1 preservative. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116. After the preservative has dried, loose hardware shall be preserved in accordance with MIL-P-116, method IC-3.

5.2.2 Commercial. Each complete gin pole shall be preserved in accordance with ASTM D 3951.

5.3 Packing. Packing shall be level A, B, or commercial, as specified (see 6.2).

5.3.1 Level A. Each complete disassembled gin pole, preserved as specified in 5.2, shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional. The contents shall be blocked, braced, and cushioned as applicable within the box in accordance with MIL-STD-1186. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.3.2 Level B. Each complete disassembled gin pole, preserved as specified in 5.2, shall be packed as specified in 5.3.1 except boxes shall be domestic type or class as applicable.

5.3.3 Commercial. Each complete disassembled gin pole shall be packed in accordance with ASTM D 3951.

5.4 Marking.

5.4.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.4.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D 3951 and in addition shall indicate the weight and cube on the shipping container.

6. NOTES

6.1 Intended use. The gin pole is intended for use in erection of military bolted-steel storage tanks.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Color gin pole is to be painted (see 3.4).
c. Degree of preservation and degree of packing required (see 5.2 and 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

6.3 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Review activities:
Army - AT
DLA - CS

Preparing activity:
Army - ME

Project 3950-A255

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

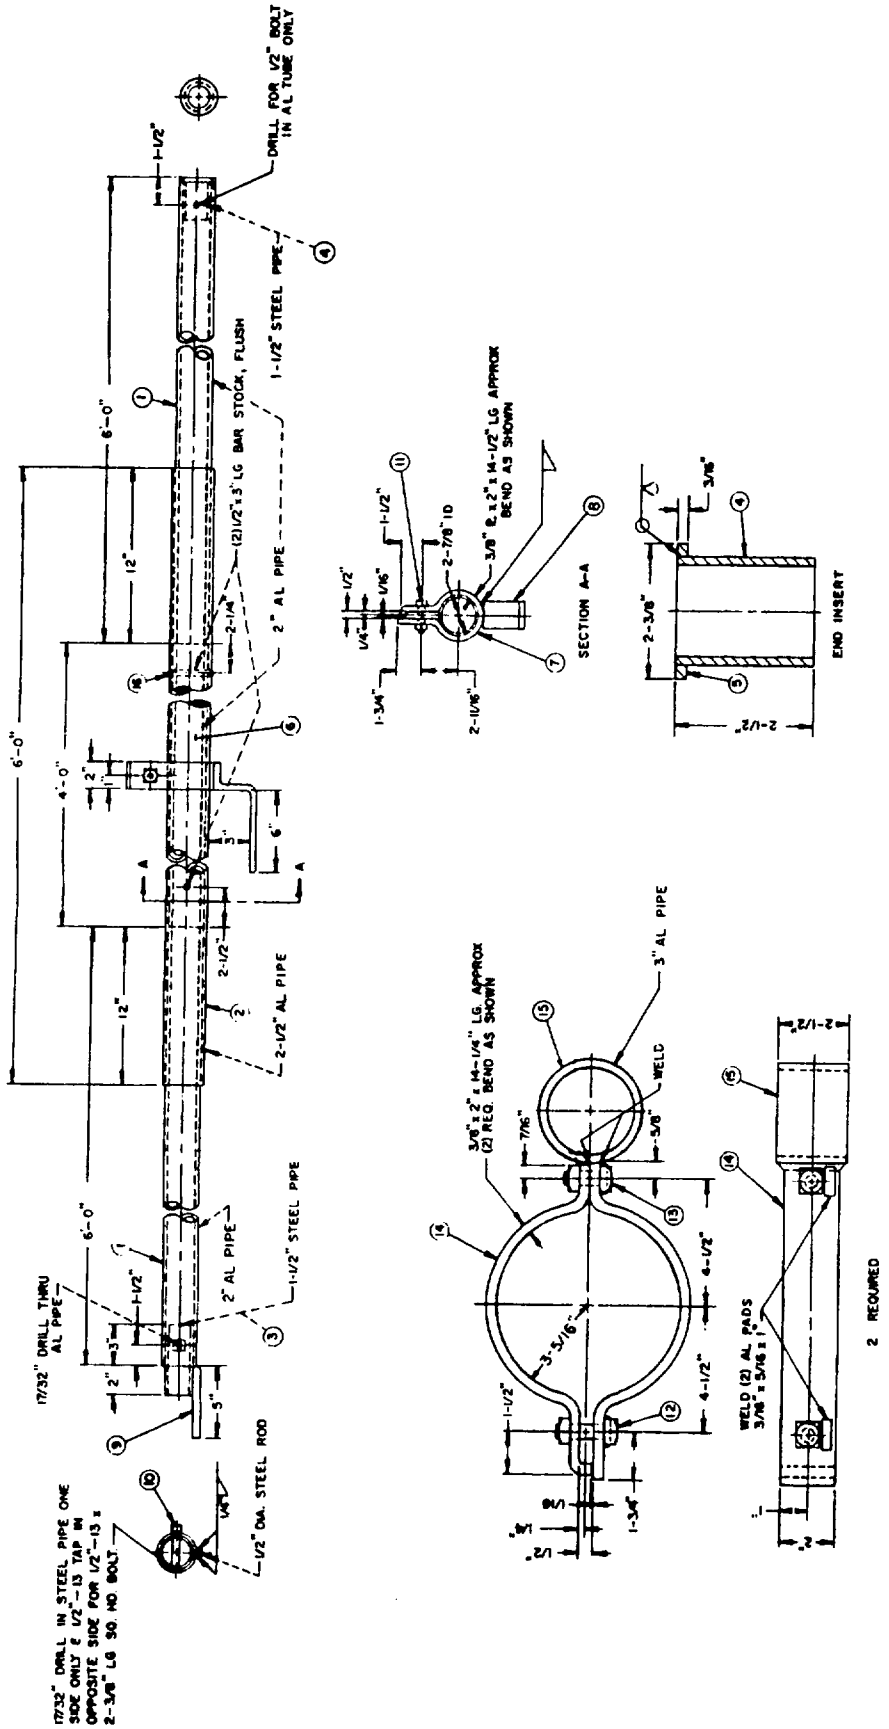

1.	2	PIPE, 2" x 6'-0" LONG, SCHEDULE 80	AL
2.	1	PIPE, 2-1/2" x 6'-0" LONG, SCHEDULE 40	AL
3.	1	PIPE, 1-1/2" DIA. x 5" LONG, SCHEDULE 40	STEEL
4.	1	PIPE, 1-1/2" DIA x 2-1/2" LONG, SCHEDULE 40	STEEL
5.	1	WASHER, 2-3/8" O.D. x 1-29/32" I.D. x 3/16" THICK	STEEL
6.	1	INSERT STOP, PIPE 2" x 4'-0" LONG, SCHEDULE 80	AL
7.	1	CLAMP, 3/8" PL x 2" x 14-1/2" LONG	AL
8.	1	CLAMP HANGER, 3/8" PL x 2" W. x 10-3/4" LONG	AL
9.	1	ANCHOR PIN, 1/2" DIA. x 5" LONG	STEEL
10.	1	BOLT, SQ.HD., 1/2-13 UNC, 2-3/8" LONG	STEEL
11.	1	BOLT, SQ.HD., 1/2-13UNC, 1-3/4" LONG W/SQ. NUT	STEEL
12.	1	BOLT, SQ.HD., 1/2-13UNC, 1-1/4" LONG W/SQ. NUT	STEEL
13.	1	BOLT, SQ.HD., 1/2-13 UNC, 1-1/4" LONG W/SQ NUT	STEEL
14.	2	CLAMPS STRAPS, 3/8" PL x 2" x 14-1/4" LONG	AL
15.	1	PIPE, 3" DIA., 2-1/2" LONG, SCHEDULE 40	AL
16	2	BAR STOCK, RD. 1/2" DIA. x 3" LONG	AL

FIGURE 1. Gin pole, bolted tank erection and adapter for mounting on tank center pole

X-9808

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-G-52595C(ME)	Gin Pole, Bolted Tank Erection

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:26Z
Check the source to verify that this is the current version before use.