INCH-POUND
MIL-PRF-62178B(AT)
25 March 1996
SUPERSEDING
MIL-P-62178A(AT)
18 March 1987

PERFORMANCE SPECIFICATION

# POWER PACKAGE: AVDS 1790-2C, 2CA, 2D OR 2DA ENGINE WITH CD850-6A OR 6A1 TRANSMISSION

This specification is approved for use within U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers four types of combat vehicle power packages consisting of a 12 cylinder, AVDS 1790 Engine, and CD850-6A or CD850-6A1 cross-drive transmissions. The difference between these four types of power packages is based on the electrical power supply and the addition of the clean air system.

1.2 Classification. The power package will be one of the types listed below:

Type I - Engine Model Number AVDS 1790-2D (Army Drawing 11684000) furnished with air-cooled generator and Transmission, Model Number CD850-6A or optional CD850-6A1.

Type II - Engine Model Number AVDS 1790-2C (Army Drawing 11682700) furnished with oil-cooled alternator and Transmission Model Number CD850-6A, or optional CD 850-6A1.

Beneficial comments (recommendations, additions,. deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000 by using the Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

AMSC N/A FSC 2815

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| Type III | - Engine Model Number AVDS 1790-2DA (Army Drawing 12314641) furnished with air-cooled generator and Transmission Model Number CD850-6A or optional CD850-6A-1, and the clean air system composed of the dust detector system and the dust ejector system. |
| Type IV | - Engine Model Number AVDS 1790-2CA (Army Drawing 12314611) furnished with oil-cooled alternator and Transmission Model Number CD850-6A or optional CD850-6A1, and the clean air system composed of the dust detector system and the dust ejector system. |

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| VV-F-800 | - Fuel Oil, Diesel. |

DEPARTMENT OF DEFENSE

| | |
|---|---|
| MIL-L-2104 | - Lubricating Oil, Internal Combustion Engine, Tactical Service. |
| MIL-T-11603 | - Transmission, Cross-Drive (CD850-6A). |
| | - Transmission, Cross-Drive (CD850-6A1). |
| MIL-L-21260 | - Lubricating Oil, Internal-Combustion Engine, Preservative and Break-In. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MIL-E-62177 | - Engine, Diesel, 12-cylinder, 90 degrees (E) V-Type 750 HP, AVDS-1790-2, -2A, -2C, -2CA, -2D, -2DA and -2DR. |
| MIL-L-46167 | - Lubrication Oil, Internal Combustion Engine, Arctic. |
| MIL-T-5624 | - Turbine Fuel, Aviation, Grades JP-4 and JP-5. |
| MIL-T-83133 | - Turbine Fuel, Aviation, Kerosene Type, Grade JP-8. |

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-129 - Marking for Shipment and Storage.

(Unless otherwise indicated, copies of the above specifications and standards are available from the Defense Printing Service Detachment Office, Bldg. 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Government drawings. The following Government drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

ARMY

Transmission

| | |
|---|---|
| 8351025 | - Transmission Side Oil Filler Kit (CD850-6A and -6A1). |
| 8355830 | - Transmission, Cross-Drive Basic (CD850-6A, M60A1). |
| 11650111 | - Transmission, Cross-Drive Basic (CD850-6A1, M60A1). |

Engine

| | |
|---|---|
| 11682700 | - Engine Assembly, Diesel (AVDS 1790-2C). |
| 11684000 | - Engine Assembly, Diesel (AVDS 1790-2D). |
| 12314611 | - Engine Assembly, Diesel (AVDS 1790-2CA). |
| 12314641 | - Engine Assembly, Diesel (AVDS 1790-2DA). |
| 12354310 | - Engine Assembly, Diesel w/Fording Kit (AVDS 1790-2DA). |
| 12354311 | - Engine Assembly, Diesel w/PTO Kit (AVDS 1790-2DA). |



Source: https://assist.dla.mil -- Downloaded: 202610-23T01:21Z
Check the source to verify that this is the current version before use.

| Power package | |
|---|---|
| 11655426 | - Engine and Transmission Assembly (AVDS 1790-2C P/P). |
| 11655501 | - Engine and Transmission Assembly (AVDS 1790-2CA P/P). |
| 12251996 | - Engine and Transmission Assembly (AVDS 1790-2D P/P). |
| 12314610 | - Engine and Transmission Assembly (AVDS 1790-2CA P/P). |
| 12314638 | - Engine and Transmission Assembly (AVDS 1790-2DA, M728, C.E.V.). |
| 12314639 | - Engine and Transmission Assembly (AVDS 1790-2DA, M48A5, AVLB). |
| 12314640 | - Engine and Transmission Assembly (AVDS 1790-2DA, M60A1, AVLB). |
| 12314750 | - Engine and Transmission Assembly (AVDS 1790-2CA P/P). |

(Application for copies should be addressed to the U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a first article sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Materials. Materials shall be in accordance with the manufacturer's materials specifications for four types of combat vehicle power packages. The materials shall be capable of meeting all of the operational and environmental requirements specified herein. Recovered materials shall be used to the maximum extent practicable (see 4.5.1).

3.3 Design and construction.

3.3.1 Configuration. Configuration construction shall conform to applicable drawings as follows listed in 3.3.1.1 through 3.3.1.5 (see 4.5.1 and 4.5.2).

3.3.1.1 Type I. The power pack shall be assembled in accordance with Drawing 12251996; the engine shall conform to Drawing 11684000.

3.3.1.2 Type II. The power pack shall be assembled in accordance with Drawing 11655426; the engine shall conform to Drawing 11682700.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

3.3.1.3 Type III. The power pack shall be assembled in accordance with Drawing Numbers 12314638, 12314639 or 12314640 as applicable. The engine shall conform to Drawings 12354310 or 12354311 as applicable.

3.3.1.4 Type IV. The power pack shall be assembled in accordance with the Drawing Number 11655501, 12314610 or 12314750 as applicable. The engine shall conform to Drawing 12314611.

3.3.1.5 Transmission. The transmission shall conform to Drawing No. 8355830 (CD850-6A) or 11650111 (CD850-6A1) with transmission oil filler kit Drawing No. 8351025.

3.3.2 Lubricants.

3.3.2.1 Engine. The engine crankcase shall be filled with approximately 16 gallons (to bring the oil level to the full mark on the dipstick) of lubricating oil in accordance with seasonal requirements of MIL-L-2104 and MIL-L-21260, type I [-10 to 115 degrees Fahrenheit (°F)] and MIL-L-46167 (-65 to 0°F) (see 4.5.3.1).

3.3.2.2 Transmission. The transmission shall be filled with approximately 20 gallons (to bring the oil level to the full mark on the dipstick) of oil conforming to grade 10 of MIL-L-2104 (0°F and above) and MIL-L-46167 (below 0°F) (see 4.5.3.2).

3.3.3 Governor. The engine governor shall be adjusted to limit the engine speed as follows:

| | |
|---|---|
| No Load Operation | 2600 to 2660 revolutions per minute (rpm) |
| Idle Speed | 675 to 725 rpm |

The governor shall be sealed after the above adjustment (see 4.5.4 h and i).

3.4 Performance.

3.4.1 Engine. The engine shall function and perform as specified herein, using fuel conforming to the seasonal requirements of specification VV-F-800 and lubricating oil as specified in 3.3.2.1 (see 4.5.4 and 4.5.5).

3.4.1.1 Type I. The engine with an air cooled generator shall perform as specified in MIL-E-62177, type IV.

3.4.1.2 Type II. The engine with an oil cooled alternator shall perform as specified in MIL-E-62177, type III.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

3.4.1.3 Type III. The engine with an air-cooled generator shall perform as specified in MIL-E-62177, type VII.

3.4.1.4 Type IV. The engine with an oil cooled alternator shall perform as specified in MIL-E-62177, type VI.

3.4.2 Transmission. The transmission shall function and perform as specified in MIL-T-11603, type III or type IV using lubricating oil as specified in 3.3.2.2 (see 4.5.4 and 4.5.5).

3.4.3 Speed stabilization. The engine speed shall stabilize within 30 seconds after full rack position is reached (see 4.5.4 h and i).

3.4.4 Idle speed. The engine shall idle smoothly without stalling at speeds of:

a. 675 to 725 rpm (low idle) (see 4.5.4.i).
b. 2600 to 2660 rpm (high idle) (see 4.5.4.h).

3.4.5 Stall speed. With the transmission in high range, its output shafts secured against rotation, and a converter out oil temperature between 250 and 270°F, the engine shall stall at a speed between 1850 and 2150 rpm when the fuel control is moved to the maximum position (see 4.5.5.c).

3.4.6 Electrical system.

3.4.6.1 Electrical function. The electrical system, including all wiring harness and all connections shall function properly during all phases of operation (see 4.5.5.g).

3.4.6.2 Type I and type III.

3.4.6.2.1 Generator. The engine and its wiring harness shall operate satisfactorily with an air cooled generator under a load of 300 to 325 amperes (A) at 28 volts (V) direct current (dc) (see 4.5.4.f).

3.4.6.3 Type II and type IV.

3.4.6.3.1 Alternator. The engine and its wiring harness shall operate satisfactorily with an oil cooled alternator under a load of 600 to 650 A at 28 V dc nominal (see 4.5.4.f).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

3.4.7 Leakage.

3.4.7.1 Oil and fuel leaks. After a power pack running time of 30 minutes, there shall be no visible evidence of fuel leakage. Oil leakage to the degree of droplet, from the engine, transmission, oil lines or fittings shall be acceptable (see 4.5.5.f and 6.4).

3.4.7.2 Generator air pressure (type I and III). The generator and associated components shall withstand an internal air pressure of 6 inches of Mercury. With the generator system pressurized to 6 inches of Mercury, leakage pressure loss in the system shall not exceed 4 inches of Mercury in 2.5 minutes (see 4.5.6).

3.4.8 Dust detector system (type III and IV). The dust detector system shall operate and indicate electrical continuity when the switches are induced to trip with the insertion of blocking shims at the filter strip positions and with the engine operating at high idle speed of 2600 to 2660 rpm (see 3.4.4.b). With the shims removed and the switches reset, continuity should not occur. Each switch shall be tested separately (see 4.5.4.h).

3.4.9 Vehicle exhaust dust ejector system (type III and IV). The engine mounted exhaust ejectors with the scavenge inlets plugged, shall produce a minimum of twelve (12) inches of water depression (gage reading) at the scavenge inlet plugs, when the power pack is operating at wide open throttle stall speed, minimum 1850 rpm (see 3.4.5), and with a maximum of four (4) inches of water static exhaust back pressure, measured at exhaust outlet (see 4.5.5.c).

3.5 Marking. Unless otherwise specified, identification and marking shall be in accordance with MIL-STD-129 (see 4.5.7).

3.6 Workmanship. Workmanship shall be such as to provide a power package, including accessories, equipment, and loose parts, free from defects, such as: cracked, dented, loose, broken, or corroded parts/components; burrs/sharp edges; scratched finish/peeled or blistered paint; fuel and oil leaks (see 4.5.2).

4. VERIFICATION

4.1 Classification of inspection:

a. First article inspection (see 4.3).
b. Quality conformance inspections (see 4.4).
   1. Examination (see 4.4.1).
   2. Tests (see 4.4.2.1).



Source: https://assist.dla.mil -- Downloaded: 2026l0-23T01:21Z
Check the source to verify that this is the currentversion before use.

4.2 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be conducted under the following conditions:

a. Air temperature 75 ± 25°F.
b. Barometric pressure 28.5 ± 3 inches mercury (Hg).

4.3 First article inspection. Unless otherwise specified (see 6.2), the Government shall select one power package produced under the production contract (see 6.2) for first article inspection. First article samples shall be inspected as specified in table I. Approval of the first article sample by the Government shall not relieve the contractor of his obligation to supply power packages that are fully representative of those inspected as a first article sample. Any changes or deviation of the production units from the first article sample shall be subject to the approval of the contracting officer.

4.3.1 First article inspection failure. Test item deficiencies during, or as a result of, the first article test, shall be cause for rejection of the items until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiency. Any deficiency found during, or as a result of the first article test, shall be evidence that all items already produced prior to the successful completion of the first article test are similarly deficient unless evidence satisfactory to the contracting officer is furnished by the contractor that they are not similarly deficient. Such deficiencies on all items shall be corrected by the contractor at no cost to the Government. The Government shall not final accept products until first article testing is successfully completed to the satisfaction of the Government.

4.4 Quality conformance inspection.

4.4.1 Quality conformance examination. Each power pack shall be examined for the defects listed in table II.

4.4.1.1 Classification of defects. For examination purposes, defects shall be classified as listed in table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of inspections.

| Title | Requirement | Inspection | First article | Quality Conformance | |
|---|---|---|---|---|---|
| | | | | Examination | Tests |
| Design and construction | 3.3 thru 3.3.1.5 | 4.5.1 | X | | X |
| Defects (see table II) | 3.3 thru 3.3.1.5 and 3.6 | 4.5.2 | X | X | |
| Engine | 3.3.2.1 | 4.5.3.1 | X | | X |
| Transmission | 3.3.2.2 | 4.5.3.2 | X | | X |
| Governor | 3.3.3 | 4.5.4 (h & i) | X | | X |
| Speed stabilization | 3.4.3 | 4.5.4 (h & i) | X | | X |
| Idle speed | 3.4.4 | 4.5.4 (h & i) | X | | X |
| Stall speed | 3.4.5 | 4.5.5 (c) | X | | X |
| Electrical function | 3.4.6.1, 3.4.6.2.1 & 3.4.6.3.1 | 4.5.5 (g) 4.5.4 (f) | X | | X |
| Oils and fuel leaks | 3.4.7.1 | 4.5.5 (f) | X | | X |
| Generator air pressure leakage | 3.4.7.2 | 4.5.6 | X | | X |
| Dust detector system | 3.4.8 | 4.5.4 (h) | X | | X |
| Vehicle exhaust dust ejector | 3.4.9 | 4.5.5 (c) | X | | X |

TABLE II. Classification of defects.

| Category | Defect | Method of examination |
|---|---|---|
| 101 | Oil leaks (see 3.4.7 and 6.4). | Visual |
| 102 | Fuel lines and brackets (see 3.4.7) damaged or missing. | Visual & Functional |
| 103 | Governor not sealed (see 3.3.3). | Visual |
| 104 | Accessories, missing or malfunctions (see 3.3.1). | Visual & Functional |
| 105 | Governor controls improperly installed, loose (see 3.3.3). | Visual & Functional |
| 106 | Minor assemblies, omitted (see 3.3.1). | Visual |
| 107 | Workmanship, faulty (see 3.6). | Visual |



Source: https://assist.dla.mil -- Downloaded: 202640-23T01:21Z
Check the source to verify that this is the current version before use.

4.4.2 Quality conformance tests.

4.4.2.1 Tests. Each power pack assembly shall be subjected to the tests specified in table I.

4.4.2.2 Failure. Failure of any power pack assembly to pass any of the specified examinations or tests shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

4.5 Methods of inspection.

4.5.1 Materials and construction. Conformance to 3.2 through 3.3.1.5, shall be determined by inspection of contractor records providing proof or certification that design, construction, processing, and materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications.

4.5.2 Defects. Examination for defects and conformance to 3.3 thru 3.3.1.5 and 3.6 shall be determined by examination for the defects listed in table II. Examination shall be visual, tactile, or by measurement with standard inspection equipment.

4.5.3 Lubricants.

4.5.3.1 Engine crankcase. To determine conformance to 3.3.2.1, the oil level shall be checked with the engine idling (675-725 rpm) and oil added if required to adjust the level within the "add/full" range marking.

4.5.3.2 Transmission. To determine conformance to 3.3.2.2, the oil level shall be checked with the engine idling (675-725 rpm) and oil added if required to adjust the level within the "add/full" range marking.

4.5.4 Governor and idle speeds. To determine conformance to 3.3.3, 3.4.1, 3.4.2, 3.4.4, and 3.4.8 the power pack shall be operated as follows:

a. Bleed the fuel-water separator to remove trapped air.
b. Crank the engine several revolutions with the fuel shut-off switch in the "OFF" position to make certain the engine is not hydrostatically locked and is otherwise free.
c. Turn on the master switch.
d. Start the engine with the transmission in neutral by operating the electric starting motor while slightly depressing the fuel control.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

e. If oil pressure does not reach 30 pounds per square inch (psi) within 20 seconds, STOP THE ENGINE IMMEDIATELY BY HOLDING THE FUEL SHUT-OFF SWITCH IN THE "OFF" POSITION. Determine the cause of low oil pressure.
f. Operate the engine at 1000 to 1200 rpm with the transmission in neutral for 5 minutes. During this period check the alternator or generator for charging (see 3.4.6.2.1 and 3.4.6.3.1).
g. Run the engine for five (5) minutes at 2000 rpm with the transmission in neutral. Check the engine and transmission sending units.
h. Check the governor high idle cut out and the dust detecting system at 2660 rpm (see 3.3.3, 3.4.4, and 3.4.8).
i. Check the engine low idle speed at 675 to 725 rpm (see 3.3.3 and 3.4.4). Adjust governor if required. Seal governor.
j. Stop engine with electric fuel shut-off solenoid.

4.5.5 Stall speed. To determine conformance to 3.4.1, 3.4.2, 3.4.5, 3.4.6.1, 3.4.7.1, and 3.4.9, the power pack shall be operated as follows:

a. Secure the two transmission output shafts against rotation.

CAUTION. DO NOT ATTEMPT ENGINE STARTS UNLESS THE FUEL SHUT-OFF SOLENOID IS CONNECTED AND ASCERTAINED TO BE OPERATIVE. ALSO ASCERTAIN THAT THE MANUAL FUEL SHUT-OFF VALVE IS CONNECTED AND OPERATIVE. DO NOT OPERATE THE STARTING MOTOR CONTINUOUSLY FOR MORE THAN 30 SECONDS. ALLOW A 2 MINUTE COOL-OFF PERIOD BEFORE RE-ENERGIZING THE STARTER.

b. Start the engine with the transmission in neutral, observing the above cranking precautions and the fuel shut-off (manual and electrical) precautions.
c. Run the engine for 5 minutes at 2000. Return to 700-800 and shift into high range. Advance the engine fuel control to the maximum position. Read the stall speed at a converter-out oil temperature of 250 to 270°F and check the exhaust ejector depression pressure. Reduce the fuel control setting and shift into neutral range.
d. If necessary, repeat Item c, two or three times (not more than three times) as required to get the required stall speed at the converter-out oil temperatures of 250 to 270°F.
e. Idle the engine at 675 to 725 rpm for 10 minutes.
f. Stop the engine with the electric fuel shut-off solenoid valve. Inspect for oil and fuel leaks, etc., and remove test fittings (see 3.4.7.1).
g. Start the engine and run at 2000 rpm in neutral for ten (10) minutes. Check the wiring harness (see 3.4.6.1).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z .
Check the source to verify that this is the current version before use.

NOTE. Do not run the engine at full throttle in high range for more than 30 consecutive seconds. Do not exceed 300°F converter-out oil temperature.

4.5.6 Generator air pressure (type I and III). To determine conformance to 3.4.7.2, with air tight closures installed at both inlet and outlet ends of the generator cooling ducts and with 6 inches of mercury applied internal air pressure, the time for air pressure drop from 6 to 2 inches of mercury shall be as specified.

4.5.7 Marking. To determine conformance to 3.5, the power package shall be given a thorough visual examination.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This power pack is an assembly and becomes a component of a vehicle in production. The power pack is not furnished to the Government as a spare or replacement part for service or for entry into the military supply system.


6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).
c. If first article samples are required (see 3.1).
d. If inspection conditions shall be other than as specified (see 4.2).
e. If first article inspection is required (see 4.3).
f. Packaging requirements (see 5.1).
g. Power package type; applicable drawing no., title, date, part number (see 6.3).



Source: https://assist.dla.mil -- Downloaded: 202610-23T01:21Z
Check the source to verify that this is the current version before use.

6.3 Part or identifying number (PIN). The PINs to be used for power package acquired to this specification are created as follows:

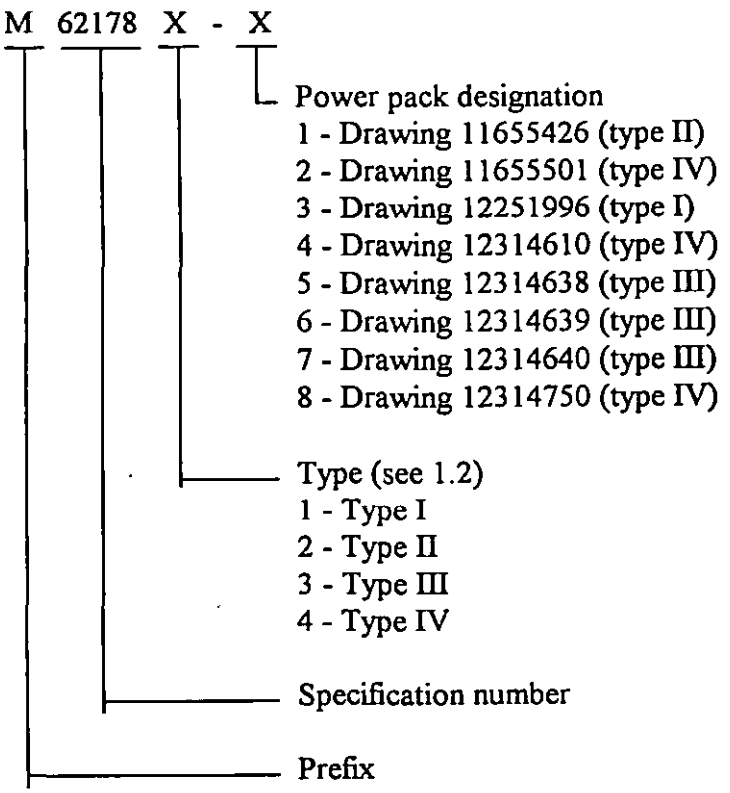


6.4 Leakage definitions. The following definitions will be used for the classification of defects for leakage (see 4.4.1.1):

a. Weep. Slight loss of fluid which causes staining or discoloration of surfaces (usually dry to the touch).
b. Seep. Any recurring evidence of fluid that does not result in the formation of a droplet (usually moist to the touch).
c. Droplet. Loss of fluid which forms no more than one drop per hour.
d. Leak. Loss of fluid which forms more than one drop per hour.

The term "drop" is defined as a volume of fluid equal to .05 cubic centimeter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

6.5 Subject term ( key word) listing.

Alternator
Crankcase
Diesel
Generator
Governor

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to extensiveness of the changes.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 2815-0169)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | MIL-PRF-62178B(AT) | 960325 |

3. DOCUMENT TITLE
Power Package: AVDS 1790-2C, 2CA, 2D or 2DA Engine With CD850-6A or 6A1 Transmission

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code)<br>(1) Commercial | (2) AUTOVON |
|---|---|---|
| | (810) 574-8745 | 786-8745 |
| c. ADDRESS (Include Zip Code)<br>Commander<br>U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:21Z
Check the source to verify that this is the current version before use.