
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED MICA DIELECTRIC, HIGH RELIABILITY

STYLE CMS04

This specification sheet is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-87164.

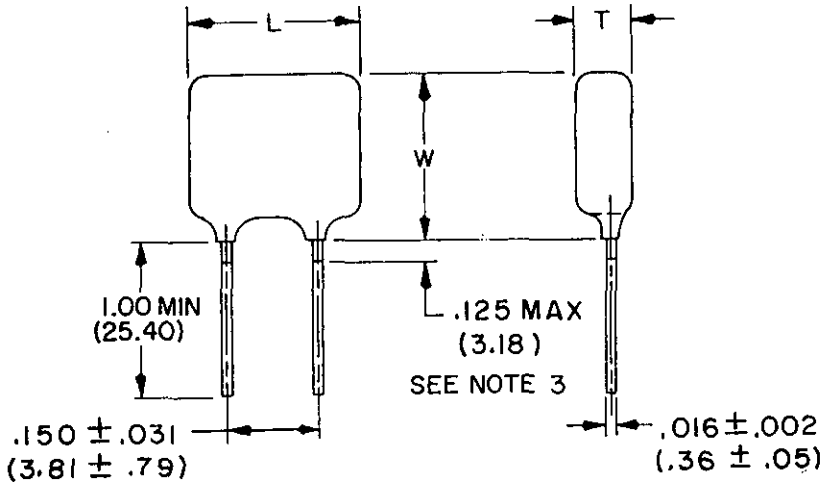



CIRCUIT DIAGRAM

TABLE I. Dimensions

Capacitance (pF)	L		T		W
	Min 1/	Max	Min 1/	Max	Max
1 to 24, incl.	.300(7.62)	.370(9.40)	.100(2.54)	.190(4.83)	.350(8.89)
27	.300(7.62)	.370(9.40)	.100(2.54)	.190(4.83)	.350(8.89)
30 to 68, incl.	.300(7.62)	.380(9.65)	.100(2.54)	.200(5.08)	.350(8.89)
75	.300(7.62)	.380(9.65)	.100(2.54)	.210(5.33)	.360(9.14)
82	.300(7.62)	.380(9.65)	.100(2.54)	.210(5.33)	.360(9.14)
91 & 100	.300(7.62)	.390(9.91)	.100(2.54)	.210(5.33)	.370(9.40)
110 & 120	.300(7.62)	.390(9.91)	.100(2.54)	.220(5.59)	.380(9.65)
130	.300(7.62)	.390(9.91)	.100(2.54)	.220(5.59)	.380(9.65)
150 & 160	.300(7.62)	.390(9.91)	.110(2.79)	.220(5.59)	.380(9.65)
180	.300(7.62)	.390(9.91)	.120(3.05)	.220(5.59)	.380(9.65)
200	.300(7.62)	.390(9.91)	.120(3.05)	.220(5.59)	.380(9.65)

1/ Minimum dimensions are listed for information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS04.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table 1.

Case material: Resin (dipped).

Capacitance value: See table II.

Capacitance tolerance: See table II.

DC rated voltage: 500 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: See table II.

Dielectric: Mica.

Terminal leads: Lead wires shall be tin-lead coated copper (type C of MIL-STD-1276) or tin-lead coated copper clad steel (type W of MIL-STD-1276).

Marking: In accordance with MIL-C-87164 and figure 2.

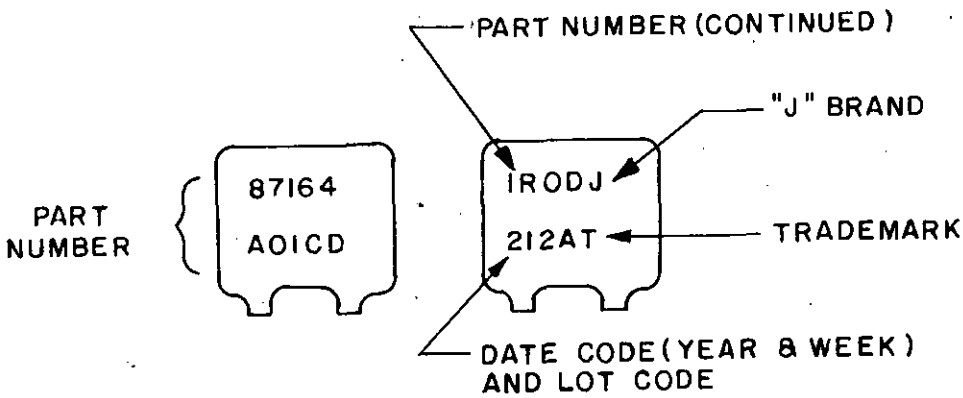


FIGURE 2. Marking example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics and part numbers.

Part numbers 1/ M87164A01	Capacitance value	Capacitance tolerance
	(pF)	
CD1R0D	1.0	D
CD1R5D	1.5	"
CD2R0D	2.0	"
CD2R5D	2.5	"
CD3R0D	3.0	"
CD3R5D	3.5	"
CD4R0D	4.0	"
CD4R5D	4.5	"
CD5R0D	5.0	"
CD6R0D	6.0	"
CD7R0D	7.0	"
CD8R0D	8.0	"
CD9R0D	9.0	"
CD100D	10	"
CD110D	11	"
CD120J	12	J
CD150J	15	"
CD180J	18	"
ED200J	20	"
ED220J	22	"
ED240J	24	"
ED270-	27	GJ
ED300-	30	"
ED330-	33	"
ED360-	36	"
ED390-	39	"
ED430-	43	"
ED470-	47	"
ED510-	51	FGJ
ED560-	56	"
ED620-	62	"
ED680-	68	"
ED750-	75	"
ED820-	82	"
ED910-	91	"
ED101-	100	"
ED111-	110	"
ED121-	120	"
ED131-	130	"
ED151-	150	"
ED161-	160	"
ED181-	180	"
ED201-	200	"

1/ The complete part number will include a letter symbol to indicate the capacitance tolerance; eg, M87164A01ED201F.

Custodian:
Air Force - 19

Review activities:
Air Force - 11
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 19

(Project 5910-F382-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-87164/1(USAF); Capacitors, Fixed, Mica Dielectric, High Reliability, Style CMS04

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

OFFICIAL BUSINESS-PENALTY
FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 LOS ANGELES CA

POSTAGE WILL BE PAID BY ADDRESSEE

SD/ALM
PO Box 92960
Worldway Postal Center
Los Angeles CA 90009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.