INCH-POUND
MIL-PRF-87164/1A
24 May 1999
SUPERSEDING
MIL-C-87164/1
22 November 1982

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC, HIGH RELIABILITY, STYLE CMS04

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-87164.

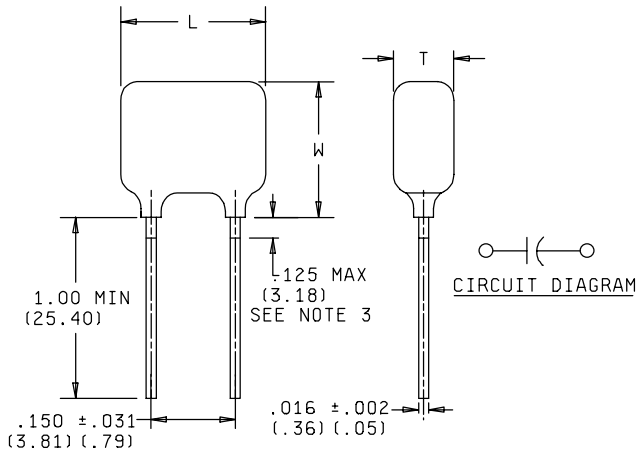

Capacitance (pF)	L		T		W
	Min 1/	Max	Min 1/	Max	Max
1 to 24 inclusive	.300 (7.62)	.370 (9.40)	.100 (2.54)	.190 (4.83)	.350 (8.89)
27	.300 (7.62)	.370 (9.40)	.100 (2.54)	.190 (4.83)	.350 (8.89)
30 to 68 inclusive	.300 (7.62)	.380 (9.65)	.100 (2.54)	.200 (5.08)	.350 (8.89)
75	.300 (7.62)	.380 (9.65)	.100 (2.54)	.210 (5.33)	.360 (9.14)
82	.300 (7.62)	.380 (9.65)	.100 (2.54)	.210 (5.33)	.360 (9.14)
91 and 100	.300 (7.62)	.390 (9.91)	.100 (2.54)	.210 (5.33)	.370 (9.40)
110 and 120	.300 (7.62)	.390 (9.91)	.100 (2.54)	.220 (5.59)	.380 (9.65)
130	.300 (7.62)	.390 (9.91)	.100 (2.54)	.220 (5.59)	.380 (9.65)
150 and 160	.300 (7.62)	.390 (9.91)	.110 (2.79)	.230 (5.84)	.380 (9.65)
180	.300 (7.62)	.400 (10.16)	.120 (3.05)	.230 (5.84)	.390 (9.91)
200	.300 (7.62)	.400 (10.16)	.120 (3.05)	.240 (6.10)	.390 (9.91)

1/ Minimum dimensions are listed for information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS04.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: 500 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: See table I.

Marking: In accordance with MIL-PRF-87164 and figure 2.

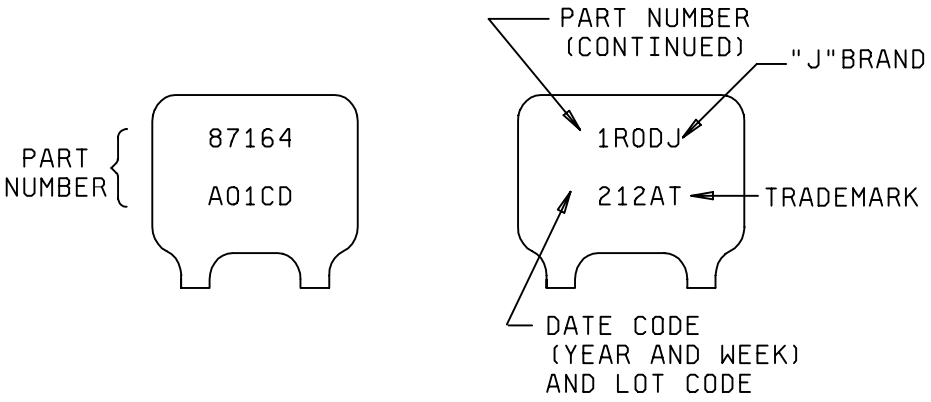

FIGURE 2. Marking example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:53Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and PIN.

PIN 1/ M87164A01	Capacitance value (pF)	Capacitance tolerance
CD1R0D	1.0	D
CD1R5D	1.5	D
CD2R0D	2.0	D
CD2R5D	2.5	D
CD3R0D	3.0	D
CD3R5D	3.5	D
CD4R0D	4.0	D
CD4R5D	4.5	D
CD5R0D	5.0	D
CD6R0D	6.0	D
CD7R0D	7.0	D
CD8R0D	8.0	D
CD9R0D	9.0	D
CD100D	10	D
CD110D	11	D
CD120J	12	J
CD150J	15	J
CD180J	18	J
ED200J	20	J
ED220J	22	J
ED240J	24	J
ED270-	27	G, J
ED300-	30	G, J
ED330-	33	G, J
ED360-	36	G, J
ED390-	39	G, J
ED430-	43	G, J
ED470-	47	G, J
ED510-	51	F, G, J
ED560-	56	F, G, J
ED620-	62	F, G, J
ED680-	68	F, G, J
ED750-	75	F, G, J
ED820-	82	F, G, J
ED910-	91	F, G, J
ED101-	100	F, G, J
ED111-	110	F, G, J
ED121-	120	F, G, J
ED131-	130	F, G, J
ED151-	150	F, G, J
ED161-	160	F, G, J
ED181-	180	F, G, J
ED201-	200	F, G, J

1/ The complete PIN will include a letter symbol to indicate the capacitance tolerance; e.g., M87164A01ED201F.

Custodian:
Army - CR
Navy - EC
Air Force - 19
DLA - CC

Review activity:
Air Force - 11

Preparing activity:
DLA - CC

(Project 5910-1982-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:53Z
Check the source to verify that this is the current version before use.