[INCH-POUND]
A-A-55507/1
August 15, 1995
SUPERSEDING
MIL-F-21346/1F
May 15, 1986

COMMERCIAL ITEM DESCRIPTION

CLIP, ELECTRICAL, FUSE, 30 AND 60 AMPERE, FOR FUSE DIAMETERS 1/4" THRU 13/16"

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers 30 and 60 ampere fuse clips of the types described in MIL-F-21346/1, and is preferred for use over that military specification (see table II).

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN). The PIN shall be AA55507/01- (plus a dash number from figures 1 through 4). PIN example: AA55507/01-05.

3. SALIENT CHARACTERISTICS

3.1 Materials. Materials are as follows (see also figures 1 through 4):

A: Copper clad steel consisting of a core, representing 80 ±1 percent of the sheet thickness, SAE grade 1065. This core shall be located between two layers of oxygen-free copper. Each copper layer shall represent 10 ±1 percent of the total sheet thickness before plating.

B: Copper-beryllium alloy in accordance with ASTM-B194.

C: Phosphor bronze in accordance with ASTM-B139.

3.2 Finish. Finishes are based on the material and the current rating of the clips. Finish for clips made of materials B or C shall be bright alloy plate for 30-ampere ratings, and silver plate for 60-ampere ratings. Clips made of material A shall receive a copper flash initial plating followed by a final finish of either bright alloy plate, silver plate, or hot tin dip. Tin finishes must have a lead content of at least 3 percent. The thickness of all plated finishes shall be at least .0002 inch.

3.3 Configurations and dimensions. See figures 1 through 4.

3.4 Marking. As specified in A-A-55507.

4. QUALITY ASSURANCE PROVISIONS. Quality assurance provisions shall be as specified in A-A-55507.

5. PACKAGING. Packaging shall be as specified in A-A-55507.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-5255, or facsimile (FAX) (513) 296-8868.

AMSC N/A
FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Source of documents. The following documents, of the issue in effect on the date of invitation for bids or request for proposal, form a part of this CID to the extent specified herein:

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B139 - Rod, Phosphor Bronze, Bar and Shapes.

ASTM B194 - Copper-Beryllium Alloy Plate, Sheet, Strip, and Rolled Bar.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

6.2 Ordering data. Ordering data shall be as specified in A-A-55507.


6.3 CAGE code. The CAGE code shall be as specified in A-A-55507.

6.4 Suggested sources of supply. See table I.

6.5 Supersession information. See table II.

6.6 Assistance. Questions, comments, or suggestions pertaining to this CID should be directed to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, telephone (513) 296-5255, FAX (513) 296-8868.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

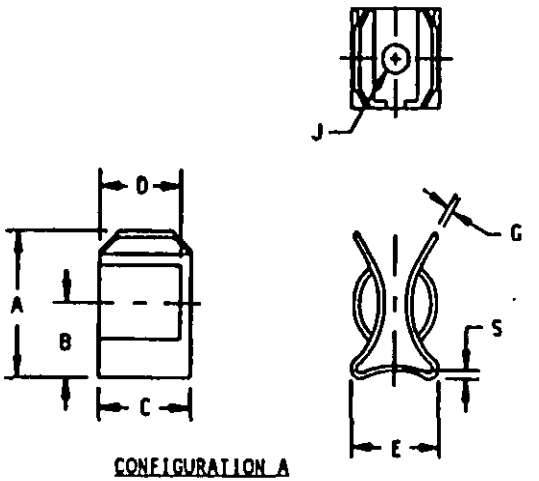


CONFIGURATION A

PIN AA55507/ 01-	Material	Nominal fuse diameter	Maximum current rating (A)	Dimensions (see notes)								Applicable fuse style per MIL-F-15160
				A max	B min	C	D min	E max	G	J (dia) max	S max	
01	B	.250 (6.35)	30	.52 (13.2)	.23 (5.8)	.31 (7.9)	.23 (5.8)	.34 (8.6)	.020 (0.51)	.136 (3.45)	.014 (0.36)	F01, F02, F03
02	B	.281 (7.14)		.58 (14.7)	.31 (8.1)	.41 (10.4)	.34 (8.6)	.43 (10.9)		.176 (4.47)		F05, F06
03	B	.406 (10.31)		.80 (20.3)	.45 (11.4)	.44 (11.2)	.36 (9.1)	.53 (13.5)	.0200 ±.0025 (0.508 ±0.064)	.201 (5.11)	.014 (0.36)	F07, F09, F10, F27, F28, F60
04	A	.406 (10.31)			.47 (11.9)				.028 (0.71)		.033 (0.84)	
05	B	.563 (14.27)		.97 (24.6)	.52 (13.2)	.59 (15.0)	.49 (12.4)	.66 (16.8)	.028 (0.71)	.224 (5.69)	.020 (0.51)	F15, F61
06	A											
07	B	.813 (20.62)	60	1.31 (33.3)	.76 (19.3)	.74 (18.8)	.61 (15.5)	.90 (22.9)	.045 (1.14)	.270 (6.86)		F16, F29, F30, F62
08	A											

NOTES:
1. Dimensions are in inches. Millimeters are in parentheses and are provided for general information only.
2. Unless otherwise specified, tolerances are ±.02 (0.5 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.

Figure 1. Configurations and dimensions, configuration A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

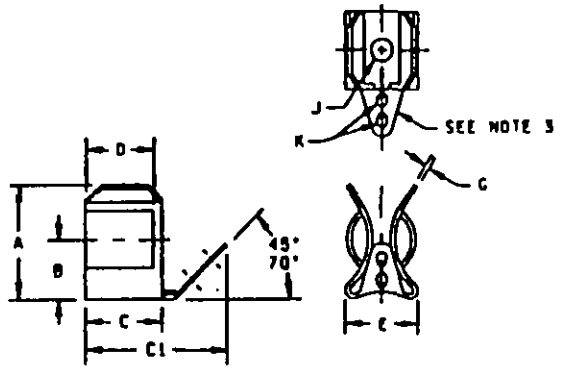


CONFIGURATION B

PIN AA55507/ 01-	Material	Nominal fuse diameter	Maximum current rating (A)	Dimensions (see notes)									Applicable fuse style per MIL-F-15160
				A max	B min	C	C1 max	D min	E max	G	J (dia)	K (dia)	
09	B	.250 (6.35)	30	.50 (12.7)	.23 (5.8)	.31 (7.9)	.63 (16.0)	.23 (5.8)	.34 (8.6)	.020 (0.51)	.131 (3.33)	.093 (2.36)	F01, F02, F03
10	B	.406 (10.31)	30	.80 (20.3)	.45 (11.2)	.44 (11.2)	.78 (19.8	.36 (9.1)	.51 (13.0)	.0200 ±.0025 (.508 ±.064)	.196 (4.98)	.093 (2.36)	F07, F09, F10, F27, F28, F60

NOTES:
1. Dimensions are in inches. Millimeters are in parentheses and are provided for general information only.
2. Unless otherwise specified, tolerances are ±.02 for two place decimals and ±.005 for three place decimals.
3. Solder lug terminal shall be formed integral with the fuse clip.

Figure 2. Configurations and dimensions, configuration B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

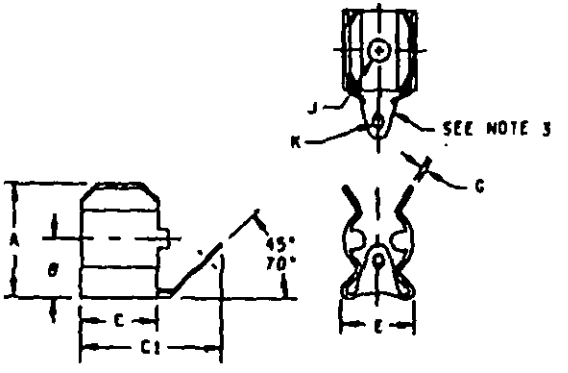

CONFIGURATION C

PIN AA55507/ 01-	Material	Nominal fuse diameter	Maximum current rating (A)	Dimensions (see notes)								Applicable fuse style per MIL-F-15160
				A max	B min	C	C1 max	E max	G	J (dia)	K	
11	B	.250 (6.35)	30	.50 (12.7)	.23 (5.8)	.31 (7.9)	.60 (15.2)	.34 (8.6)	.020 (0.51	.131 (3.33)	.09 x .16 (2.29 x 4.06)	F01, F02, F03

NOTES:
1. Dimensions are in inches. Millimeters are in parentheses and are provided for general information only.
2. Unless otherwise specified, tolerances are ± 0.02 for two place decimals and ± 0.005 for three place decimals.
3. Solder lug terminal shall be formed integral with the fuse clip.

Figure 3. Configurations and dimensions, configuration C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN AA55507/01-	Vendor commercial part number 2/			
	CAGE code 18762	CAGE code 71400	CAGE code 75915	CAGE code 84613
01		5682-11	121001	
02		5674-10		
03		5960-23	125001	
04	FC21CF			FC21CF
05	FC21DN		127001	FC21DN
06	FC21DF			FC21DF
07			129001	
08	FC21EF			
09		5678-05		
10		5623-11		
11			121004	

1/ This table is not a qualified products list or an approved source list. The manufacturers listed have submitted Certificates of Compliance to DESC-ELDM (see A-A-55507); however, parts may be ordered from any manufacturer who agrees to provide products that meet all the requirements of this CID.

2/ Vendor commercial part numbers are provided for reference only. Do not use these numbers for acquisition purposes.

Vendor CAGE code	Vendor name and address
18762	Superior Fuse and Mfg. Co. Inc. 1333 SW 30th Avenue Deerfield Beach, FL 33442-8149 Phone: (305) 428-3344 FAX: (305) 428-2333
71400	Bussmann PO Box 14460 St. Louis, MO 63178-4460 Phone: (314) 394-2877 FAX: (314) 527-1423
75915	Littelfuse Inc. 800 E. Northwest Highway Des Plaines, IL 60016-3096 Phone: (708) 824-1188 FAX: (708) 824-9476
84613	FIC Corporation 12216 Parklawn Drive Rockville, MD 20852-2046 Phone: (800) 638-6594 FAX: (301) 881-0530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

Superseded PIN M21346/1-	Superseded type designation per MIL-F-21346/1F	Replacement PIN AA55507/01-
01	FC21AN	01
02	FC21BN	02
03	FC21CN	03
04	FC21CF	04
05	FC21DN	05
06	FC21DF	06
07	FC21EN	07
08	FC21EF	08
09	FC22AN	09
10	FC22BN	02 1/
11	FC22CN	10
12	FC22DN	05 1/
13	FC22EN	07 1/
14	FC23AN	11
15	FC23BN	02 1/
16	FC23CN	10
17	FC23DN	05 1/
18	FC23EN	07 1/
19	FC25AN	no replacement
20	FC25BN	no replacement

1/ This replacement PIN is provided without a solder terminal, and therefore is not directly interchangeable with the superseded PIN.

MILITARY INTERESTS:

Custodians:
Army - ER
Navy - SH
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA-ES

Project 5999-0319-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:50Z
Check the source to verify that this is the current version before use.