[INCH-POUND]
A–A–55563/12B
14 May 2009
Superseding
A–A–55563/12A
January 31, 2002


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, LOW PROFILE, OPEN ENDED, WITHOUT FLARED ENTRY, WITH 3 OFFSET (SIDE) MOUNTING HOLES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–55563.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

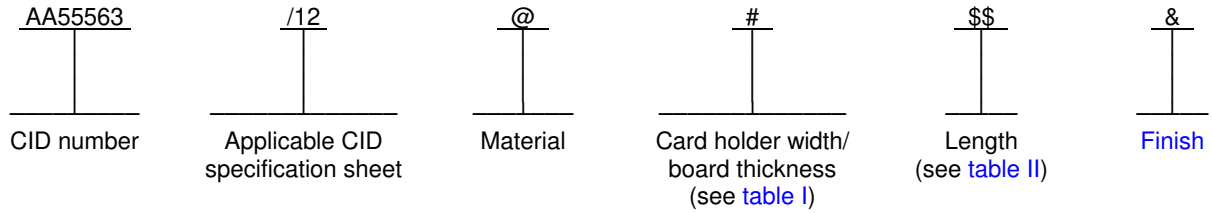


Example: AA55563/12DH60H is the PIN for a stainless steel, 6.0 inches (152 mm) long, silver plated, narrow profile card guide with two center mounting holes. The card guide is designed to accommodate circuit card assemblies with printed board thicknesses of .0937 inch (2.38 mm) and has two offset mounting holes.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1, table I and table II).

Material type. Material types shall be defined in A–A–55563. The applicable material type designators for this CID specification sheet are "A" (beryllium copper ¼ H, temper TD01), "B" (beryllium copper ¼ HT, temper TH01), or "D" (stainless steel ¼ H).

Material thickness. The material thickness shall be .005 ±.002 inch (0.13 ±0.05 mm).

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is shown on figure 1 as dimensions "D" and "T". The applicable card holder width/board thickness designators for this CID specification sheet are "A", "B", and "C" as specified in table I.


Overall length. Overall length is shown on figure 1 as dimension "L", and is displayed in table II herein. Applicable overall length designator "10", "15", "20", "25", "30", "35", "40", "45", "50", "55", "60", "65", "70", or "75" shall be included in the PIN.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Finish. Finish types shall be defined in A–A–55563. Applicable finish materials designator "H" (silver plate), "K" (no finish), "C" (copper plate), "D" (ebonal, black), "E" (gold plate), "F" (nickel plate), "R" (zinc, clear chromate), or "J" (zinc, yellow chromate) are available for material type designators "A" and "B". Finish designator "G" (passivate) is the only finish available for material type designator "D".

Mounting hole spacing. Mounting hole spacing is shown on figure 1 as dimension "M". Dimension "M" is listed in table II herein.

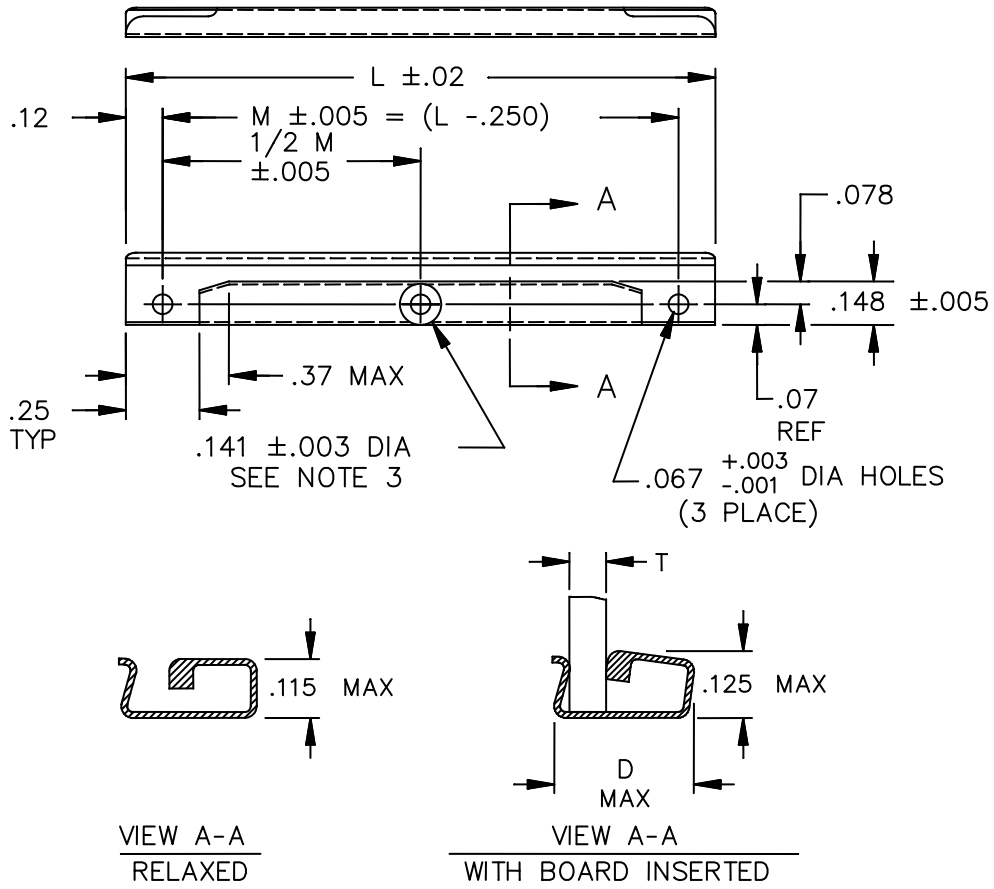


| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .005 | 0.13 | .078 | 1.98 | .125 | 3.18 | .25 | 6.4 |
| .02 | 0.5 | .115 | 2.92 | .141 | 3.58 | .250 | 6.35 |
| .067 | 1.70 | .12 | 3.0 | .148 | 3.76 | .37 | 9.4 |
| .07 | 1.8 | | | | | | |

NOTES:
1. Dimensions are in inches. Millimeters are given for information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. NOTE: Center access hole design is optional. Use of "D" type access hole is permitted and must meet the dimensional requirements.

FIGURE 1. Card holder design and dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder configurations and dimensions (see figure 1). 1/

| PIN designator for card holder width/ board thickness | Card holder width 1/ 2/ Dimension "D" max | | Board thickness 1/ 2/ 3/ Dimension "T" ref | |
|---|---|---|---|---|
| | Inches | mm | Inches | mm |
| A | .27 | 6.85 | .0312 | 0.79 |
| B | .27 | 6.85 | .0625 | 1.59 |
| C | .27 | 6.85 | .0937 | 2.38 |

1/ Dimensions are in inches. Millimeters are given for information only.
2/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
3/ Dimension "T" is given as reference.

TABLE II. Length and hole spacing. 1/

| PIN designator for overall length | Dimension "L" ±.020 (0.51) | | Dimension "M" ±.005 (0.13) | |
|---|---|---|---|---|
| | Inches | mm | Inches | mm |
| 10 | 1.0 | 25 | .750 | 19.1 |
| 15 | 1.5 | 38 | 1.25 | 31.8 |
| 20 | 2.0 | 51 | 1.75 | 44.5 |
| 25 | 2.5 | 64 | 2.25 | 57.2 |
| 30 | 3.0 | 76 | 2.75 | 69.9 |
| 35 | 3.5 | 89 | 3.25 | 82.6 |
| 40 | 4.0 | 102 | 3.75 | 95.3 |
| 45 | 4.5 | 114 | 4.25 | 108.0 |
| 50 | 5.0 | 127 | 4.75 | 120.7 |
| 55 | 5.5 | 140 | 5.25 | 133.4 |
| 60 | 6.0 | 152 | 5.75 | 146.1 |
| 65 | 6.5 | 165 | 6.25 | 158.8 |
| 70 | 7.0 | 178 | 6.75 | 171.5 |
| 75 | 7.5 | 191 | 7.25 | 184.2 |

1/ Dimensions are in inches. Millimeters are given for information only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–55563 – Holders, Electrical Card, Metal Card Guide, General Requirements for.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| Manufacturer CAGE | Manufacturer name and address | Manufacturer contact information |
|---|---|---|
| 65884 | Sigmation<br>4549 Gateway Circle<br>Dayton, OH 45440–1792 | Telephone: (937) 435–2129<br>Facsimile: (937) 435–2149<br>Electronic mail: sigmation@ameritech.net<br>URL: www.sigmation.com |

Part number supersession data. This CID specification sheet PINs supersede the following manufacturer's part numbers as shown. This information is being provided to assist in reducing proliferation in the Government inventory system. (See table III below.)

TABLE III. Commercial part number supersession data.

| CID PIN; AA55563/12@#$$& 1/ | | | | Manufacturers 2/ | |
|---|---|---|---|---|---|
| Material type (@) | Card holder width/board thickness (see table I) | Overall length designator (see table II) | Finish (&) 3/ | CAGE 65884 4/ | |
| A | # | 10 | & | AA55563/12A#10& | |
| A | # | 15 | & | AA55563/12A#15& | |
| A | # | 20 | & | AA55563/12A#20& | |
| A | # | 25 | & | AA55563/12A#25& | |
| A | # | 30 | & | AA55563/12A#30& | |
| A | # | 35 | & | AA55563/12A#35& | |
| A | # | 40 | & | AA55563/12A#40& | |
| A | # | 45 | & | AA55563/12A#45& | |
| A | # | 50 | & | AA55563/12A#50& | |
| A | # | 55 | & | AA55563/12A#55& | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| CID PIN; AA55563/12@#$$& 1/ | | | | Manufacturers 2/ | |
|---|---|---|---|---|---|
| Material type (@) | Card holder width/board thickness (see table I) | Overall length designator (see table II) | Finish (&) 3/ | CAGE 65884 4/ | |
| A | # | 60 | & | AA55563/12A#60& | |
| A | # | 65 | & | AA55563/12A#65& | |
| A | # | 70 | & | AA55563/12A#70& | |
| A | # | 75 | & | AA55563/12A#75& | |
| B | # | 10 | & | AA55563/12B#10& | |
| B | # | 15 | & | AA55563/12B#15& | |
| B | # | 20 | & | AA55563/12B#20& | |
| B | # | 25 | & | AA55563/12B#25& | |
| B | # | 30 | & | AA55563/12B#30& | |
| B | # | 35 | & | AA55563/12B#35& | |
| B | # | 40 | & | AA55563/12B#40& | |
| B | # | 45 | & | AA55563/12B#45& | |
| B | # | 50 | & | AA55563/12B#50& | |
| B | # | 55 | & | AA55563/12B#55& | |
| B | # | 60 | & | AA55563/12B#60& | |
| B | # | 65 | & | AA55563/12B#65& | |
| B | # | 70 | & | AA55563/12B#70& | |
| B | # | 75 | & | AA55563/12B#75& | |
| D | # | 10 | G | AA55563/12D#10G | |
| D | # | 15 | G | AA55563/12D#15G | |
| D | # | 20 | G | AA55563/12D#20G | |
| D | # | 25 | G | AA55563/12D#25G | |
| D | # | 30 | G | AA55563/12D#30G | |
| D | # | 35 | G | AA55563/12D#35G | |
| D | # | 40 | G | AA55563/12D#40G | |
| D | # | 45 | G | AA55563/12D#45G | |
| D | # | 50 | G | AA55563/12D#50G | |
| D | # | 55 | G | AA55563/12D#55G | |
| D | # | 60 | G | AA55563/12D#60G | |
| D | # | 65 | G | AA55563/12D#65G | |
| D | # | 70 | G | AA55563/12D#70G | |
| D | # | 75 | G | AA55563/12D#75G | |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

1/ See Classification/Part or Identification Number paragraph for symbol representations.
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A–A–55563.
3/ Finish materials designator "H", "K", "C", "D", "E", "F", "R", or "J" are available for this material type (see finish for a description of the designators).
4/ Manufacturer CAGE 65884 PIN's are the same as the CID PIN. The character "#" denotes the card holder width/board thickness and needs to be replaced with the appropriate PIN designator from table I. The character "&" finish material and shall be replaced with the appropriate PIN designator (see finish).

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This CID specification sheet provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS:

Preparing Activity:

DLA – CC

Project: 5998–2007–012

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.