[INCH–POUND]
A–A–55563/19A
27 November 2012
Superseding
A–A–55563/19
11 November 2003

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, LOW PROFILE, OPEN ENDED, WITHOUT FLARED ENTRY, WITH 2 MOUNTING HOLES, SHORT LENGTH

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–55563.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA55563	/19	@	#	14	&
CID number	Applicable CID sheet	Material	Card holder width/board thickness (see table I)	Overall length	Finish

Example: AA55563/19AB14D is the PIN for a beryllium copper (1/4 H, temper TD01), 1.37 inches (34.8 mm), long, black ebonal finished, low profile card holder without flared entry. The card guide is designed to accommodate circuit card assemblies with printed board thicknesses of.062 inch (1.58 mm) and has three offset mounting holes.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1 and table I) and meet the general requirements specified in CID A–A–55563.

Material type. Material types shall be defined in A–A–55563. The applicable material type designators for this CID specification sheet are "A" (beryllium copper 1/4 H, temper TD01), "B" (beryllium copper 1/4 HT, temper TH01), or "D" (stainless steel 1/4 H).


Material thickness. The material thickness shall be .008 ±.002 inch (0.20 ±0.05 mm).


Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and shown on figure 1 as dimensions "C_{MAX}" and "T". The applicable card holder width/board thickness designators for this CID specification sheet are "A", "B", "C", or "D" and shall be included in the PIN.

Overall length. Overall length of the card holder is 1.37 ±.02 inches (34.8 ±0.5 mm). Overall length is shown on figure 1. Applicable overall length designator is "14".


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Finish. Finish materials types shall be defined in A–A–55563. Applicable finish materials designators "C" (copper plate), "E" (gold plate), "F" (nickel plate), "H" (silver plate), "J" (zinc, yellow chromate), "K" (no finish), or "R" (zinc, clear chromate) are available for material type designators "A" and "B". Finish designator "G" (passivate) is the only finish available for material type designator "D" (stainless steel). The finish designator shall be included in the PIN.

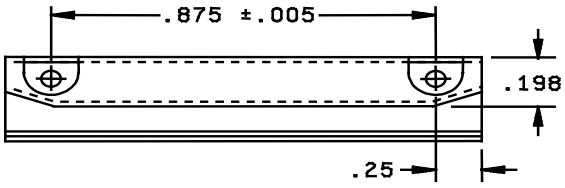



MOUNTING HOLE DETAIL

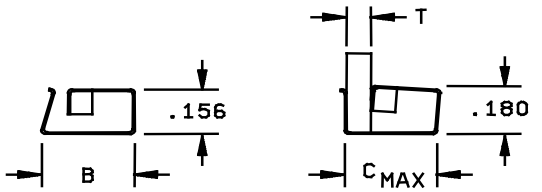

VIEW A-A
RELAXED

VIEW A-A
WITH BOARD INSERTED

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.067	1.70	.160	4.07	.25	6.4
.003	0.08	.093	2.36	.180	4.58	.875	22.22
.005	0.13	.156	3.96	.198	5.03	1.37	34.8

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm), for 2 places and ±.010 inch (0.25 mm), for three place decimals.

FIGURE 1. Card holder design and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder width/board thickness. 1/

PIN designator for card holder width / board thickness	Dimension "T" (board thickness) 2/		Dimension "B" 3/		Dimension "C_{MAX}" 3/	
	Inches	(mm)	Inches	(mm)	Inches	(mm)
A	.031	(0.79)	.298	(7.57)	.330	(8.39)
B	.063	(1.60)	.298	(7.57)	.330	(8.39)
C	.094	(2.39)	.298	(7.57)	.330	(8.39)
D	.125	(3.18)	.330	(8.39)	.370	(9.40)

1/ See figure 1. Metric equivalents are given for information only.
2/ Dimension "T" is given as reference.
3/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–55563 – Holder, Electrical Card, Metal Card Guide, General Requirements For.

(Copies of these documents are available online at https://assist.dla.mil/quicksearch or https://assist.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data shall be as specified in A–A–55563.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher – A Division of Pentair Technical Products 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 URL: www.birtcherproducts.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following manufacturer's P/Ns in table II as shown. The CID PINs listed in table II cover the different lengths available. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. Commercial part number supersession data.

CID PIN; AA55563/19@#14& 1/				Manufacturers 2/	
Material type	Card holder width/board thickness	Overall length	Finish (&)	CAGE 18915 3/	
A	A	14	C, D, E, F, H, I, J, or K	35-5B-1-P	
A	B	14	C, D, E, F, H, I, J, or K	35-5B-2-P	
A	C	14	C, D, E, F, H, I, J, or K	35-5B-3-P	
A	D	14	C, D, E, F, H, I, J, or K	35-5B-4-P	
B	A	14	C, D, E, F, H, I, J, or K	35-5BH-1-P	
B	B	14	C, D, E, F, H, I, J, or K	35-5BH-2-P	
B	C	14	C, D, E, F, H, I, J, or K	35-5BH-3-P	
B	D	14	C, D, E, F, H, I, J, or K	35-5BH-4-P	
D	A	14	G	35-5CR-1	
D	B	14	G	35-5CR-2	
D	C	14	G	35-5CR-3	
D	D	14	G	35-5CR-4	

1/ See classification/part or identification number herein for symbol representations.
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A–A–55563.
3/ Manufacturer CAGE 18915 superseded part number suffix letter "P" denotes finish material.
4/ Manufacturer CAGE 65884 PIN's are the same as the CID PIN. The at sign (&) denotes finish C, D, E, F, G, H, I, J, or K.

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous revision, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force –85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA –FAS

Preparing activity

DLA – CC

Project 5998–2012–039

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.