[INCH–POUND]

A–A–55563/20B
20 December 2017
Superseding
A–A–55563/20A
27 November 2012

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, LOW PROFILE, OPEN ENDED, WITH FLARED ENTRY, WITH 2 MOUNTING HOLES, SHORT LENGTH

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–55563.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA55563	/20	@	#	14	&
CID number	Applicable CID sheet	Material	Card holder width/board thickness (see table I)	Overall length	Finish (see table II)

Example: AA55563/20DB14G is the PIN is for a low profile card holder with flared entry and has two offset mounting holes. The material type is stainless steel and a finish is passivate (only finish available for stainless steel card holders), with a length is 1.37 inches (34.8 mm) (only length available for this card holder). The card holder is designed to accommodate circuit card assemblies with printed board thicknesses of .062 inch (1.58 mm).

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID-specification sheet shall be as specified herein (see figure 1 and table I) and meet the general requirements specified in CID A–A–55563.

Material type. Material types shall be defined in A–A–55563. The applicable material type designators for this CID specification sheet are "A" (beryllium copper of temper TD01; formerly ¼ H), "B" (beryllium copper of temper TH01; formerly ¼ HT), or "D" (stainless steel 1/4 H).


Material thickness. The material thickness shall be .008 ±.002 inch (0.20 ±0.05 mm).

Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and shown on figure 1 as dimensions "C_{MAX}" and "T". The applicable card holder width/board thickness designators for this CID specification sheet are "A", "B", "C", or "D".

Overall length. Overall length of the card holder is 1.37 ±02 inches (34.8±0.5 mm). Overall length is shown on figure 1. Applicable overall length designator "14".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Finish. Finish materials types shall be defined in A–A–55563. Applicable finish materials designators "C" (copper plate), D" (black ebonal), "E" (gold plate), "F" (nickel plate), "H" (silver plate), "J" (zinc, yellow chromate), "K" (no finish), or "R" (zinc, clear chromate) are available for material type designators "A" and "B". Finish designator "G" (passivate) is the only finish available for material type designator "D" (stainless steel). The finish designator shall be included in the PIN.

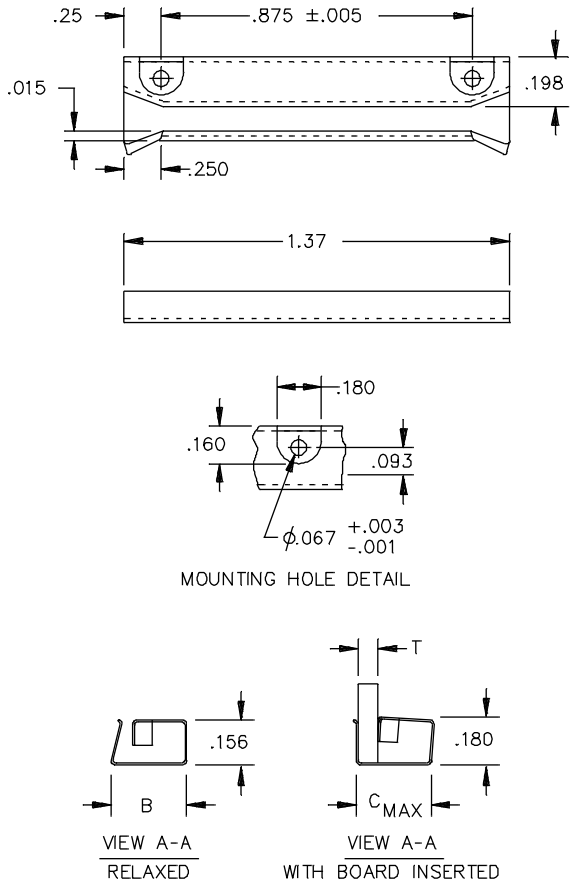

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.015	0.38	.156	3.96	.198	5.03	.875	22.22
.003	0.08	.067	1.70	.160	4.07	.250	6.35	1.37	34.8
.005	0.13	.093	2.36	.180	4.58	.25	6.4		

NOTES:
1. Dimensions are in inches. Millimeter equivalents are given for general information only.
2. Unless otherwise specified, tolerances are±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

FIGURE 1. Card holder design and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder width/board thickness. 1/

PIN designator for card holder width/ board thickness	Dimension "T" (board thickness) 2/		Dimension "B" 3/		Dimension "C_{MAX}" 3/	
	Inches	(mm)	Inches	(mm)	Inches	(mm)
A	.031	(0.79)	.298	(7.57)	.330	(8.39)
B	.063	(1.60)	.298	(7.57)	.330	(8.39)`
C	.094	(2.39)	.298	(7.57)	.330	(8.39)
D	.125	(3.18)	.330	(8.39)	.370	(9.40)

1/ See figure 1. Millimeter equivalents are given for general information only.
2/ Dimension "T" is given as reference.
3/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–55563 – Holder, Electrical Card, Metal Card Guide, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Ordering data. Ordering data shall be as specified in A–A–55563.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
61081	Pentair Technical Products (formerly Birtcher) 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 URL: http://schroff.pentair.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Part number supersession data. This CID specification sheet supersedes the following manufacturer's part numbers as shown. The information in table II is being provided to assist in reducing proliferation in the Government inventory system.

TABLE II. Commercial part number supersession data.

CID PIN; AA55563/20@#14& 1/				Manufacturers 2/	
Material type	Card holder width/board thickness	Overall length	Finish (&)	CAGE 61081 3/	
A	A	14	C, D, E, F, H, I, J, or K	35F–5B–1–P	
A	B	14	C, D, E, F, H, I, J, or K	35F–5B–2–P	
A	C	14	C, D, E, F, H, I, J, or K	35F–5B–3–P	
A	D	14	C, D, E, F, H, I, J, or K	35F–5B–4–P	
B	A	14	C, D, E, F, H, I, J, or K	35F–5BH–1–P	
B	B	14	C, D, E, F, H, I, J, or K	35F–5BH–2–P	
B	C	14	C, D, E, F, H, I, J, or K	35F–5BH–3–P	
B	D	14	C, D, E, F, H, I, J, or K	35F–5BH–4–P	
D	A	14	G	35F–5CR–1	
D	B	14	G	35F–5CR–2	
D	C	14	G	35F–5CR–3	
D	D	14	G	35F–5CR–4	

1/ See classification/part or identification number herein for symbol representations.
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A–A–55563.
3/ Manufacturer CAGE 61081 superseded part number suffix letter "P" denotes finish C, D, E, F, G, H, I, J, or K.

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing activity

DLA – CC

Project 5998–2018–010

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.