[INCH-POUND]
A-A-55563/22
19 November 2004

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, METAL CARD GUIDE, LOW PROFILE, CLOSED ENDED, WITH FLARED ENTRY, WITH THREE MOUNTING HOLES, FOR VERSAMODULE EUROCARD APPLICATIONS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A-A-55563.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

AA55563	/22	@	#	$ $	&
CID number	Applicable CID sheet	Material	Card holder width/board thickness	Length	Finish

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figure 1).

Material type. Materials types shall be defined in table I of A-A-55563. The applicable material type designators for this CID specification sheet are “A”, “B”, or “D”.

Material thickness. The material thickness shall be .008 inch ± .001 inches (0.20 ± 0.03 mm) for material designators “A” and “B”, and .008 inch ± .003 inches (0.20 ± 0.08 mm) for material designator “D”.


Card holder width/board thickness. The card holder width/board thickness shall be defined in table I herein and is shown on figure 1 as dimensions "C_{MAX}" and "T".

Overall length. Overall length is shown on figure 1 as dimension "L", and is defined in table II herein. Applicable overall length designator “20”, “25”, “30”, “35”, “40”, “45”, “50”, “55”, or “60” shall be included in the PIN.

Mounting hole spacing. Mounting hole spacing is shown on figure 1 as dimension "M" and “M/2”. Dimension “M” and “M/2” are displayed in table II herein.

Finish. Finish materials types shall be defined in A-A-55563. Applicable finish materials designator “C”, “E”, “F”, “H”, “I”, “J”, or “K” shall be included in the PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

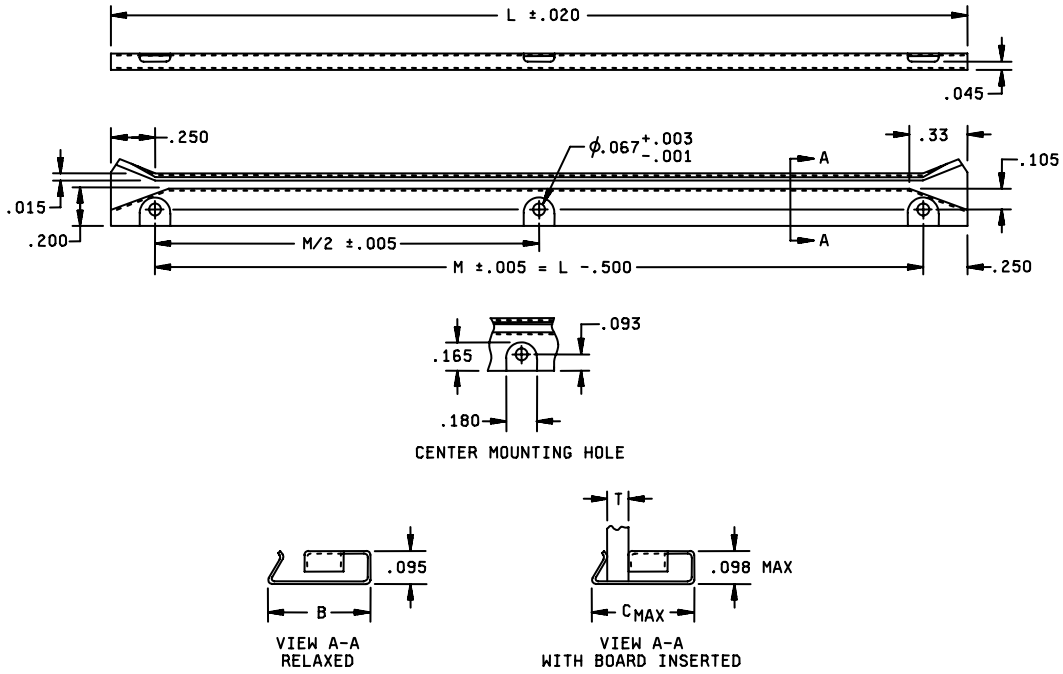

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.020	0.51	.095	2.41	.180	4.57
.003	0.08	.045	1.14	.098	2.49	.200	5.08
.005	0.13	.067	1.70	.105	2.67	.250	6.35
.015	0.38	.093	2.36	.165	4.19	.33	8.4
						.500	12.7

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for information only.
3. Unless otherwise specified, tolerances are ± .02 inch (0.5 mm) for two place decimals and ± .010 (0.25 mm) for three place decimals.

FIGURE 1. Card holder design and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

TABLE I. Card holder width/board thickness. 1/

PIN designator for card holder width/ board thickness	Dimension "T" (board thickness) 2/		Dimension "B" 3/		Dimension "C_{MAX}" 3/	
	Inches	(mm)	Inches	(mm)	Inches	(mm)
A	.031	(0.79)	.300	(7.62)	.320	(8.13)
B	.063	(1.60)	.300	(7.62)	.320	(8.13)
C	.093	(2.36)	.300	(7.62)	.320	(8.13)

1/ See figure 1. Millimeters are given for information only.
2/ Dimension "T" is given as reference.
3/ Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ± .010 (0.25 mm) for three place decimals.

TABLE II. Length and hole spacing. 1/

PIN overall length designator	Dimension "L" ± .020 (0.51)	Dimension "M" ± .005 (0.13)	Dimension "M/2" ± .005 (0.13)
20	2.0 (51)	1.5 (38)	.75 (19.0)
25	2.5 (64)	2.0 (51)	1.0 (25.0)
30	3.0 (76)	2.5 (64)	1.25 (31.8)
35	3.5 (89)	3.0 (76)	1.5 (38.0)
40	4.0 (102)	3.5 (89)	1.75 (44.5)
45	4.5 (114)	4.0 (102)	2.0 (51.0)
50	5.0 (127)	4.5 (114)	2.25 (57.2)
55	5.5 (140)	5.0 (127)	2.5 (64.0)
60	6.0 (152)	5.5 (140)	2.75 (69.9)

1/ Millimeters are given for information only.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	APW Electronic Solutions 14100 Danielson Street Poway, CA 92064–6898	Tel: (858) 679–4550 Toll Free: (888) 957–8291 Fax: (858) 679–4555 E-mail: sales.electronicsolutions@apw.com URL: www.apw.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.

Part number supersession data. This CID specification sheet supersedes the following manufacturer's part numbers as shown in table III. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

CID PIN; AA55563/22@#$$& 1/				Manufacturers 2/	
Material type (see A-A-55563)	Card holder width/board thickness (table I herein)	Overall length designator (see table II)	Finish (see A-A-55563)	CAGE 18915 3/	
@	#	20	&	35CF-8M-T-4-P	
@	#	25	&	35CF-8M-T-5-P	
@	#	30	&	35CF-8M-T-6-P	
@	#	35	&	35CF-8M-T-7-P	
@	#	40	&	35CF-8M-T-8-P	
@	#	45	&	35CF-8M-T-9-P	
@	#	50	&	35CF-8M-T-10-P	
@	#	55	&	35CF-8M-T-11-P	
@	#	60	&	35CF-8M-T-12-P	

1/ The at sign (@) denotes material type, pound sign (#) denotes card holder width/board thickness (see dimension "T" on figure 1 herein), dollar signs ($$) denotes overall length (see dimension "L" on figure 1 herein and A-A-55563), and the ampersand (&) denotes finish.

EXAMPLE PIN: AA55563/22AB60F = Holder, electrical card, metal card guide, low profile, open ended, with flared entry, with three offset mounting holes; base material is beryllium copper with temper 1/4H, card holder width/board thickness, dimension "C_{MAX}", is .305 inch (7.75 mm), dimension "T" is .063 inch (1.60 mm), commonly known as having a board thickness of .062 or 1/16 inch (1.57 mm); the overall length is 6.0 inches (152 mm), dimension "F"; and the finish is electrodeposited nickel.

2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PINs shown. For actual part marking requirements, see the marking paragraph of A-A-55563.

3/ Manufacturer CAGE 18915 superseded part number is constructed as follows: The series type is "35CF-8", the letter "M" denotes material type, the letter "T" denotes card holder width/board thickness, the numbers "4" through "12" denotes card holder lengths, and the letter "P" denotes finish material.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FSS

Preparing Activity

DLA – CC

Project 5998–0186

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:53Z
Check the source to verify that this is the current version before use.