INCH-POUND

MIL-DTL-27072/83B
8 December 2000
SUPERSEDING
MIL-C-27072/83A
24 September 1987

DETAIL SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL, MULTICONDUCTOR (7 CONDUCTORS) AND SINGLE SHIELDED, M27072/83MACA*

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27072C.

REQUIREMENTS:

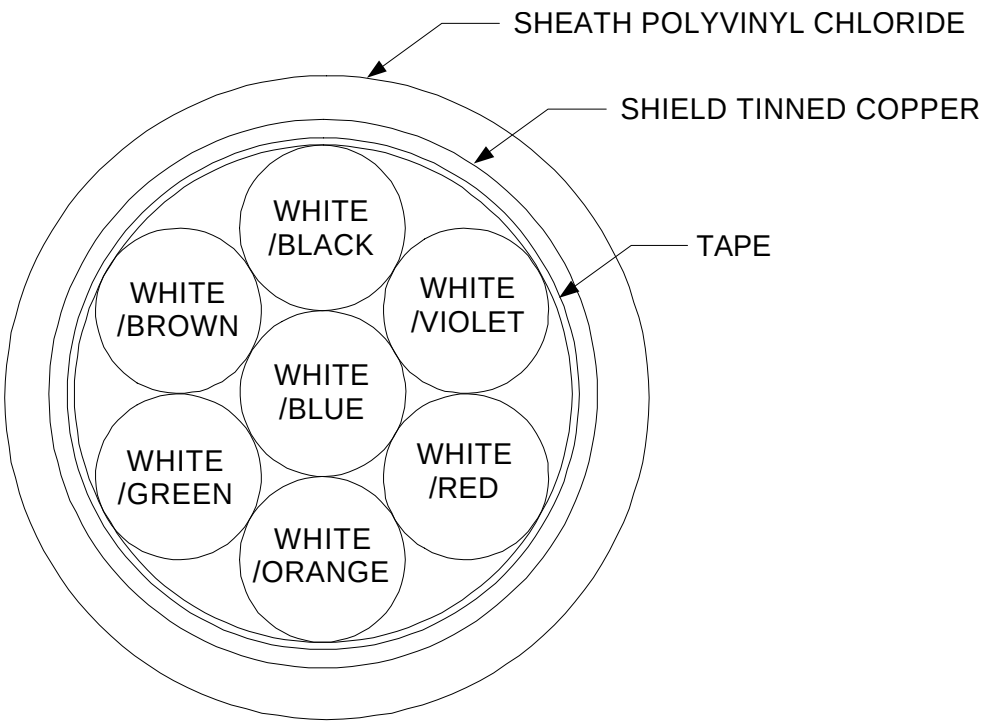

FIGURE 1. Cable configuration.

*The complete part number requires a color code designator (see table I).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.

Design and construction: See figure 1.
Number of conductors: 7
Temperature rating: 105 °C

Components:
Basic wire: M16878/17BFB*** (See table I.)
Conductor: Tinned copper
Primary insulation: Polyvinyl chloride
Colors: White with blue tracer
White with brown tracer
White with green tracer
White with orange tracer
White with red tracer
White with violet tracer
White with black
Jacket over insulation: Polyamide
Color: Natural

Filler: Not applicable

Cabling: Not applicable

Binder tape material: In accordance with MIL-DTL-27072

Shield:
Material: Tinned copper
Gauge: 36 AWG
Braid angle: Braid 20 to 40 degrees

Jacket undershield: Not applicable

Sheath:
Material: Polyvinyl chloride
Wall thickness: .025 inch nominal
Tensile strength: In accordance with table V of MIL-DTL-27072
Ultimate elongation: In accordance with table V of MIL-DTL-27072
Accelerated aging: In accordance with table V of MIL-DTL-27072
Color: See table IV of MIL-DTL-27072

Finished cable: See table I
Cold bend: Mandrel size in accordance with table XIII of MIL-DTL-27072
Dielectric withstanding voltage: 2,000 V rms
Conductor resistance: In accordance with basic wire specification

Table I. Construction data.

PIN 27072/83	Basic wire except color M16878/17BFB*** (reference)				Finished cable diameter (in.) ±10%
	Wire size (AWG)	Number of strands	Strand size	Nominal diameter (inch)	
MACA*	22	7	30	.056	.247

Asterisks (*) shall be replaced by the appropriate color designator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issues due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 6145-2262-020)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.