INCH-POUND

MIL-DTL-27072/83C
12 March 2012
SUPERSEDING
MIL-DTL-27072/83B
8 December 2000

DETAIL SPECIFICATION SHEET

# CABLE, SPECIAL PURPOSE, ELECTRICAL, MULTICONDUCTOR (7 CONDUCTORS) AND SINGLE SHIELDED, M27072/83MACA*

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27072.

REQUIREMENTS:

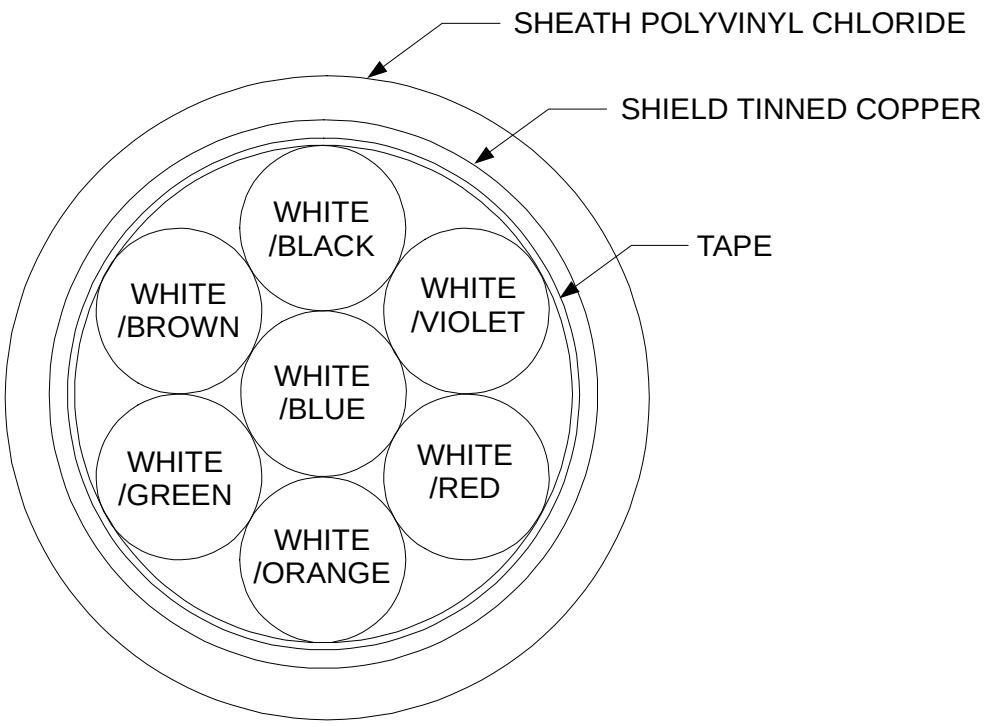


NOTE: The complete Part or Identifying Number (PIN) requires a color code designator (see table I).

FIGURE 1. Cable configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| Design and construction: | See figure 1. |
| Number of conductors: | 7 |
| Temperature rating: | 105 °C |
| Components: | |
| Basic wire: M16878/17BFB*** | (see table I) |
| Conductor: | Tinned copper |
| Primary insulation: | Polyvinyl chloride |
| Colors: | White with blue tracer<br>White with brown tracer<br>White with green tracer<br>White with orange tracer<br>White with red tracer<br>White with violet tracer<br>White with black |
| Jacket over insulation: | Polyamide |
| Color: | Natural |
| Filler: Not applicable | |
| Cabling: | Not applicable |
| Binder tape material: | In accordance with MIL-DTL-27072 |
| Shield: | |
| Material: | Tinned copper |
| Gauge: | 36 AWG |
| Braid angle: | Braid 20 to 40 degrees |
| Jacket undershield: | Not applicable |
| Sheath: | |
| Material: | Polyvinyl chloride |
| Wall thickness: | .025 inch nominal |
| Tensile strength: | In accordance with MIL-DTL-27072 |
| Ultimate elongation: | In accordance with MIL-DTL-27072 |
| Accelerated aging: | In accordance with MIL-DTL-27072 |
| Color: | See MIL-DTL-27072 |
| Finished cable: | See table I |
| Cold bend: | Mandrel size in accordance with MIL-DTL-27072 |
| Dielectric withstanding voltage: | 2,000 V rms |
| Conductor resistance: | In accordance with basic wire specification |

TABLE I. Construction data.

| PIN 27072/83 | Basic wire except color M16878/17BFB***1/,2/ (reference) | | | | Finished cable diameter inch(mm) ±10% |
|---|---|---|---|---|---|
| | Wire size (AWG) | Number of strands | Strand size | Nominal diameter inch(mm) | |
| MACA* | 22 | 7 | 30 | .056(1.42) | .247(6.27) |

1/ Asterisks (*) shall be replaced by the appropriate color designator.
2/ Dimensions are in inches. Metric equivalents are given for information only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issues due to the extensiveness of the changes.

Referenced document. This document references MIL-DTL-27072.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 6145-2012-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T10:55Z
Check the source to verify that this is the current version before use.