MILITARY SPECIFICATION SHEET

TERMINALS AND SEALS, PLUGS AND SWITCH, CASUALTY POWER, RECEPTACLE TYPE, BACK CONNECTED 200-AMPERE, 450-VOLT, ALTERNATING CURRENT, THREE-PHASE, SYMBOL NO. 1046

This specification is approved for use within the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminals described herein shall consist of this specification and the latest issue of MIL-T-24552.


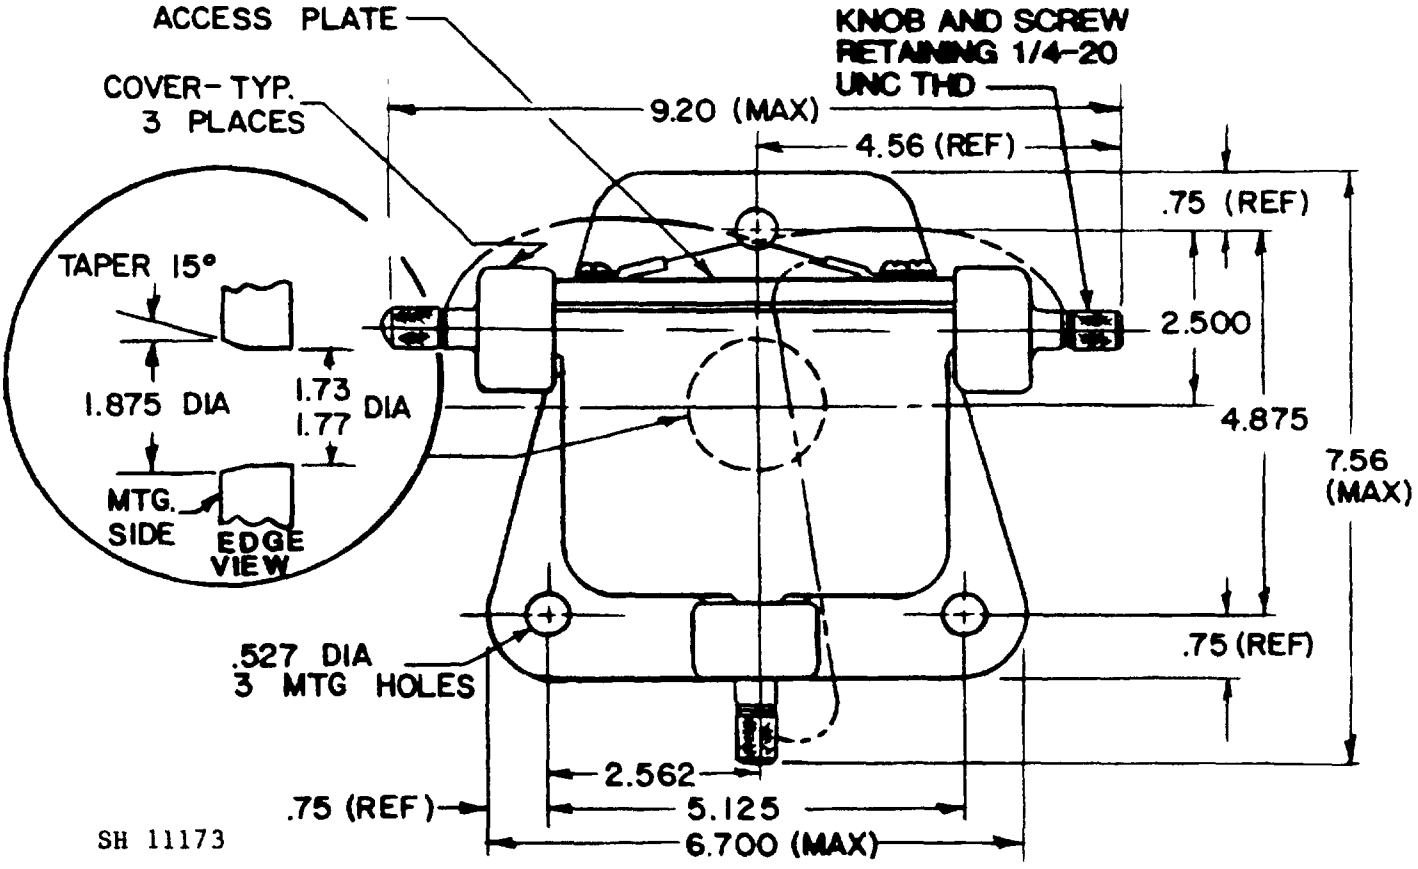


FIGURE 1. Terminal.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:31Z
Check the source to verify that this is the current version before use.

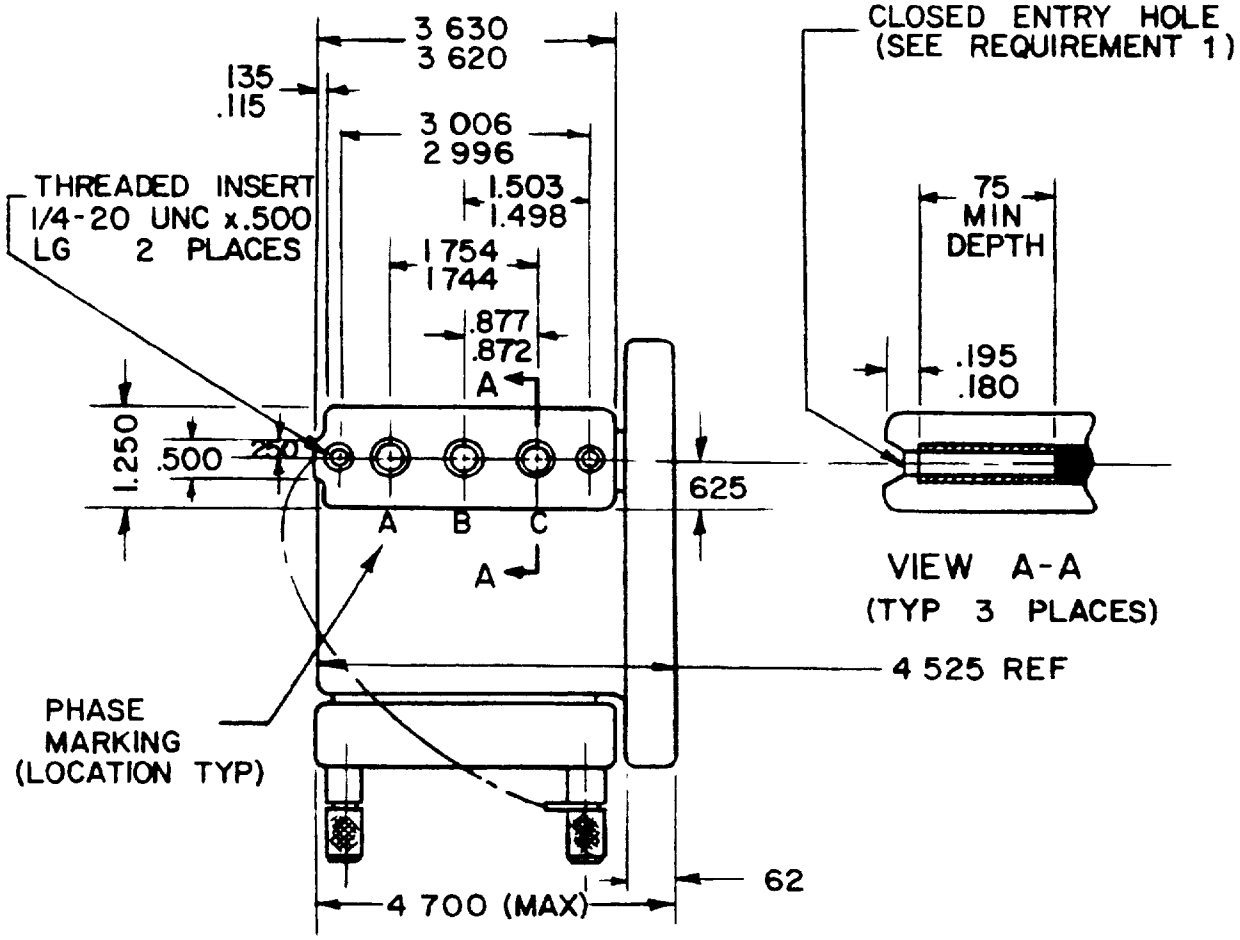

SH 11174

FIGURE 2. Terminal connector (3 places) (view with covers removed).

NOTES:

1. All dimensions are in inches.
2. All tolerances, unless otherwise specified, are plus or minus 0.01 for two place decimals and plus or minus 0.005 for three place decimals. Angular tolerances are plus or minus 1/2 degree.
3. Mating plug: Military Part No. M24552/4-001 (not furnished).
4. Military Part No. M24552/1-001.

REQUIREMENTS:

1. The closed entry hole shall not allow an object greater than 0.31 inch diameter to enter and make contact with receptacle pin.
2. Qualification: Required.

Preparing activity:
Navy - SH
(Project 5940-NB02-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:31Z
Check the source to verify that this is the current version before use.