MILITARY SPECIFICATION SHEET

TERMINALS AND SEALS, PLUGS AND SWITCH, CASUALTY POWER, SEAL, SYMBOL NO. 1048

This specification is approved for use within the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal described herein shall consist of this specification and the latest issue of MIL-T-24552.

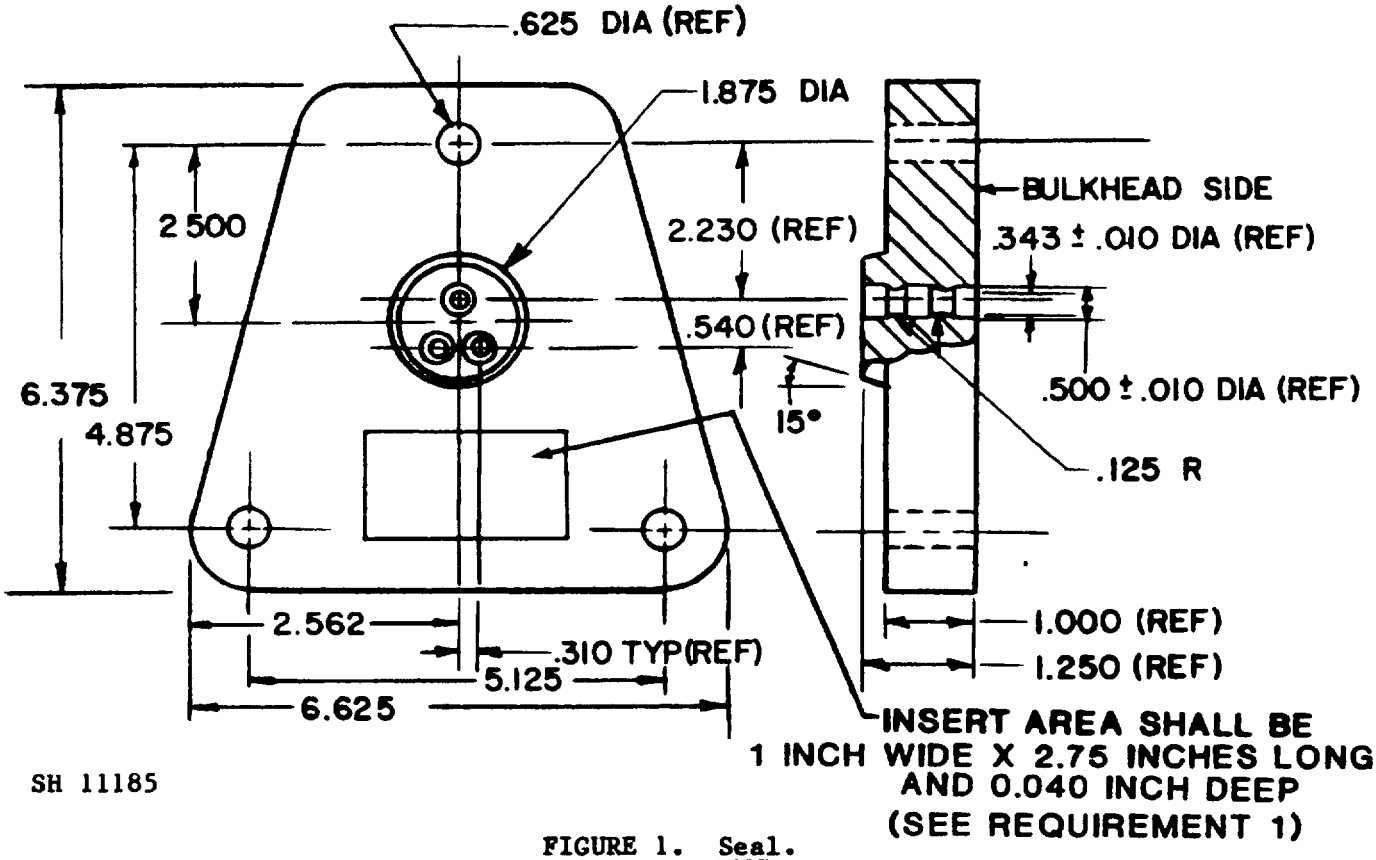


FIGURE 1. Seal.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. All tolerances, unless otherwise specified, are plus or minus 0.030 inch for decimals. Angular tolerances are plus or minus 1/2 degree.
3. Seal is for use with back connected terminal Military Part No. M24552/1-001 for bulkhead terminal applications.
4. Military Part No. M24552/3-001.

REQUIREMENTS:

1. Seal shall be marked with recessed characters at least 0.12 inch high and 0.015 inch deep, with Military Part No., symbol No., manufacturer's name or symbol, and contract number.
2. Qualification: Required.

Preparing activity:
Navy - SH
(Project 5940-NB02-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:32Z
Check the source to verify that this is the current version before use.