MIL-T-24552/4A(SH)
3 November 1986
SUPERSEDING
MIL-T-24552/4(SH)
23 March 1977

MILITARY SPECIFICATION SHEET

TERMINALS AND SEALS, PLUGS AND SWITCH, CASUALTY POWER, PLUG, 100-AMPERE, 450-VOLT, ALTERNATING CURRENT, THREE-PHASE, SYMBOL NO. 1049

This specification is approved for use within the Naval Sea Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal described herein shall consist of this specification and the latest issue of MIL-T-24552.

AMSC N/A
FSC 5940
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:32Z
Check the source to verify that this is the current version before use.

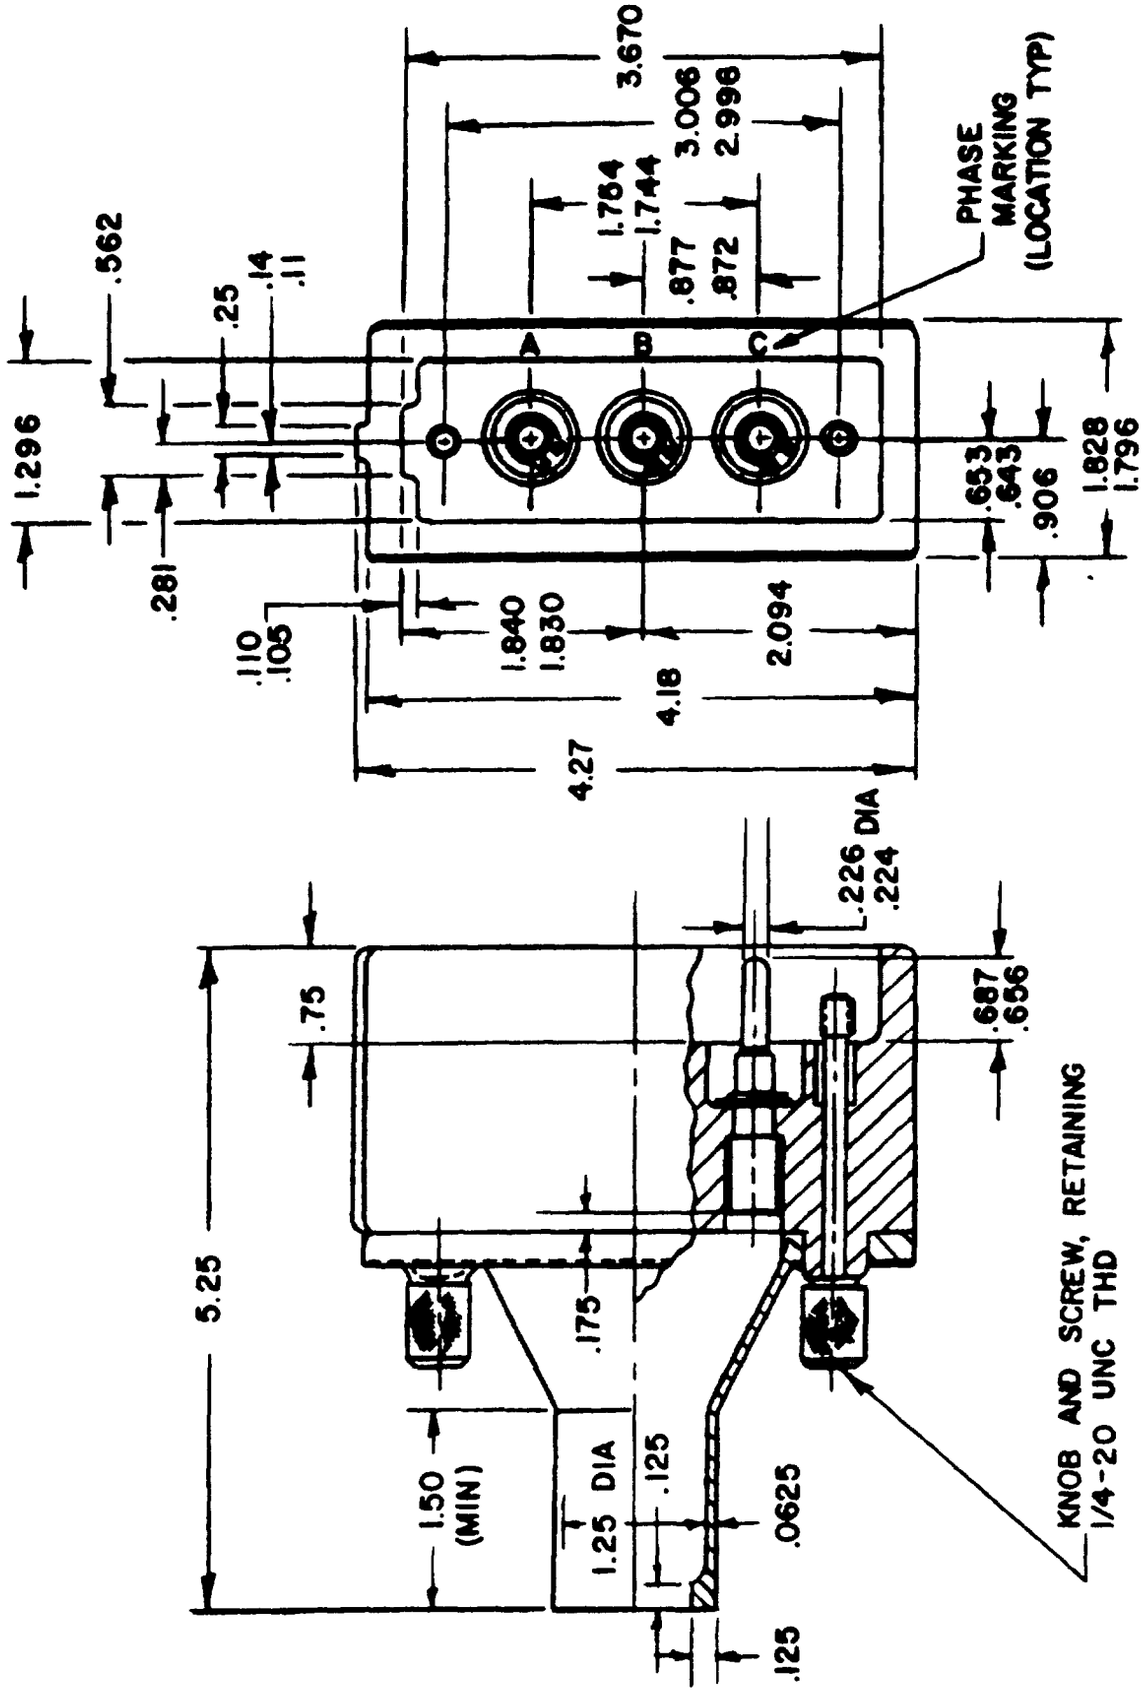


FIGURE 1. Plug.

SH 11186

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. All tolerances, unless otherwise specified, are plus or minus 0.01 for two place decimals and plus or minus 0.005 for three place decimals. Angular tolerances are plus or minus 1/2 degree.
3. Mating terminals: Military Part Nos. M24552/1-001 and M24552/2-001 (not furnished).
4. Military Part No. M24552/4-001.

REQUIREMENT:

1. Qualification: Required.

Preparing activity:
Navy - SH
(Project 5940-NB02-04)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:32Z
Check the source to verify that this is the current version before use.