
MILITARY SPECIFICATION SHEET

# TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), SIX-TERMINAL, 18-WIRE, 600 VOLTS, SYMBOL NO. 520.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the terminal box described herein shall consist of this document and the latest issue of MIL-T-24558(SH).

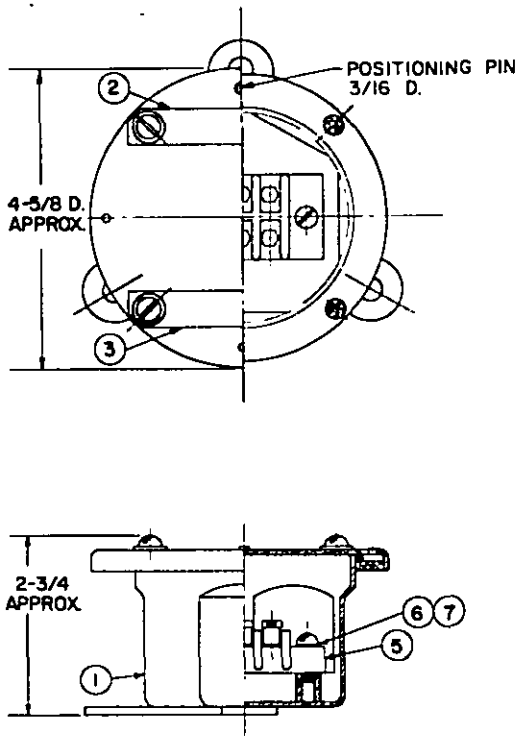


SH 11572


FIGURE 1. Connection box assembly.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.8 of MIL-T-24558.

FSC 5940




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

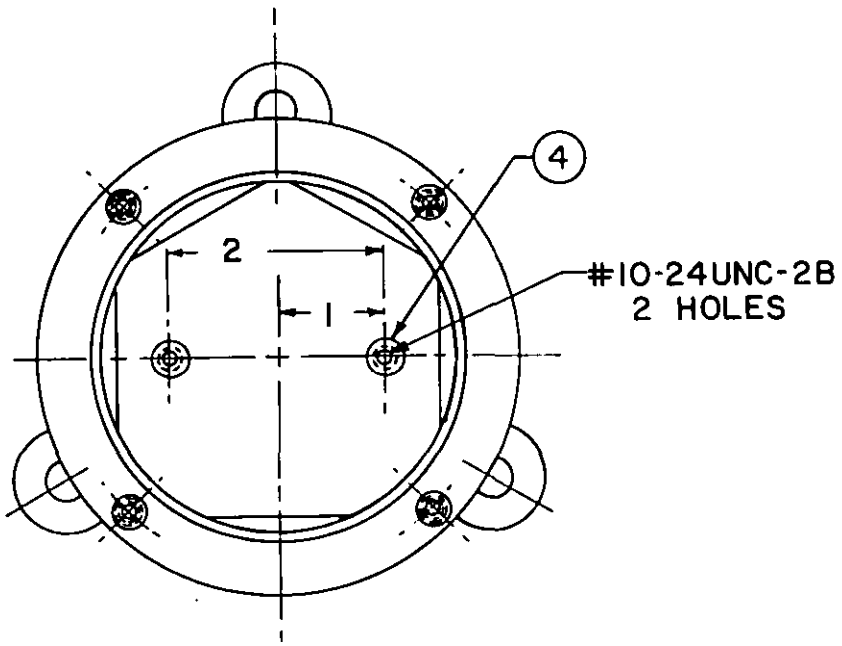


SH 11573

FIGURE 2. Location of terminal board mounting pads.

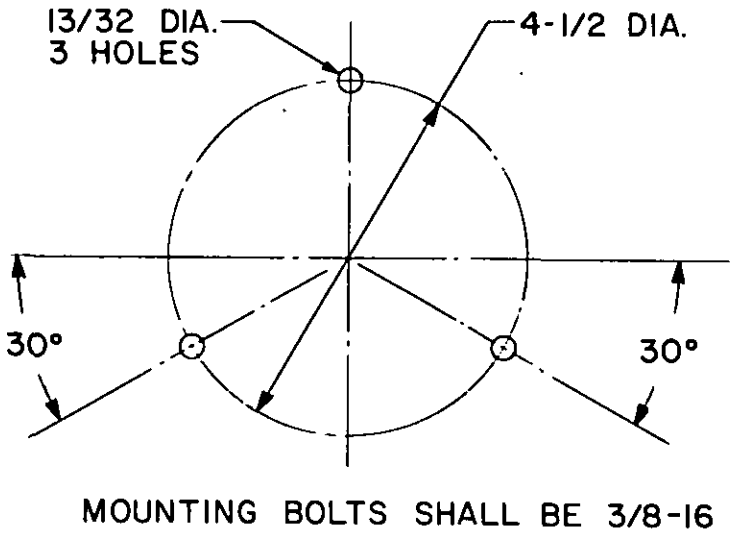


SH 11574

FIGURE 3. Mounting dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 600 volt rms/DC. The maximum current shall be 30 amperes per stud of terminal board.
Dimensions and configuration: See figures 1 through 3.
Standard parts: The standard parts shown in table I shall be used in the construction of the connection box specified herein. Numbers in circles shown on the figures are the same as those shown in "Item" column of table I.
Enclosure: 15 foot submersible.

QUALITY ASSURANCE: First article inspection and Quality conformance inspection shall be as specified in MIL-T-24558.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

(a) Military part number: M24558/1 - 520.1.
(b) Weight: The weight of the connection box shall be 1.8 lbs. maximum.
(c) Formerly covered on NAVSHIPS Drawing No. 9000-S6501-74017.
(d) Overall terminal box dimensions are approximate. Exact dimensions are shown on Military Specification for Item 1, table I.
(e) The maximum number of wires (including spares) shall not exceed three times the number of terminals, and the maximum number of wires to be connected to a single terminal shall not exceed three.

TABLE I. Parts list.

| Item | Description | Qty | Part no. or spec | Remarks |
|---|---|---|---|---|
| 1 | Enclosure assembly, brass[1/] | 1 | MIL-E-24142/5 | M24142/5-001 |
| 2 | Identification plate | 1 | MIL-T-24558 | Figure 6 |
| 3 | Information plate | 1 | MIL-T-24558 | Figure 6 |
| 4 | Mounting pad | 2 | MIL-T-24558 | Figure 5 |
| 5 | Terminal board assembly | 1 | MIL-T-55164/12 | 6TB6 |
| 6 | RH mach screw #10-24x5/8" long | 2 | COML | Brass |
| 7 | Washer for #10 screw | 2 | COML | Bronze |

1/ Box piece 23, cover piece 2 and gasket piece 25 of NAVSHIPS Drawing No. 9000-S6501-74210 may be used as an alternate provided that the box height and mounting details are modified to comply to those specified herein.

Preparing activity:
Navy - SH
(Project 5940-N856-1)



Source: https://assist.dla.mil -- Downloaded: 202610-19T22:35Z
Check the source to verify that this is the current version before use.