INCH-POUND

MIL-DTL-24558/2B
3 October 2011
SUPERSEDING
MIL-DTL-24558/2A
w/AMENDMENT 1
17 February 2006

DETAIL SPECIFICATION SHEET

TERMINAL BOX, CONNECTION, SUBMERSIBLE (15-FOOT), 8-TERMINAL, 32-WIRE, 600 VOLTS, SYMBOL NO. 435.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24558, "Terminal Boxes, Connection, for Electrical and Electronic Systems, General Specification for".

REQUIREMENTS: The terminal box shall be as specified herein and in accordance with table I and figures 1 through 3.

1. Electrical rating. The terminal box shall have an electrical rating of 600 volts root mean square, and 600 volts direct current. The maximum current shall not exceed 40 amperes per stud of terminal board.

2. Dimensions and configuration. For dimensions and configuration see figures 1 through 3. All dimensions in figures 1 through 3 are expressed in decimal inches. Overall terminal box dimensions are approximate. Exact dimensions are shown in MIL-E-24142/5, "Enclosure for Electrical Fittings and Fixtures, Submersible, (15-Foot), Sizes 3R, 4R and 5R".

3. Tolerance. All tolerances not specified herein shall be in accordance with MIL-DTL-24558.

4. Standard parts. The standard parts shown in table I shall be used in the construction of the connection box specified herein. The numbers in circles shown on figures 1 and 2 are the same as those shown in the "Item" column of table I.

5. Enclosure. The enclosure shall be a 15-foot submersible type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

6. Weight. The weight of the connection box shall not exceed 4.0 pounds.

7. Maximum number of wires. The maximum number of wires (including spares) shall not exceed four times the number of terminals. The maximum number of wires to be connected to a single terminal shall not exceed four.

QUALITY ASSURANCE: First article inspection and quality conformance inspection shall be as specified in MIL-DTL-24558.

NOTES:

1. Drawing. The terminal box specified by this specification sheet was formerly covered on NAVSHIPS drawing no. 9000-S6202-74016.

2. Part or identifying number (PIN). The PIN to be used for terminal boxes acquired to this specification is created as follows:

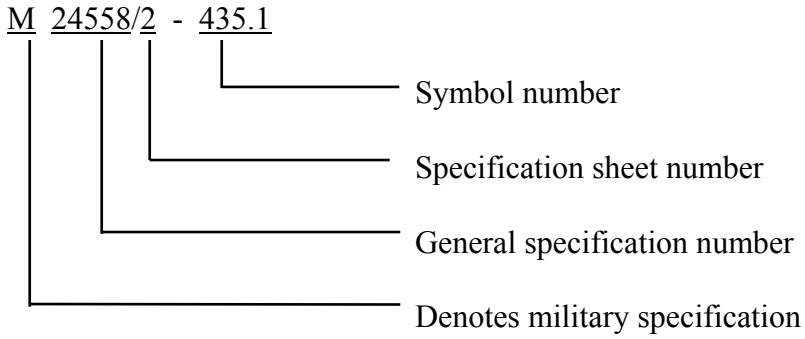


TABLE I. Parts list.

Item	Description	Qty	Part number or specification	Remarks
1	Enclosure assembly, brass	1	MIL-E-24142/5	M24142/5-003
2	Identification plate	1	MIL-DTL-24558	Figure 6
3	Information plate	1	MIL-DTL-24558	Figure 6
4	Mounting bracket	2	MIL-DTL-24558	Figure 3
5	Terminal board assembly	1	A-A-59125/10	4TB8
6	RDH machine screw 10-24 X 0.750	2	Commercial	Brass
7	Washer, #10 external tooth	2	Commercial	Bronze

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

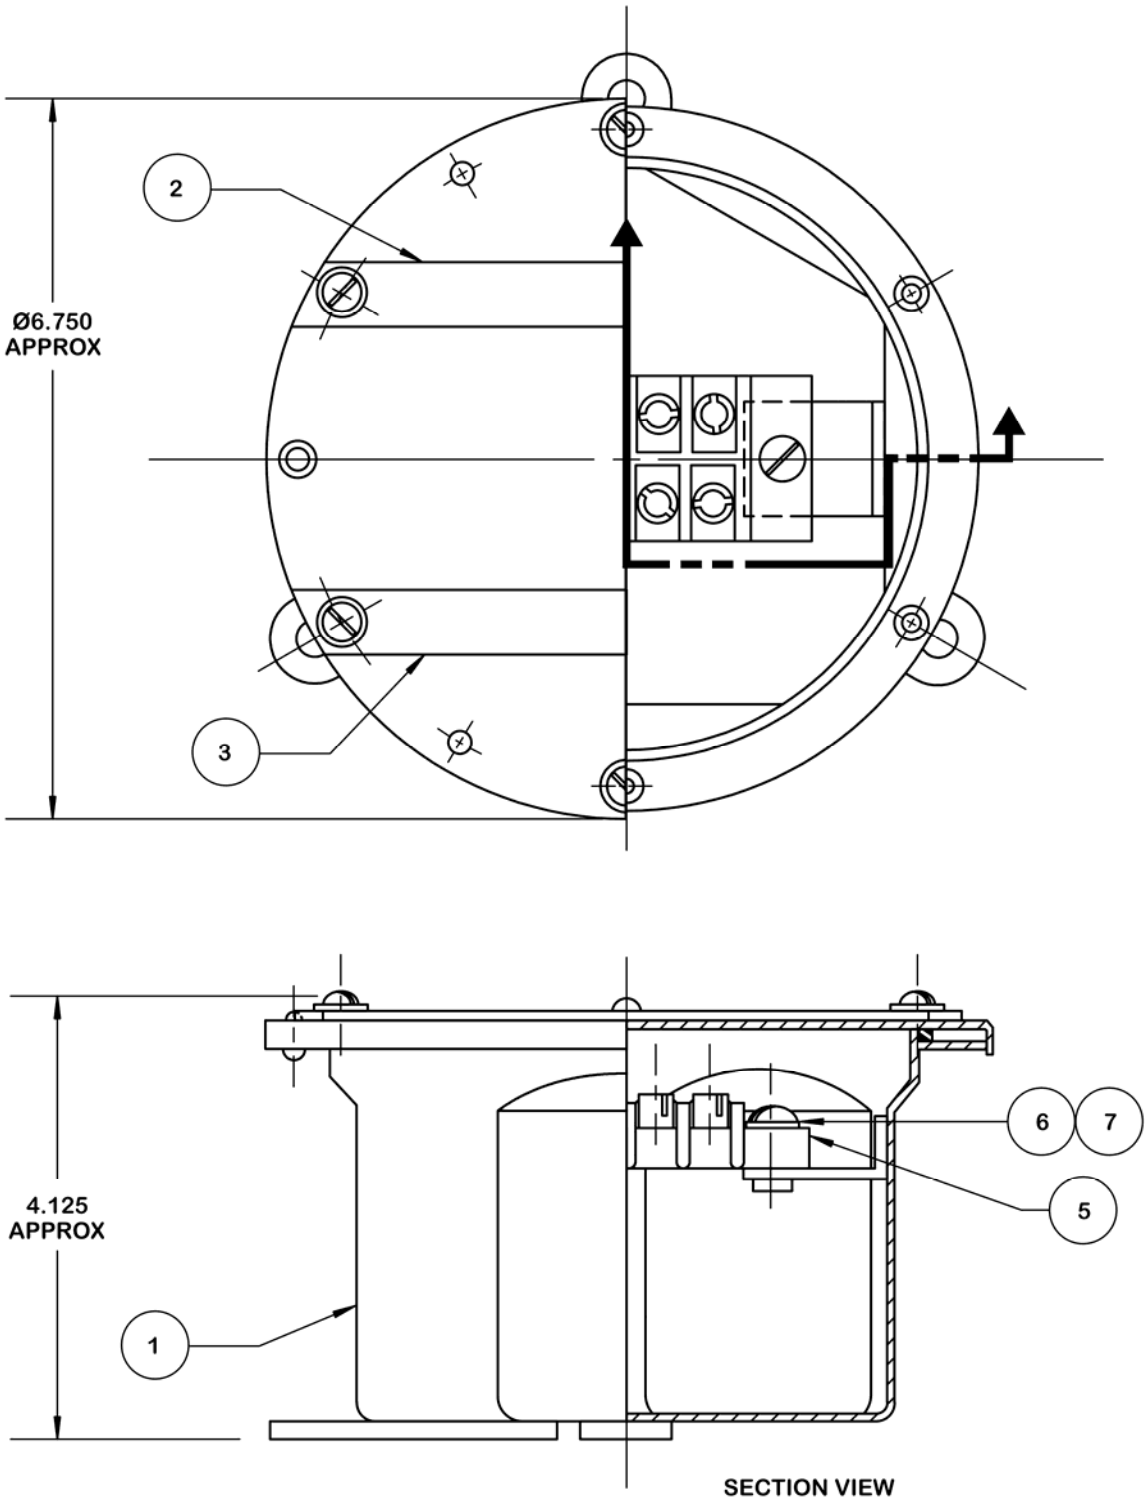


FIGURE 1. Connection box assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

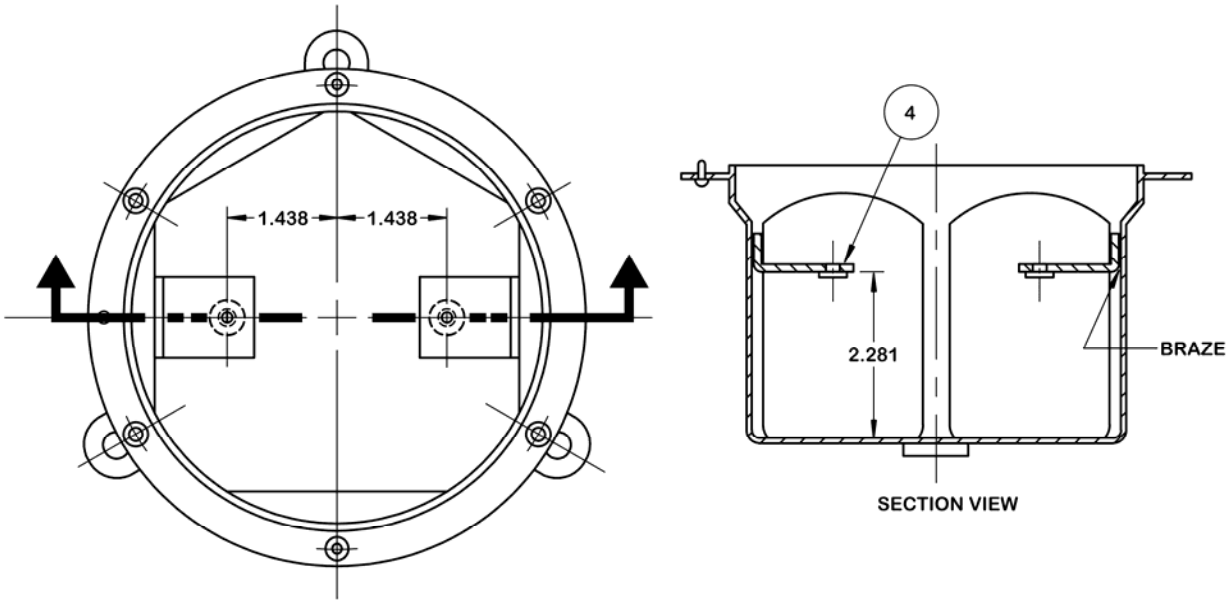


FIGURE 2. Location of terminal board mounting brackets.

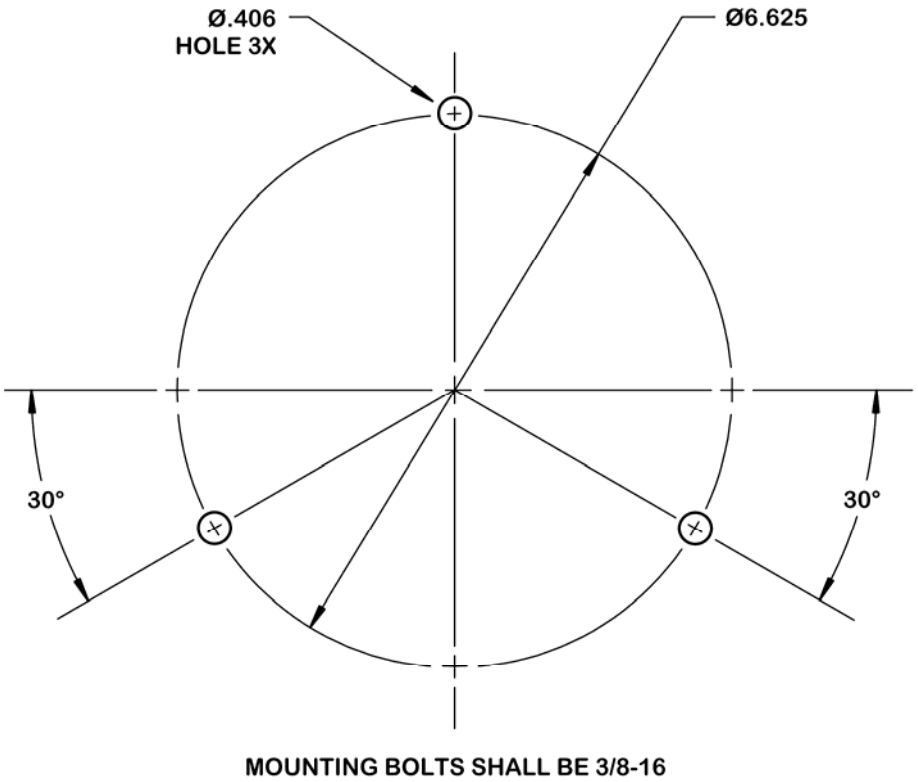


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Navy - SH
DLA - GS

Preparing Activity:
DLA - GS4

(Project 5940-2011-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:35Z
Check the source to verify that this is the current version before use.