METRIC
A-A-50627
9 February 1995

COMMERCIAL ITEM DESCRIPTION

BELL, ELECTRICAL, SHIPBOARD

The General Services Administration has authorized the use of this commercial item description for all Federal Agencies.

1. Abstract. This commercial item description covers various types of bells for alarm and signalling purposes on naval ships.

2. Salient characteristics.

2.1 Mounting. Bells shall be two- or three-point vertically mounted as specified on figure 1. Mounting shall be as specified (see 6.1).

2.2 Enclosure. Bells shall be dripproof, watertight, or explosionproof as specified (see 6.1). Enclosure shall be tapped at the bottom for conduit or cable entrance.


2.2.1 Dripproof enclosure. An enclosure in which the openings are so constructed that drops of liquid or solid particles falling on the enclosure at any angle not greater than 15 degrees from the vertical either cannot enter the enclosure, or if they do enter the enclosure, they will not prevent the successful operation of, or cause damage to, the enclosed equipment (see IEEE 45).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, SEA 03R42, Naval Sea Systems Command, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6350

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

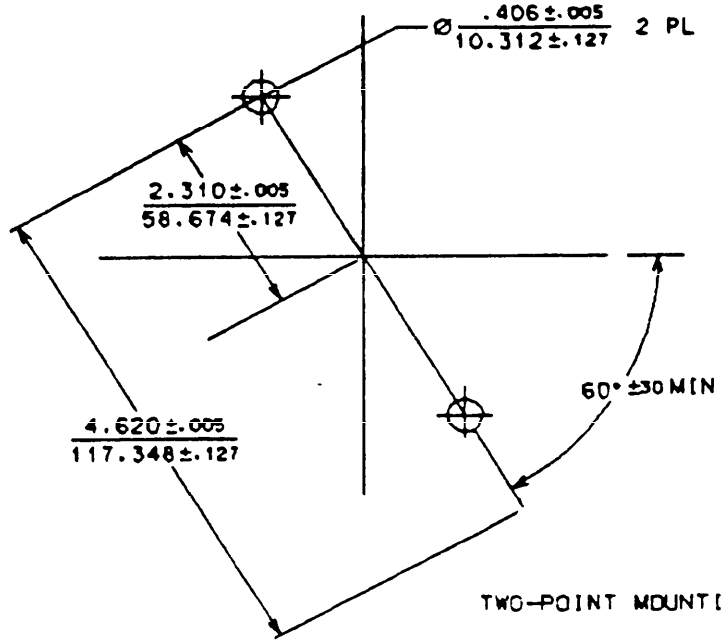

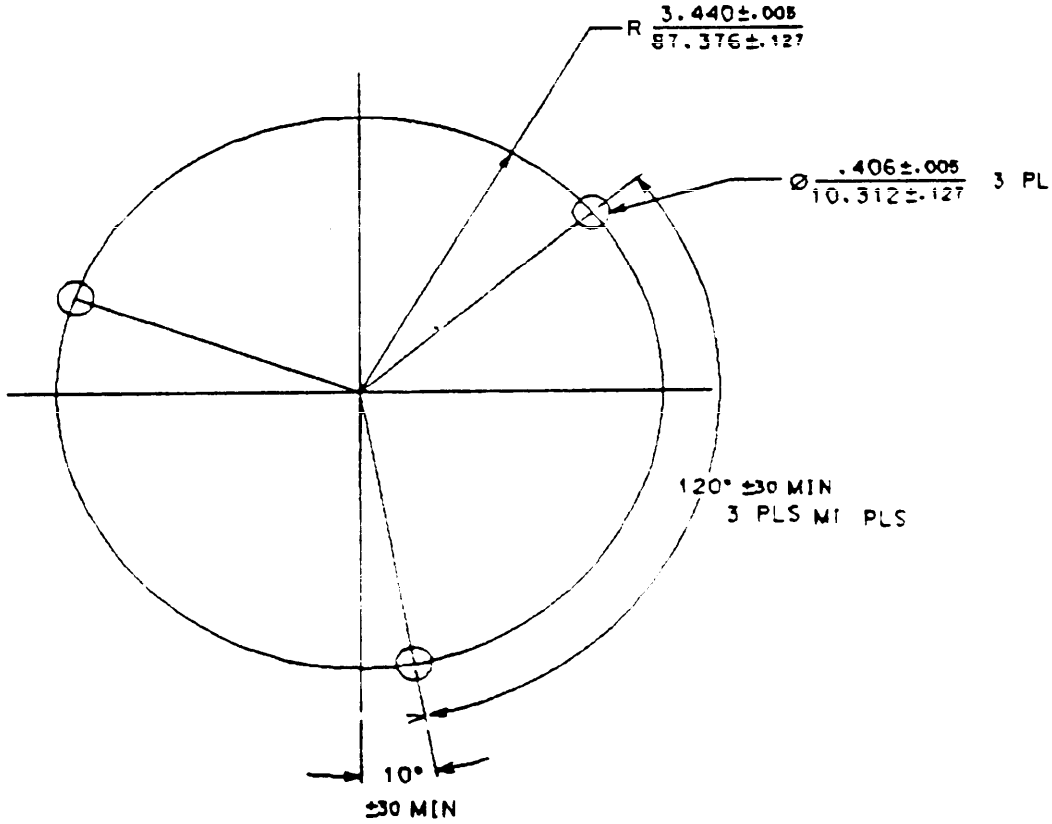


FIGURE 1. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

2.2.2 Watertight enclosure. An enclosure constructed so that a stream of water from a hose not less than 25.4 millimeters (mm) in diameter under a head of 11 meters (m) from a distance of 3 m can be played on the enclosure from any direction for a period of 15 minutes without leakage. The hose nozzle shall have a uniform diameter of 25.4 mm (see IEEE 45).

2.2.3 Explosionproof enclosure. Explosionproof enclosures shall be approved for operation in accordance with NFPA 70, class 1, group D, division 2, hazardous areas.

2.2.4 Grounding and bonding. Metallic enclosures shall be provided with a stud for grounding and bonding. Resistance between tip of the stud and any point of the enclosure or any exposed metallic components shall be zero ohms when measured with a high quality ohmmeter. The stud shall be placed on the left side of the enclosure when viewed from the front of the bell.

2.3 Electrical isolation. Electrical components shall be electrically isolated from the enclosure or any exposed metallic components. Electrical isolation shall be 100 megohm or greater when measured with a high quality, 500-volt megger.

2.4 Types. Bells shall be of the following types:

Size	Output
76.2 mm	73 decibel (dB)
203.2 mm	85 dB
Cowbell	85 dB

Sound pressure output shall be based on a reference of 20 micropascal (μPa), and shall be measured at a distance of 3 m from the bell in accordance with ANSI S1.13.

2.5 Construction. Construction shall be such that no special tools are required for disassembly or reassembly.

2.6 Power. Operating voltages and frequencies shall be as specified (see 6.1). Operating voltages shall be 6, 12, 24, 115, or 440 volts direct current or root mean square (rms) plus or minus 15 percent and operating frequency shall be 60 or 400 hertz (Hz) plus or minus 5 percent.

2.7 Preservation. Parts shall be of suitable corrosion resistance material or materials treated in a satisfactory manner to render them adequately resistant to corrosion.

3. Quality assurance provisions.


3.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

3.2 Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

4. Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

5. CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

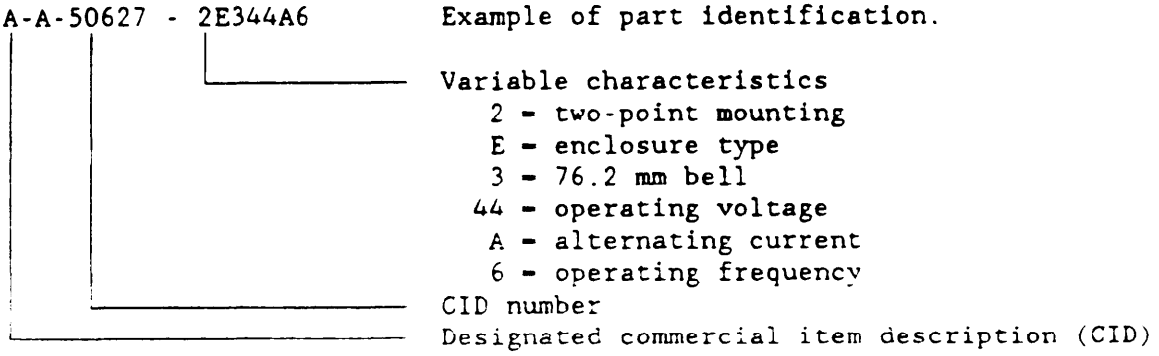

6. Notes.

6.1 Acquisition requirements. Acquisition documents must specify the following:

(a) Mounting.
2 - Two-point
3 - Three-point

(b) Enclosure.
D - Dripproof
W - Watertight
E - Explosionproof

(c) Type.
3 - 76.2 mm
8 - 203.2 mm
C - Cowbell

(d) Power.
06 - 6
12 - 12
24 - 24
11 - 115
44 - 440
D - Direct current
A - Alternating current (rms)
6 - 60 Hz
4 - 400 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

6.2 Documents.

(a) NFPA-70, National Electrical Code, is available from National Fire Protection Association, One Batterymarch Park, P.O. Box 9101, Quincy, MA 02269-9101.

(b) ANSI S1.13, Methods for Measurement of Sound Pressure Levels, is available from American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036.

(c) IEEE 45, Recommended Practice for Electric Installations on Shipboard, is available from Institute of Electrical and Electronic Engineers, Inc., 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331.

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing activity:
Navy - SH
(Project 6350-0137)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-50627	2. DOCUMENT DATE (YYMMDD) 950209

3. DOCUMENT TITLE
BELL, ELECTRICAL, SHIPBOARD

4. NATURE OF CHANGE (identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC) MR. MARK GOUMAS, SEA 03K32 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: DSN: TPOC: 703-602-7191 8-332-7191
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03R42 2531 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:45Z
Check the source to verify that this is the current version before use.