MIL-T-44213(GL)
31 January 1986

MILITARY SPECIFICATION

# TRUNKS, PHYSICAL FITNESS UNIFORM (PFU)

This specification is approved for use within the Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This document covers cotton polyester blend trunks used as a component of the Physical Fitness Uniform.

1.2 Classification. The trunks shall be of one type in the following sizes (see 6.2).

| Sizes | | |
|---|---|---|
| X-Small<br>30-32 | Medium<br>38-40 | X-Large<br>46-48 |
| Small<br>34-36 | Large<br>42-44 | XX-Large<br>50-52 |

## 2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-43548 - Thread, Polyester, Cotton-Covered and Rayon Covered
MIL-T-43624 - Thread, Polyester, Spun
MIL-T-44193 - Thread, Polyester, Textured

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members For Containers and Pallets
MIL-STD-1491 - Glossary of Knitting Imperfections

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Material.

3.3.1 Knitted body cloth. The cloth for the body of the trunks shall be a jersey knit using a cotton polyester blended yarn. The cloth shall conform to the requirements listed below when tested as specified in 4.4.1.1.

| Characteristic | Requirement |
|---|---|
| Weight, ounces per square yard | 5.8 ± 0.5 |
| Wales per inch | 20 (minimum) |
| Courses per inch | 30 (minimum) |
| Bursting strength, pounds | 75 (minimum) |
| Fiber content: | |
| Cotton, percent | 50 ± 5 |
| Polyester | Remainder |

3.3.1.1 Color. The color of the body cloth shall be Heather Gray 467. The cloth shall be piece dyed. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The dye stuff shall be chosen and applied so that the dyed and finish cloth shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.1. When a standard sample is not available, the dyed and finish cloth shall show no more than a slight trace of labile sulfur as defined in the test method specified in 4.4.1.1.

3.3.1.2 Colorfastness. The dyed cloth for the body shall show colorfastness to laundering (after 3 cycles), perspiration, and crocking equal to or better than the standard sample when tested as specified in 4.4.1.1. When no standard sample is available, the dyed cloth shall show "fair" fastness to laundering (after 3 cycles), perspiration, and shall show an AATCC Chromatic Transference Scale rating for crocking not lower than 3.5 when tested as specified in 4.4.1.1.

3.3.1.3 Finish. No materials having a tendency to cause latent tendering or yellowing of the cloth shall be used in any of the dyeing or finishing operations. Resin finishes are prohibited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

3.3.1.3 Nonfibrous material content. The starch and protein content, including chloroform-soluble material of the finished cloth, shall not exceed 6.0 percent when tested as specified in 4.4.1.1.

3.3.1.5 pH. The finished cloth shall have a pH value of not less than 5.0 and not greater than 8.5 when tested as specified in 4.4.1.1.

3.3.2 Liner. The pre-assembled liner to be used in each of the trunks shall be equal to or better than style #B15 of ADS, Inc. Liner sizes shall be identified and matched to trunk sizes as shown in the following manner.

| Liner color identification | Trunks |
|---|---|
| Pattern B blue band | Sizes X-small - Small -Medium |
| Pattern C yellow band | Sizes Large - X-Large |
| Pattern D green band | Sizes XX-Large |

3.3.3 Webbing, elastic for waistband. The elastic webbing for the waistband shall meet the requirements listed below when tested as specified in 4.4.1.1.

| Characteristic: | Requirement |
|---|---|
| Fabrication: | |
| Width (inches) | 1-5/16 ± 1/16 |
| Weight ounces per linear yards | 0.50 (minimum) |
| Construction: | |
| Warp ends/width crocket | 16 (minimum) |
| Elastic strands, full width | 14 (minimum) |
| Filling yarns per inch | 46 (minimum) |
| Fiber content: | |
| Warp yarn (crocket) | Polyester |
| Elastic strands Spandex | |
| Filling yarn | Polyester |

3.3.4 Thread. The thread for the trunks shall be a 50/2 spun polyester conforming to MIL-T-43624 or an equivalent cotton-covered or rayon covered staple polyester conforming to MIL-T-43548 or a high tenacity, textured polyester conforming to type II, class 1 of MIL-T-44193. The color of the thread shall be Gray TW, C.A. 66086.

3.3.4.1 Thread colorfastness. The thread shall show colorfastness to laundering, perspiration, and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration, and light.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

3.3.5 Label. Each of the trunks shall have a combination size, identification and instruction label conforming to type VI, class 14 of DDD-L-20. The label shall show fastness to laundering. The body of the instruction label shall be as follows:

CARE INSTRUCTIONS

Hand or machine wash in cold or warm water (maximum 120°F.)
Do not Bleach or Iron. Tumble dry at low or medium setting (maximum 160°F).

3.4 Design. The trunks shall be a boxer style and have a covered elastic waistband, a key or change pocket upper right front, leg slits, and a full liner (see figure 1).

3.5 Construction. The construction shall conform in all respects to the requirements specified in table I and herein. Figure 1 is furnished solely for guidance and information. Should variation from the document appear in figure 1, the document shall govern.

3.5.1 Stitches, seams, and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trunks.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Ends of continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.5.1.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

minimum of 1/4 inch beyond the defective area onto the existing stitching. Loose or excess-ively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.5.1.2 Type 401, 503, 504, and 506 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1a. and 3.5.1.1.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. 301 stitching may be used to repair 401 stitching.

3.6 Manufacturing operations requirements. The trunks shall be manufactured in accordance with all operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

| NO. | TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 1. | Cutting.<br><br>All component parts shall be cut lengthwise in the direction of the wales. | | | | | | |
| 2. | Replacement of defective components.<br><br>Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages as specified in table IV are excluded and replaced with non-defective and properly matched material. | | | | | | |
| 3. | Shade and size markings.<br><br>a. Mark, ticket or bundle all parts to insure a uniform shade, size and properly assembly of trunks.<br><br>b. Any method of marking may be used except:<br><br>1. Metal fastening devices.<br>2. Sew on type tickets.<br>3. Adhesive type tickets which leave traces of adhesive on the material after removal of the ticket. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 4. | Make pocket. | | | | | | |
| | a. Overedge the end of change pocket to be turned down for hem. | 503 | | 8-12 | 50/2 | 50/2 | 50/2 |
| | b. Turn overedged end of pocket to backside 1 inch and hem. | 301 or 401 | EFa-1 | 8-12 | 50/2 | 50/2 | |
| | c. With face sides to outside, stitch sides and bottom of pocket, rounding corners off the bottom and overedging sides of extension above pocket opening. | 504 | SSa-1 | 8-12 | 50/2 | 50/2 | 50/2 |
| 5. | Trunk assembly | | | | | | |
| | a. Join fronts and backs leaving side slits opened. Close crotch seam. | 504 | SSa-1 | 8-12 | 50/2 | 50/2 | 50/2 |
| | b. Insert the body assembly into the pre-assembled liner, face side to face side, and sew to the elastic waistband, with the elastic next to the body cloth and the seam of the elastic waistband superimposed on the back trunks seam. Insert the top extension of the pocket into the seam, between the liner and the trunks body, with the pocket opening facing the trunks body, 1 ± 1/4 inch from the left side seam on the left front panel of the trunks. | 504 | SSa-1 | 8-12 | 50/2 | 50/2 | 50/2 |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 5. | Trunk assembly. (cont'd) | | | | | | |
| | c. Fold the top edge of the trunks body cloth 1-1/4 ± 1/8 inch around the elastic webbing and stitch through to cover the elastic on both sides, taking care that the liner and pocket are pulled back away so as not to be caught in the stitching. There shall be three rows of stitching, 5/16 inch apart, the top row being 5/16 ± 1/16 inch from the top edge of the waistband. The stitching shall begin and end at the back seam, with 1/2 to 1 inch of overlapped stitches. | 401 | EFa-3 | 8-12 | 50/2 | 50/2 | |
| 6. | Hem legs. | | | | | | |
| | Hem the bottom of each leg opening by turning to the inside 3/4 ± 1/8 inch and stitching. | 406 | EFa-2 | 8-12 | 50/2 | 50/2 | 50/2 |
| 7. | Make vents. | | | | | | |
| | a. Beginning at the bottom of each sideseam (after hemming), stitch 2 inches up each sideseam with an overedge machine so that the vent is overedged. Overedge back down to the bottom on the other side of the vent by turning at the top of the vent. | 503 | EFd-1 | 8-12 | 50/2 | 50/2 | 50/2 |
| | b. Fold the vents to the inside and hem 3/16 inch from the folded edge. | 301 | EFa-1 | 8-12 | 50/2 | 50/2 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 8. | Attach label.<br><br>Sew label on elastic waistband directly above back seam centered on elastic waistband. | 301 | SSa-1 | 8-12 | 50/2 | 50/2 | |
| 9. | Tacking.<br><br>The ends of all stitches when not caught in other seams or stitching (except for hem seams) shall be securely tacked by stitching back into the seams any ends of stitching chain. | 504 | | 8-12 | 50/2 | 50/2 | |
| 10. | Clean trunks.<br><br>Trim all thread ends and remove loose threads. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. Sizes and finished measurements shall conform to the requirements shown in table II. All measurements shall be in inches.

TABLE II. Finished measurements

| Size | Waist relaxed 1/ | Waist extended 2/ | Front rise 3/ | Outseam 4/ | Thigh 5/ | Leg opening 6/ | Slit 7/ |
|---|---|---|---|---|---|---|---|
| X-Small | 9 | 14 | 11-1/2 | 13 | 9-1/2 | 8-1/2 | 2 |
| Small | 10 | 16 | 12 | 13-1/2 | 10-1/2 | 9-1/2 | 2 |
| Medium | 11 | 18 | 12-1/2 | 14 | 11-1/2 | 10-1/2 | 2 |
| Large | 12 | 20 | 13 | 14-1/2 | 12-1/2 | 11-1/2 | 2 |
| X-Large | 13 | 22 | 13-1/2 | 15 | 13-1/2 | 12-1/2 | 2 |
| XX-Large | 14 | 24 | 14 | 15-1/2 | 14-1/2 | 13-1/2 | 2 |
| Tolerance | ± 1 | +2/-1/2 | ± 1/2 | ± 1/2 | +1/-1/2 | +1/-1/2 | ± 1/8 |

1/ Waist relaxed - measure across top of trunks laying flat.

2/ Waist extended - measure across top of trunks while stretching waist.

3/ Front rise - measure along front center seam from bottom of elastic waisband to crotch seam.

4/ Outseam - measure along sideseam from top of trunks to leg slit.

5/ Thigh - approximately 7 inches down from waist, measure from front center seam to side seam.

6/ Leg opening - measure from side slit to folded edge when trunks are laid down flat.

7/ Slit - measure from beginning of slit to leg bottom.

3.8 Shrinkage. The completed trunks shall not shrink nor elongate more than 10 percent in width or length when tested as specified in 4.4.4.

3.9 Workmanship. The completed trunks shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless otherwise disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be preformed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Material certification. Unless otherwise specified, a certificate of compliance will be accepted as evidence that the material characteristics listed in table III conform to the specific requirements when tested by the specified methods.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE III. Material tests

| Material | Characteristic | Requirement paragraph | Test method 1/ |
|---|---|---|---|
| Jersey knit cloth for body | Type of knit | 3.3.1 | Visual |
| | Cotton identification | 3.3.1 | 1200 |
| | Polyester identification | 3.3.1 | 1600 |
| | Fiber content | 3.3.1 | 2535 |
| | Weight | 3.3.1 | 5041 |
| | Wales and courses per inch | 3.3.1 | 5070 |
| | Bursting strength | 3.3.1 | 5120 |
| | Fiber content | 3.3.1 | 2535 |
| | Labile sulfur | 3.3.1.1 | 2020 |
| | Colorfastness to: | | |
| | Laundering | 3.3.1.2 | 5614 2/ |
| | Perspiration | 3.3.1.2 | 5680 |
| | Crocking | 3.3.1.2 | 5651 |
| | Nonfibrous material | 3.3.1.4 | 2611 |
| | pH | 3.3.1.5 | 2811 |
| Elastic webbing | Type of knit | 3.3.3 | Visual |
| | Weight | 3.3.3 | 5041 |
| | Width | 3.3.3 | Visual |
| | Yarns: | | |
| | Warp, full width | 3.3.3 | 5050 |
| | Elastic strands, full width | 3.3.3 | 5050 |
| | Filling yarns per inch | 3.3.3 | 5050 |
| | Material identification | 3.3.3 | 1600 |

1/ Specified methods shall be in accordance with FED-STD-191.

2/ Use three laundering cycles with drying after each cycle.

4.4.2 End item visual examination. The end item shall be examined for the defects listed in table IV. The lot size shall be expressed in units of trunks. The sample unit shall be one of the trunks. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects and 4.0 for total (major and minor combined) defects. The material defects shall be as defined in MIL-STD-1491.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Material | Any hole, cut, tear, drop stitch, thin area, or mend. | X | |
| | Any slub more than twice the thickness of normal yarn. | | X |
| | Any accumulation of slubs, clearly visible, causing nonuniform overall appearance. 1/ | | X |
| | Rowey yarn or tiger stripes, loose knitting causing sleaziness, or giving the appearance of shade bars. | | X |
| | Birdseye or miss-knit. | | X |
| | Color not as specified. | X | |
| Shade | Variation in shade within a part or between two or more parts. | | X |
| | Streaks clearly visible. | | X |
| Thread | Not type, size, or color specified. | X | |
| Cleanness | Spot or stain on outside (largest dimension any direction) -More than 1/4 inch up to 1/2 inch inclusive | | X |
| | -More than 1/2 inch. | X | |
| | Two or more untrimmed ends more than 1 inch in length inside or outside. | | X |
| Components | Any component missing or other than specified. | X | |
| Seams and stitching | Any seam twisted, puckered, or pulled, affecting appearance. | X | |
| | Needle chews. | X | |
| | Tight tension (stitches break when normal strain is applied to seam or stitching). | X | |
| | Loose tension resulting in a loosely secured seam. | | X |
| | Any part of trunks badly pleated, or caught or twisted in any unrelated row of stitching. | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Seam type | Wrong seam type. | X | |
| Stitch type | Wrong stitch type. | X | |
| Stitches per inch | Number of stitches per inch less than minimum or more than maximum specified. | | X |
| Stitching repair | Not as specified. | X | |
| Open seam (any broken stitch of two or more continuous skipped stitches) | Any open seam, except on hems. | X | |
| | Any open seam on hems 1/2 inch or more. | | X |
| Hem | Omitted. | X | |
| | Width of hem not uniform throughout. | | X |
| | Width of hem less than 5/8 or more than 7/8 inches. | | X |
| Label | Omitted, incorrect, illegible, or misplaced. | X | |
| | Not type or size specified. | | X |

1/ At normal inspection distance (approximately 3 feet).

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table II. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of trunks. The sample unit shall be one of the trunks. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 End item shrinkage testing. The end item shall be tested for shrinkage as specified in Method 7556 of FED-STD-191 except that after drying the trunks shall be conditioned for 1 hour in a relaxed state before measuring. The trunks shall not be moistened or pressed before measuring. The measurements shall be taken to the nearest 0.1 inch with the trunks laid flat. The trunks shall meet the shrinkage requirements specified in 3.8. Any dimension not within the specified tolerance shall be classified as a defect. The lot shall be expressed in units of trunks. The sample unit shall be one of the trunks. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

4.4.5 Packaging inspection. An inspection shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

| Examine | Defect |
|---|---|
| Marking (exterior and interior) | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |
| Materials | Any component missing, or not as specified.<br>Any component damaged, affecting serviceability. |
| Workmanship | Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling.<br>Bulged or distorted container.<br>Polyethylene bag heat sealed seams open, non-continuous or crooked; vent hole missing or greater than 1/4 inch diameter.<br>Incorrectly fabricated bag. |
| Content | Number of polyethylene bagged unit packs per shipping container is more or less than specified.<br>Number of trunks per polyethylene bag is more or less than specified. 1/ |

1/ For this defect, four polyethylene bagged unit packs shall be examined from each shipping container in the sample.

4.4.6 Palletization inspection. An inspection shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

| Examine | Defect |
|---|---|
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each of the trunks shall be neatly folded to approximate 8 by 8 inches and inserted in a close-fitting clear polyethylene bag. The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag shall be fabricated from polyethylene film tube or sheeting. The final closure of the bag may be heat sealed or a reverse flap or tuck. A 1/4 inch diameter hole shall be made at one corner of the bag to allow air to escape.

5.1.2 Commercial. The trunks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Seventy-two of the trunks of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. The inside dimensions of each shipping container shall approximate 24 inches in length, 16 inches in width and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2 Level B packing. Seventy-two of the trunks of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, minimum grade 200 of PPP-B-636. The inside dimensions of each shipping container shall approximate 24 inches in length, 16 inches in width and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Trunks of one size only, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), trunks packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special markings required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Stock number
Nomenclature
Size
Quantity

6. NOTES

6.1 Intended use. The trunks are intended for use by Military personnel of the Department of Defense for a physical fitness program.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Sizes required (see 1.2).
c. When a first article is required (see 3.2, 4.3, and 6.4).
d. Selection of the applicable level of preservation and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

6.3 Sample. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8415-A500



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

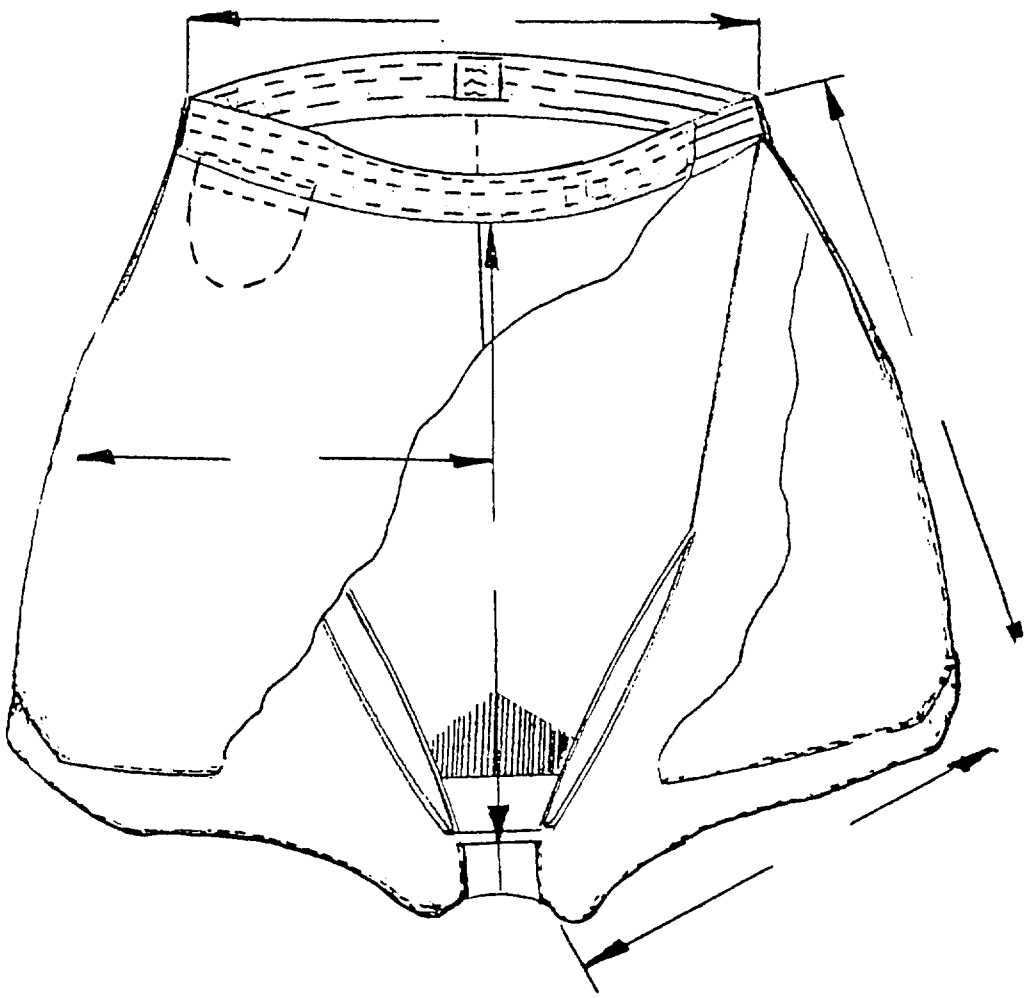


FIG 1 · TRUNKS
PHYSICAL FITNESS UNIFORM
CUT-AWAY VIEW 2-1-1629

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

**OFFICIAL BUSINESS**
**PENALTY FOR PRIVATE USE $300**

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-T-44213(GL) | Trunks, Physical Fitness Uniform (PFU) |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil - Downloaded: 2026-10-22T00:39Z
Check the source to verify that this is the current version before use.