MILITARY SPECIFICATION

T-SHIRT, PHYSICAL FITNESS UNIFORM (PFU)

This specification is approved for use within Natick Research, Development, and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a cotton polyester blend short sleeve, crew neck T-shirt, used as a component of the Physical Fitness Uniform.

1.2 Classification. The T-shirt shall be of one type in the following sizes (see 6.2).

X-Small (30-32)	Large (42-44)
Small (34-36)	X-Large (46-48)
Medium (38-40)	XX-Large (50-52)

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-43548 - Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-T-43624 - Thread, Polyester, Spun
MIL-T-44193 - Thread, Polyester, Textured

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1491 - Glossary of Knitting Imperfections

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.4).

3.3 Material.

3.3.1 Cloth, knitted, for body. The cloth shall be jersey knit using a cotton/polyester blend yarn. The cloth shall conform to the requirements listed below when tested as specified in 4.4.1.

Characteristic	Requirement
Weight, ounces per square yard	5.8 ± 0.5
Wales per inch	20 (minimum)
Courses per inch	30 (minimum)
Bursting strength, pounds	75 (minimum)
Fiber content, percent:	
Cotton	50 ± 5
Polyester	Remainder

3.3.2 Cloth, knitted, for collarette. The cloth shall be 1 by 1 rib knit using a cotton/polyester blend yarn. The cloth shall conform to the requirements listed below when tested as specified in 4.4.1.

Characteristic	Requirement
Weight, ounces per square yard	7.4 ± 0.5
Wales per inch	24 (minimum)
Courses per inch	32 (minimum)
Bursting strength, pounds	75 (minimum)
Fiber content, percent:	
Cotton	50 ± 5
Polyester	Remainder

3.3.3 Color. The color of the jersey knit body and rib knit collarette cloth shall be Heather Gray 467.

3.3.3.1 Labile sulfur. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The dyes shall be chosen and applied so that the dyed and finished cloth shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1. When a standard sample is not available, the dyed and finished cloth shall show no more than a slight trace of labile sulfur when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

3.3.3.2 Colorfasteners. The dyed cloths for body and collarette shall show colorfastness to laundering (after three cycles), perspiration, and crocking equal to or better than the standard sample when tested as specified in 4.4.1. When no standard sample is available the dyed cloth shall show "fair" fastness to laundering (after three cycles) perspiration and show an AATTCC chromatic transference scale rating for crocking not lower than 3.5 when tested as specified in 4.4.1.

3.3.4 Nonfibrous material content. The starch and protein content, including chloroform-soluble material of the finished cloths for body collarette shall not exceed 6.0 percent when tested as specified in 4.4.1.

3.3.5 Finish. No material having a tendency to cause latent, tendering or yellowing of the cloth shall be used in any of the dyeing or finishing operations. Resin finishes are prohibited.

3.3.5.1 Preshrinking process. The cloths for body and collarette shall be preshrunk by a mechanical shrinking process before being cut into T-shirts such that the T-shirts shall meet the demensional stability requirements specified in 3.8. The preshrinking process used shall not be identified by name or trade mark on the T-shirt or package.

3.3.5.2 pH. The finished cloth for body and collarette shall have a pH value not less than 5.0 and not greater than 8.5 when tested as specified in 4.4.1.

3.3.6 Thread. The thread for the T-shirts shall be a 50/2 spun polyester conforming to MIL-T-43624 or an equivalent cotton covered or rayon covered staple polyester conforming to MIL-T-43548, or a high tenacity, textured polyester approximately 45 TEX conforming to type II, class 1 of MIL-T-44193. The color of the thread shall be Gray TW, C.A. 66086.

3.3.6.1 Thread colorfastness. The thread shall show colorfastness to laundering, perspiration, and light, equal to or better than the standard sample. When no standard sample is available the dyed thread shall show "good" fastness to laundering, perspiration, and light.

3.3.7 Labels. Each of the T-shirts shall have a combination size, identification, and instruction label conforming to type VI, class 14 of DDD-L-20. The label shall show fastness to laundering. The body of the instruction label shall be as follows:

CARE INSTRUCTIONS

Hand or machine wash in cold or warm water (max. 120 degrees F.). Do not Bleach or Iron. Tumble dry at low or medium setting (max. 160 degrees F.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

3.4 Design. The T-shirt shall have a crew neck and short sleeves. The collar will be finished with a collarette (see figure 1).

3.5 Construction. The construction shall conform in all respects to the requirements specified in table I and herein. Figure 1 is furnished solely for guidance and information. Should variation from the document appear in figure 1, the document shall govern.

3.5.1 Stitches, seams and stitching. Stitch, seam and stitching types shall conform to FED-STD-751. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching.

3.5.2 Overedge stitching. The gage of the overedge stitching shall be 3/16 ± 1/16 inch. The guide and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric.

3.5.3 Marking. The black "ARMY" marking shall be screen printed on the front of the T-shirt as shown in figure I. Letters shall measure 3 ± 1/4 inches high and shall be positioned 3 ± 1/4 inches down from collarette seam. Printing shall show colorfastness for a minimum of 15 laundering and dryings when tested as specified in 4.4.1.1.

3.6 Manufacturing operations requirements. The T-shirt shall be manufactured in accordance with all operations specified in table I. The contractor is not required to follow the exact sequence of operations as long as all requirements are met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

Table I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1	Cutting. All component parts shall be cut lengthwise in the direction of the wales except for the collarette which shall be cut with wales running side to side.						
2	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects and damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.						
3	Seam shoulder. Close one shoulder including reinforcement tape in seam.	504	SSa-1	8-12	50/2	50/2	
4	Attach collarette. Seam double thickness collarette to T-shirt neck opening covering all raw edges and catching label at center back. Collarette width shall finish 1 ± 1/8 inch wide.	406	Bsb-1	8-12	50/2	50/2	
5	Seam shoulder. Close remaining shoulder seam and collarette including reinforcement tape and tacking collarette end.	504	SSa-1	8-12	50/2	50/2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

Table I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6	Sleeves.						
	a. Hem sleeve bottom (s) to finish 1 ± 1/4 inch wide. Hem shall be stitched over the first end of stitching not less than 1 inch.	503	EFc-1	8-12	50/2	50/2	
	b. Close sleeve along the underarm	504	SSa-1	8-12	50/2	50/2	
	c. Set sleeves to armholes	504	SSa-1	8-12	50/2	50/2	
7	Hem bottom.						
	Hem bottom of T-shirt to finish 1 ± 1/4 inch wide. The stitching shall overlap not less than 1 inch.	503	EFc-1	8-12	50/2	50/2	
8	Tacking.						
	The ends of all stitches when not caught in other seams or stitching (except for hem seams and overseaming of collarette) shall be securely tacked by the following method.						
	The first and last ends of stitching chain shall be stitched back into the seam by means of appropriate mechanical device for 1 inch.						
9	Clean T-shirt.						
	a. Trim and remove any ends of thread of stitching inside and outside of T-shirt.						
	b. Remove all spots and stains.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. Sizes and finished measurements shall conform to the requirements shown in table II and all measurements shall be in inches.

TABLE II. Finished measurements (in inches)

Size	Width 1/	Length 2/	Neck opening 3/	Armhole 4/	Sleeve under 5/	Sleeve over 6/	Sleeve opening 7/
X-small	16	27	16	8-1/2	3	6-1/4	5-3/4
Small	18	28	17	9	3-1/2	7	6-1/4
Medium	20	29	18	9-1/2	4	7-3/4	6-3/4
Large	22	30	19	10	4-1/2	8-1/2	7-1/4
X-large	24	31	20	10-1/2	5	9-1/4	7-3/4
XX-large	26	32	21	11	5-1/2	10	8-1/4
Tolerance	± 1	± 1	± 1	± 1/2	± 1/2	± 1/2	± 1/2

1/ Width - from side to side with T-shirt laying flat but not stretched.

2/ Length - from bottom edge to junction of shoulder seam and collarette.

3/ Neck opening - grasp collarette at center back and center front, form a straight line, measure, and multiply by 2.

4/ Armhole - lay T-shirt flat but not stretched and measure from top of sleeve at shoulder to bottom of under arm.

5/ Sleeve under - from bottom of under arm seam to end of arm hem.

6/ Sleeve over - from top of sleeve at shoulder seam to end of arm hem.

7/ Sleeve opening - from folded edge to folded edge when arm hem is layed flat.

3.8 Shrinkage. The completed T-shirts shall not shrink nor elongate more than 10 percent in width or length when tested as specified in 4.4.4.

3.9 Workmanship. The finished T-shirt shall conform to the quality of product established by this document. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his or any

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Material certification. Unless otherwise specified, a certificate of compliance will be acceptable as evidence that the material characteristics listed in table III conform to the specified requirements when tested by the specified methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

TABLE III. Material tests

Material	Characteristic	Requirement paragraph	Test method 1/
Jersey knit cloth for body and rib knit cloth for collarette	Type of knit	3.3.1 and 3.3.2	Visual
	Cotton identification	3.3.1 and 3.3.2	1200
	Polyester identification	3.3.1 and 3.3.2	1600
	Weight	3.3.1 and 3.3.2	5041
	Wales and courses per inch	3.3.1 and 3.3.2	5070
	Bursting strength	3.3.1 and 3.3.2	5120
	Fiber content	3.3.1 and 3.3.2	2535
	Labile sulfur	3.3.3.1	2020
	Colorfastness to:		
	Laundering	3.3.3.2	5614 2/
	Perspiration	3.3.3.2	5680
	Crocking	3.3.3.2	5651
	Nonfibrous material	3.3.4	2611
	pH	3.3.5.2	2811
Screen printing on jersey knit	Color fastness to:		
	Laundering	3.5.4	5614 3/

1/ Specified methods shall be in accordance with FED-STD-191.

2/ Use three laundering cycles with drying after each cycle.

3/ Use fifteen laundering cycles with drying after each cycle.

4.4.2 End item visual examination. The end item shall be examined for the defects listed in table IV. The lot size shall be expressed in units of T-shirts. The sample unit shall be one T-shirt. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects and 4.0 for total (major and minor combined) defects. The material defects shall be defined as in MIL-STD-1491.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor
Material	Any hole, cut, tear, drop stitch, thin area, or mend.	X	
	Any slub more than twice the thickness of normal yarn.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Material (cont'd)	Any accumulation of slubs, clearly visible, causing nonuniform overall appearance. 1/		X
	Rowey yarn or tiger stripes, loose knitting causing sleaziness, or giving the appearance of shade bars.		X
	Birdseye or miss-knit.		X
	Color not as specified	X	
Shade	Variation in shade within a part or between two or more parts		X
	Streaks clearly visible		X
Thread	Not type, size, or color specified.	X	
Cleanness	Spot or stain on outside (largest dimension any direction): -More than 1/4 inch up to 1/2 inch inclusive.		X
	-More than 1/2 inch.	X	
	Two or more untrimmed ends more than 1 inch in length inside or outside.		X
Components	Any component missing or other than specified.	X	
Seams and stitching	Any seam twisted, puckered, or pulled, affecting appearance.		X
	Needle chews.	X	
	Tight tension (stitches break when normal strain is applied to seam or stitching).		X
	Loose tension resulting in a loosely secured seam.		X
	Any part of T-shirt badly pleated, or caught or twisted in any unrelated row of stitching.	X	
Seam type	Wrong seam type.	X	
Stitch type	Wrong stitch type.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Stitches per inch	Number of stitches per inch less than minimum or more than maximum specified.		X
Stitching repair	Not as specified	X	
Open seam (any broken stitch or two or more continuous skipped	Any open seam, except on hems.	X	
	Any open seam on hems 1/2 inch or more.		X
Stitches skipped or broken (stitches skipped or broken on same row of stitching but not amounting to an open seam)	Skipped or broken stitches more than 1/2 inch.	X	
Tacks	Tack omitted on collarette.	X	
	Tack misplaced on collarette not serving purpose intended.	X	
	Tack insecure on collarette.		X
Marking	Any "ARMY" marking omitted, incorrect, illegible, or misplaced.	X	
	Not applied as specified.	X	
	Not size specified.	X	
Colarette	Not double thickness of ribbed cloth.	X	
	Improperly attached to body affecting appearance or serviceability.	X	
	Other than type specified.	X	
	Collarette not uniform in width.		X
	Width less than 7/8 inch or more than 1-1/8 inches.		X
Hem, sleeves and bottom	Omitted.	X	
	Width of hem not uniform throughout.		X
	Width or hem less than 3/4 inch or more than 1-1/4 inches.		X
	Hem not stitched over first end of stitching by at least 1 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Labeling, size and identification	Omitted, incorrect, illegible, or misplaced.		X
	Not type or size specified.		X

1/ At normal inspection distance (approximately 3 feet).

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table II. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of T-shirts. The sample unit shall be one T-shirt. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 End item shrinkage test. The end item shall be tested for shrinkage as specified in Method 7556 of FED-STD-191 except that after drying the T-shirt shall be conditioned for 1 hour in a relaxed state before measuring. The T-shirt shall not be moistened or pressed before measuring. The measurements shall be taken to the nearest 0.1 inch with the T-shirts laid flat. The T-shirt shall meet the shrinkage requirements specified in 3.8. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of T-shirts. The sample unit shall be one T-shirt. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging inspection. An inspection shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing or not as specified. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship (cont'd)	Bulged or distorted container. Polyethylene bag heat sealed seams open, non-continuous or crooked; vent hole missing or greater than 1/4 inch diameter. Incorrectly fabricated bag.
Content	Number of polyethylene bagged unit packs per shipping container is more or less than specified. Number of T-shirts per polyethylene bag is more or less than specified. 1/

1/ For this defect, four polyethylene bagged unit packs shall be examined from each shipping container in the sample.

4.4.6 Palletization inspection. Inspection shall be made to determine that the palletization complies with the section 5 requirements. Pallet type shall by type 1 (4-way entry), type III, type IV or type V in accordance with MIL-STD-147. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each T-shirt shall be neatly folded to approximate 11 by 8 inches and inserted in a close-fitting clear polyethylene bag. The bag shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tube or sheeting. The final closure of the bag may be heat-sealed or a reverse flap or tuck. A 1/4 inch diameter hole shall be made at one corner of the bag to allow air to escape.

5.1.2 Commercial. The T-shirt shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Ninety-six T-shirts of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. The inside dimensions of each shipping container shall approximate 22-1/2 inches in length, 16-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced in accordance with the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2 Level B packing. Ninety-six T-shirts of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, minimum grade 200 of PPP-B-636. The inside dimensions of each shipping container shall approximate 22-1/2 inches in length, 16-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III, as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. T-shirts of one size only, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), T-shirts, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load types 1a of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number (3) in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special markings required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6 NOTES

6.1 Intended use. The T-shirts are intended for use by Military Personnel of the Department of the Defense for physical fitness program.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required it shall be inspected and approved under the appropriate provisions of FAR 52.209. The contracting officer should include specific instruction in all acquisition documents regarding arrangements for inspection approval of the first article.

Custodian:

Army - GL

Preparing activity:

Army - GL

Project No. 8415-A501

Review activities:

Army - MD
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

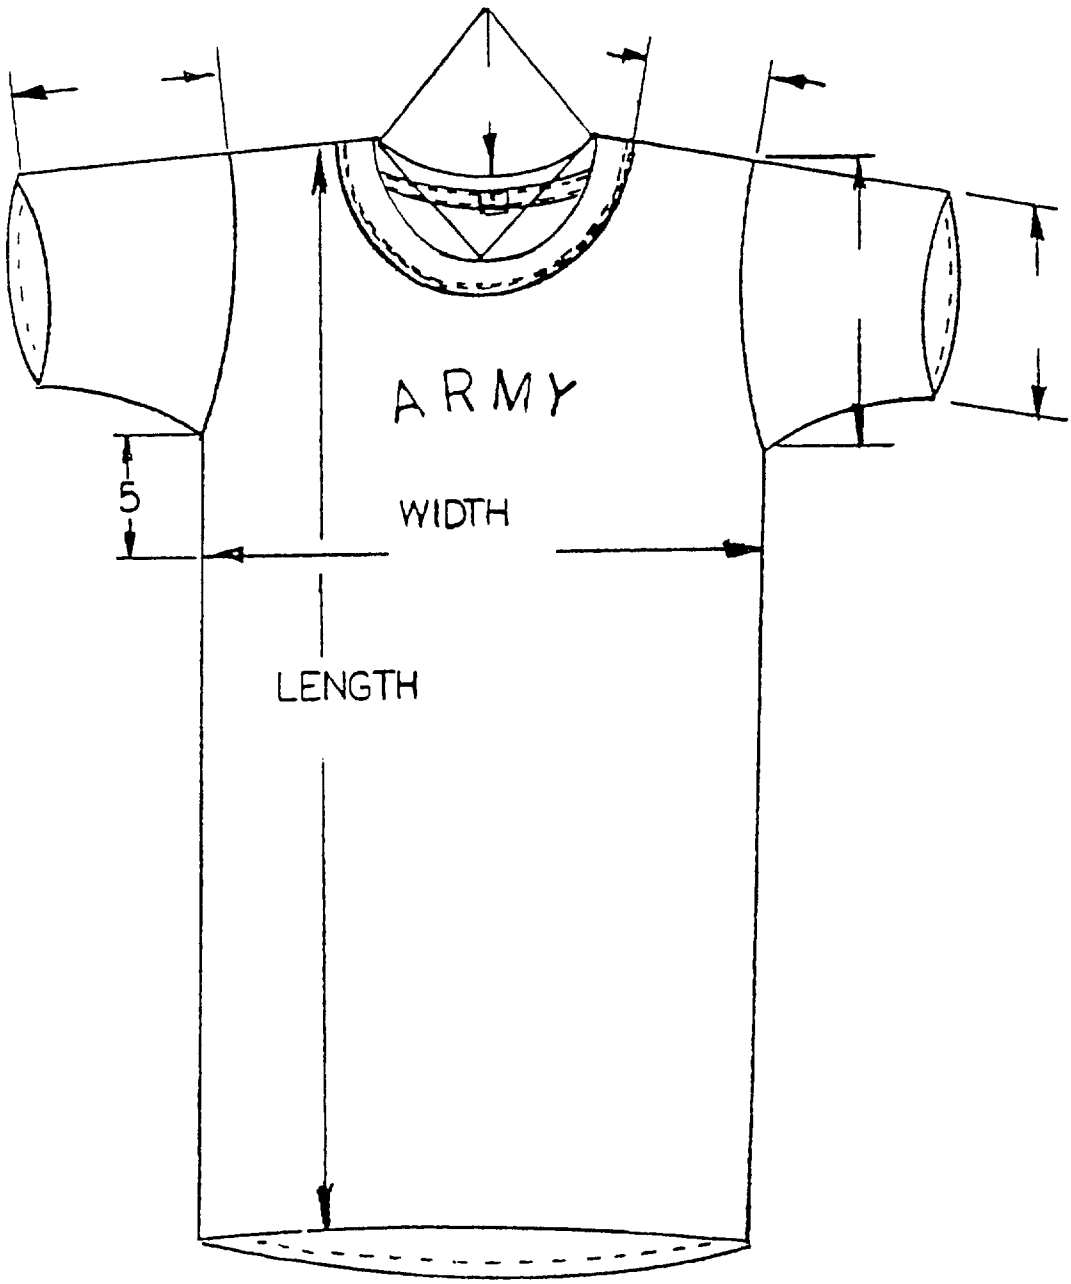


FIG. 1 T-SHIRT
PHYSICAL FITNESS UNIFORM

2-1-1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US ARMY NATICK RESEARCH
and DEVELOPMENT CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Commander
US Army Natick Research
and Development Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-44214(GL)	T-Shirt, Physical Fitness Uniform (PFU)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil – Downloaded: 2026-10-22T00:40Z
Check the source to verify that this is the current version before use.