INCH-POUND

MIL-M-28787/178B
AMENDMENT 2
31 March 1993
SUPERSEDING
AMENDMENT 1
14 September 1984

MILITARY SPECIFICATION

*MODULES, STANDARD ELECTRONIC

DRIVER, FET, SWITCH, DIGITAL, KEY CODE GDP

This amendment forms a part of Military Specification MIL-M-28787/178B(EC), dated 27 April 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 6

*4.4.2: Delete and substitute the following:

"4.4.2 Order of testing. Test conditions A through Q shall be performed in any order with the following exceptions. Test conditions A and C are stress tests and shall be performed only at 25 ± 5°C. If test conditions A or C are part of a sequence of tests, the order of testing shall be as follows: A and C where applicable, followed by the remaining tests in the sequence."

*4.5.3: Delete and substitute the following:

"4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests D through Q shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements in table I. Following the return of the module to 25 ± 5°C, electrical tests D through L shall be performed in the order specified in 4.4.2 using the 25 ± 5°C ambient end-of-life requirements in table I."

PAGE 12

*FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 26

TABLE VIII: Delete and substitute new table VIII as printed on page 4 of this amendment.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:29Z
Check the source to verify that this is the current version before use.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0162)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:29Z
Check the source to verify that this is the current version before use.

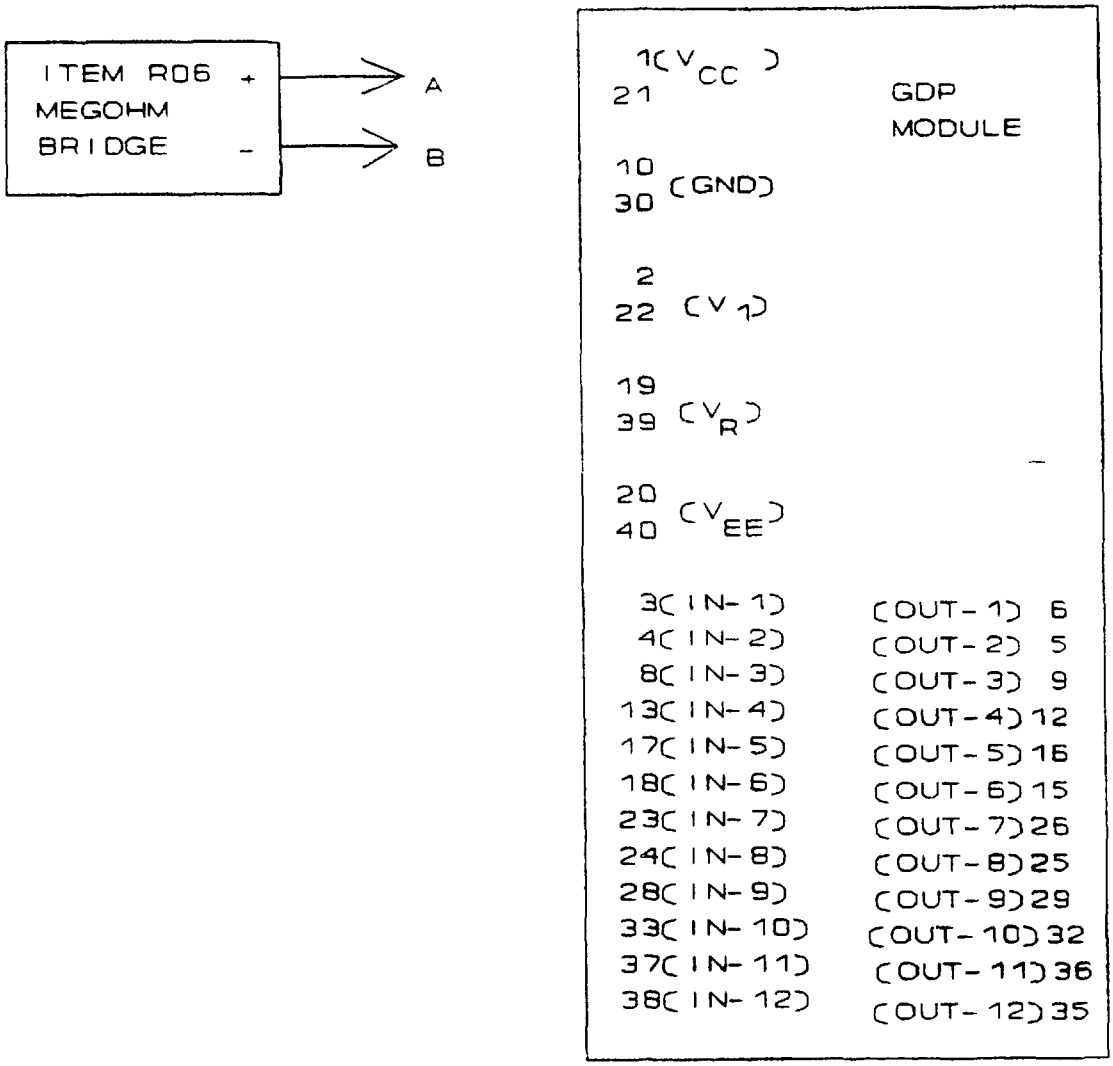

WARNING:
When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

NOTES:

1. **For test condition C1, the megohm bridge voltage shall be 100 ± 10 Vdc.**
2. **For test conditions C2 through C7, the megohm bridge voltage shall be 30 ± 3 Vdc.**
3. **For test condition C1, penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.**

FIGURE 5. Isolation test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:29Z
Check the source to verify that this is the current version before use.

TABLE VIII. Output crosstalk (low-level and high-level) test - Continued.

Test cond	Parameter	Connect				Initial limits 25°C ± 5°C ambient		Unit	Test fig
		A to pin	B to pin	C to pin	D to pin	Min	Max		
M9	OUT-9 Output crosstalk, low level	3,4,8,13, 17,18,23, 24,33,37, 38	29	Open	28	0	1	V	11, 12
M10	OUT-10 Output crosstalk, low level	3,4,8,13, 17,18,23, 24,28,37, 38	32	Open	33	0	1	V	11, 12
M11	OUT-11 Output crosstalk, low level	3,4,8,13, 17,18,23, 24,28,33, 38	36	Open	37	0	1	V	11, 12
M12	OUT-12 Output crosstalk, low level	3,4,8,13, 17,18,23, 24,28,33, 37	35	Open	38	0	1	V	11, 12
N1	OUT-1 Output crosstalk, high level	4,8,13, 17,18,23, 24,28,33, 37,38	6	3	Open	0	800	mV	11, 12
N2	OUT-2 Output crosstalk, high level	3,8,13, 17,18,23, 24,28,33, 37,38	5	4	Open	0	800	mV	11, 12
N3	OUT-3 Output crosstalk, high level	3,4,13, 17,18,23, 24,28,33, 37,38	9	8	Open	0	800	mV	11, 12
N4	OUT-4 Output crosstalk, high level	3,4,8, 17,18,23, 24,28,33, 37,38	12	13	Open	0	800	mV	11, 12

Source: https://assist.dla.mil -- Downloaded: 202640-20T16:29Z
Check the source to verify that this is the current version before use.