INCH-POUND

MIL-M-28787/182A
AMENDMENT 1
30 September 1992

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

DEMULTIPLEXER, ANALOG, KEY CODE VGS

This amendment forms a part of Military Specification MIL-M-28787/182A(EC), dated 12 October 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 23

FIGURE 10: Delete and substitute new figure 10 as printed on page 2 of this amendment.

Custodians:
Army - ER
Navy - SH
Air Force - 85


Preparing activity:
Navy - NW

(Project 5963-0165)

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:30Z
Check the source to verify that this is the current version before use.

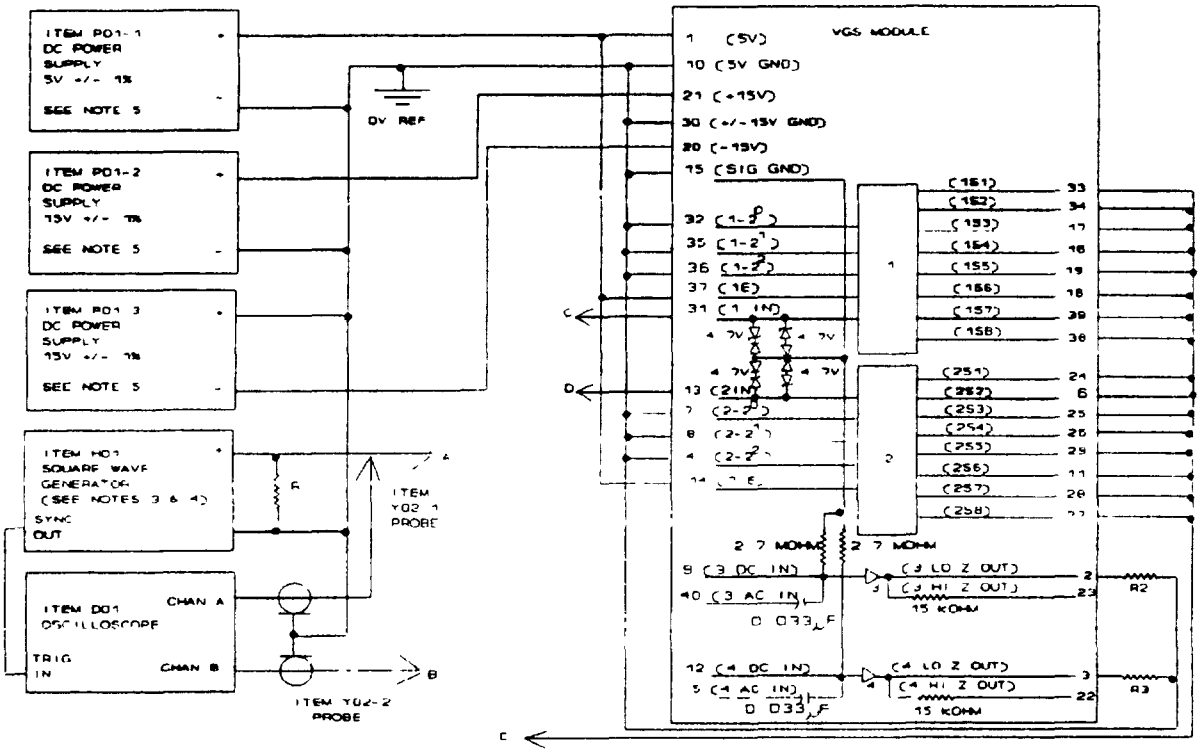

NOTES:
1. R1 = 600Ω ± 5%, 1W.
2. R2 = R3 = 10 kΩ ± 1%, 1/4W.
3. Item H01 setup for test condition F:
   Amplitude = 8.0 ± 0.5 Vp-p
   Frequency = 1 kHz ± 10%.
4. Item H01 setup for test condition G:
   Amplitude = 20 Vp-p ± 10%.
   Frequency = 10 kHz ± 10%.
5. Turn on items P01-1, P01-2, and P01-3 prior to applying signal from item H01 to the module. Turn off item H01 before turning off P01-1, P01-2, and P01-3. Module damage will result if the sequence is not followed.

FIGURE 10. Power supply transient amplitude and slew rate check test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:30Z
Check the source to verify that this is the current version before use.