MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TRANSFORMER, SCOTT-T, ANALOG, KEY CODE STT

This amendment forms a part of MIL-M-28787/185B(EC), dated 3 February 1982, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

TABLE I, Test condition G, max columns: Delete "186" (four places) and substitute "188" (four places).

PAGE 5

TABLE I, Test condition S, max columns: Delete "186" (four places) and substitute "188" (four places).

PAGE 15

FIGURE 5: Delete and substitute new figure 5 as printed on page 3 of this amendment.

PAGE 24

FIGURE 8, WARNING: Delete the last sentence and substitute the following: "Always set the voltage to zero before connecting or disconnecting the test leads or inserting or removing the STT module".

PAGE 25

TABLE VIII, Min limits column: Delete "180.0" and substitute "180".

TABLE VIII, Max limits column: Delete "186.0" and substitute "188".

PAGE 29

FIGURE 9, WARNING: Delete the last sentence and substitute the following: "Always set the voltage to zero before connecting or disconnecting the test leads or inserting or removing the STT module".

PAGE 33

FIGURE II, WARNING: Delete the last sentence and substitute the following: "Always set the voltage to zero before connecting or disconnecting the test leads or inserting or removing the STT module".

PAGE 42

FIGURE 15: Delete "SYNCHRO 11TC4c" and substitute "CONTROL TRANS 11CT4c".

PAGE 43

FIGURE 15, WARNING: Delete the last sentence and substitute the following: "Always set the voltage to zero before connecting or disconnecting the leads or inserting or removing the STT module".

PAGE 46

TABLE XVIII, Min limits column: Delete "180.0" and substitute "180".

TABLE XVIII, Max limits column: Delete "186.0" and substitute "188".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:31Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

PAGE 49

FIGURE 17, WARNING: Delete the last sentence and substitute the following: "Always set the voltage to zero before connecting or disconnecting the test leads or inserting or removing the STT module".

FIGURE 17, Note 8: Delete "AA" and substitute "S" and delete "BB" and substitute "T".


FIGURE 17, Note 9: Delete "AA" and substitute "S" and delete "BB" and substitute "T".

FIGURE 17, Note 10: Delete "BB1-BB18" and substitute "T1-T18".

FIGURE 17, Note 11: Delete "BB1-BB18" and substitute "T1-T18" and delete "BB10-BB18" and substitute "T10-T18".

FIGURE 17, Note 12: Delete "BB1-BB18" and substitute "S and T1-T18".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:31Z
Check the source to verify that this is the current version before use.

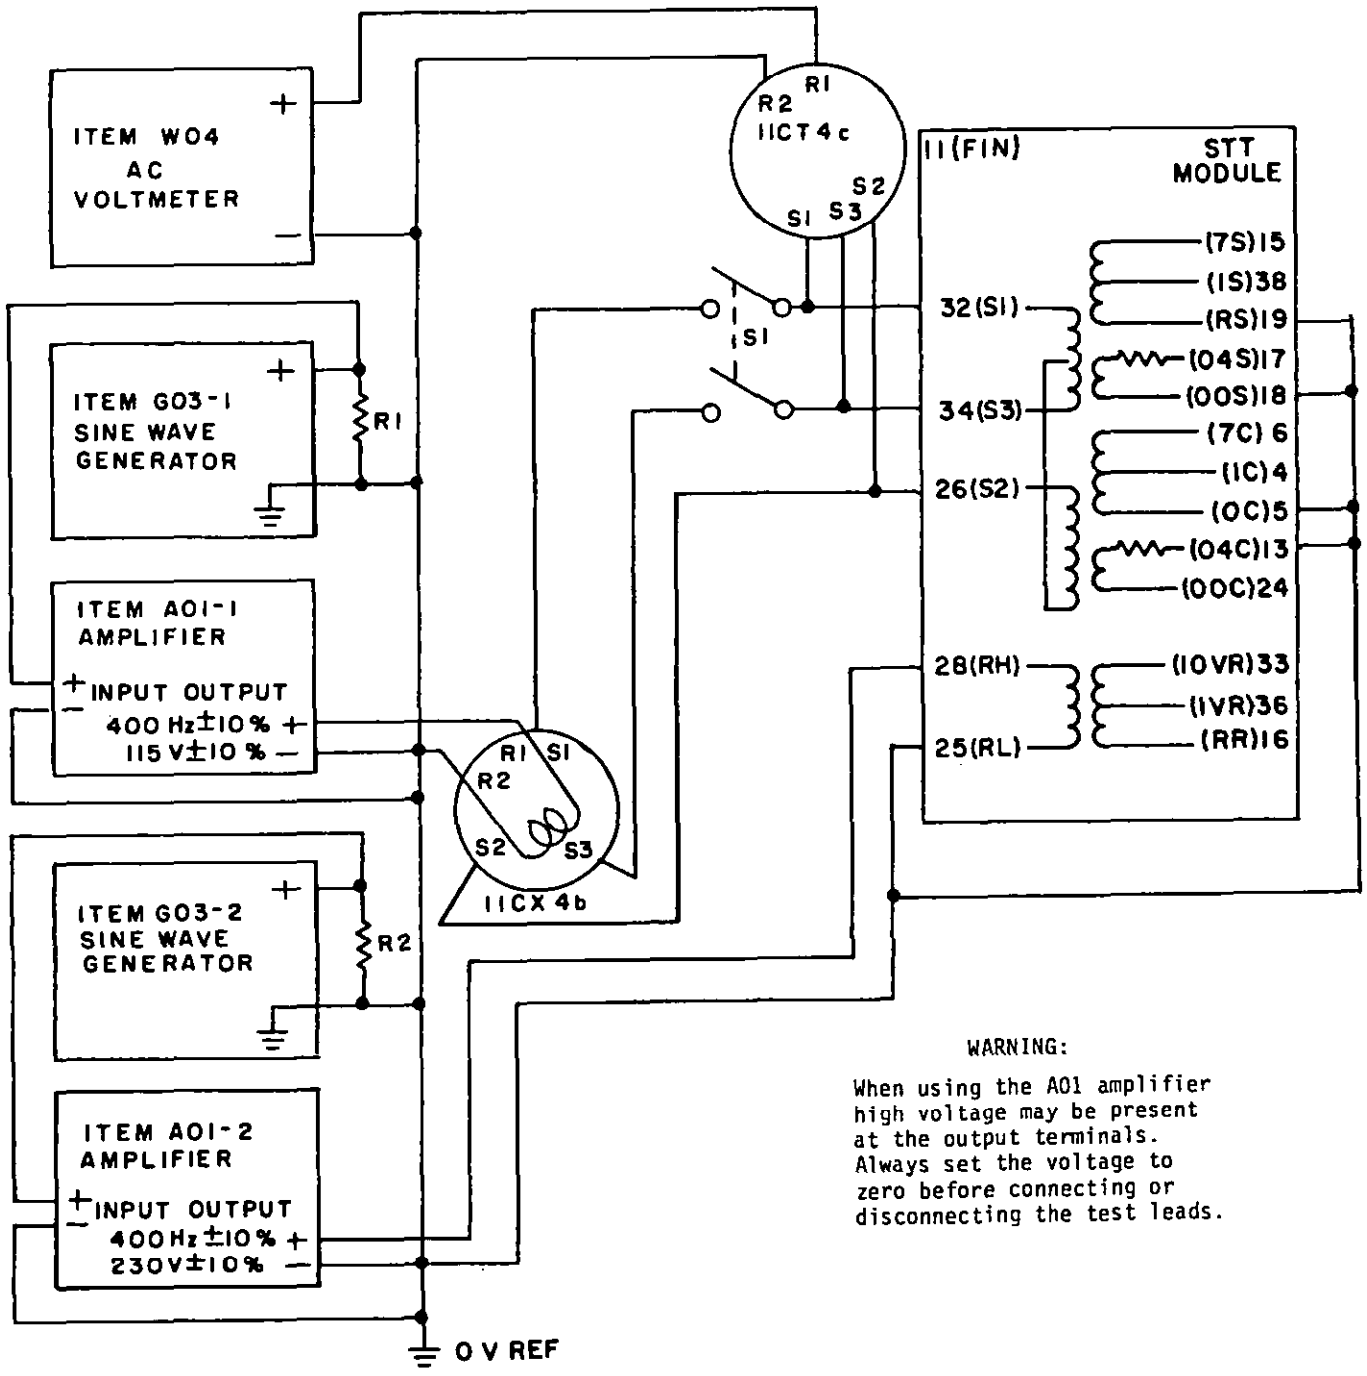

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = R2 = 51Ω ±5%, 1W.
2. S1 = DPST switch.
3. Open S1 and apply power to 11CX4b. Adjust to approximately zero degrees.
4. Close S1 and adjust 11CT4c to obtain a minimum on item W04. Open S1.
5. Apply power to item A01-2 for 10 to 30 seconds and disconnect.
6. Item G03-1 may be used for item G03-2 and item A01-1 may be used for item A01-2.
7. This test shall not exceed 1 minute.

FIGURE 5. Stress test circuit for table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:31Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:31Z
Check the source to verify that this is the current version before use.