|INCH-POUND|

MIL-M-28787/186B
AMENDMENT 2
16 December 1992
SUPERSEDING
AMENDMENT 1
20 September 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GENERATOR, FUNCTION, MSB, ANALOG, KEY CODE SHY

This amendment forms a part of Military Specification MIL-M-28787/186B(EC), dated 30 June 1978, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

At bottom right hand corner of page add "FSC 5963".

PAGE 3

3.5.8, second line: Delete "M28787/186" and substitute "M28787/186-1".

PAGES 7 AND 8

*4.3, first paragraph only: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

*4.3, MIL-STD-1665 designator column: Delete "Item D03" and substitute "Item D07".

*4.3, last paragraph: Delete in its entirety.

AMSC N/A FSC 5963
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

PAGE 9

Add new 6.3 as follows:

"6.3 Cross reference of classification. Part number M28787/186-1 supersedes part number M28787/186. The two parts are interchangeable."

PAGE 20

*FIGURE 9 NOTES: Delete note 8 in its entirety.

PAGE 41

FIGURE 19: Delete and substitute new figure 19 as printed on page 4 of this amendment.

PAGE 43

*FIGURE 20: Delete and substitute new figure 20 as printed on page 5 of this amendment.

PAGE 46

FIGURE 22: Delete and substitute new figure 22 as printed on page 6 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:32Z
Check the source to verify that this is the current version before use.


Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0168)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

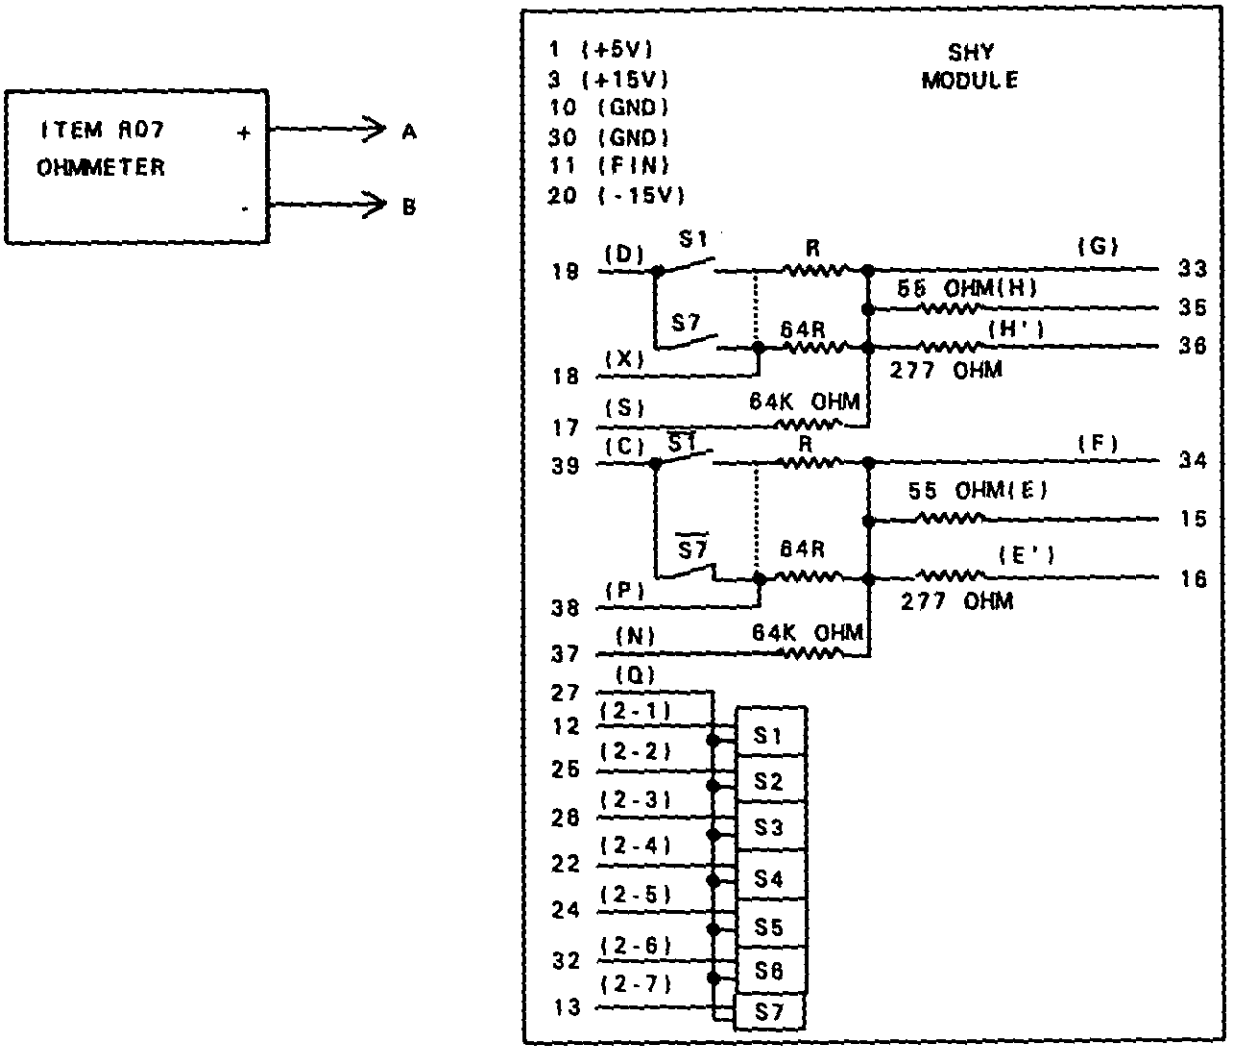

NOTE: For test condition N3, penetrate the anodized finish on the module fin with a sharply pointed probe connected to the negative terminal.

FIGURE 19. Continuity test circuit for table XIV.

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

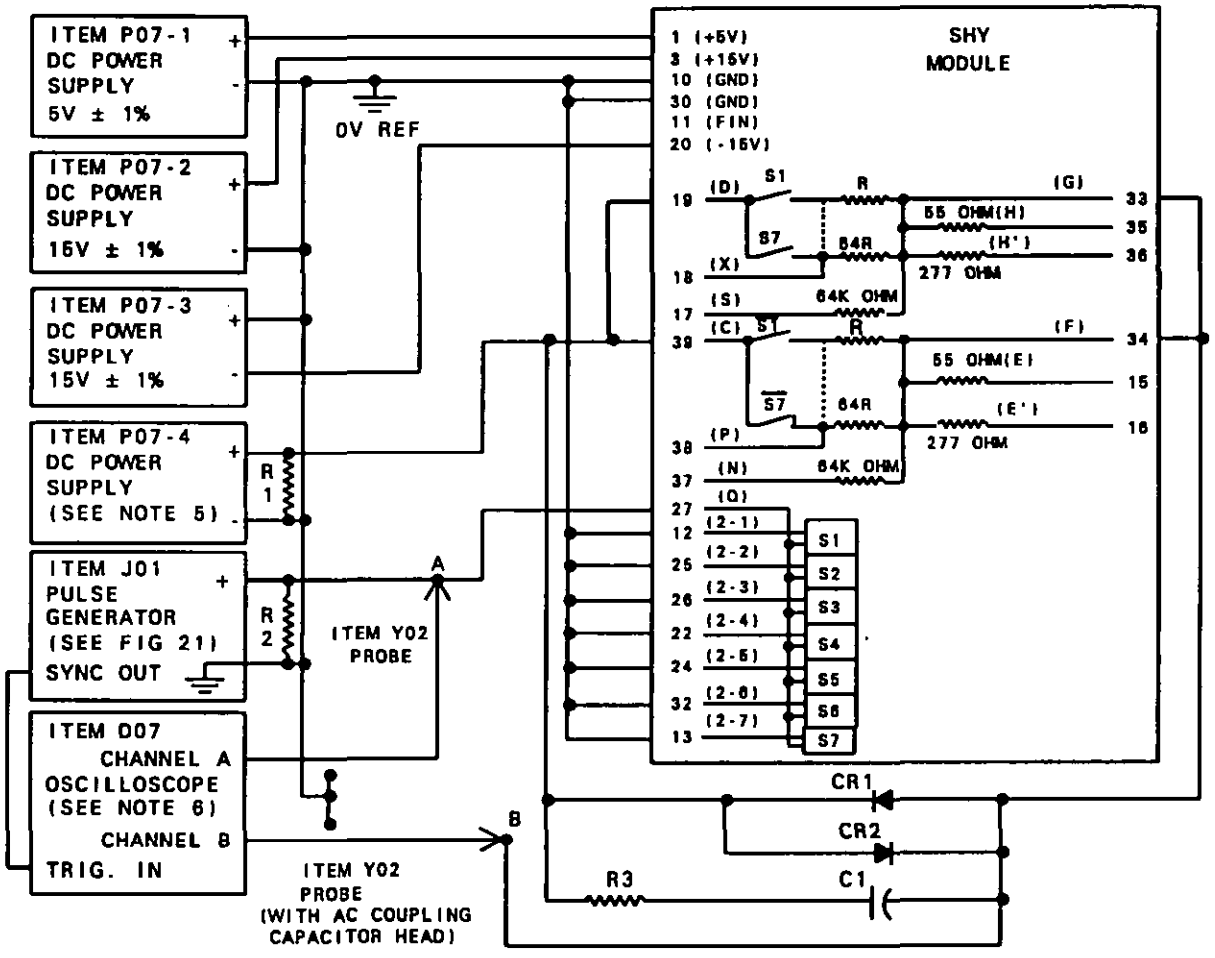


NOTES:

1. R1 = R2 = 50 Ohm ± 5 percent, 1 W.
2. R3 = 750 Ohm ± 1 percent, 1/8 W.
3. C1 = 220 pF ± 5 percent, 20 WVdc.
4. CR1 = CR2 = 1N4148, or equivalent.
5. For test conditions P1 and P2, adjust power supply P07-4 for 6.0 V ± 1 percent and for test conditions P3 and P4, adjust power supply P07-4 for 1.1 V ± 1 percent.
6. Oscilloscope D07 shall be ac coupled so that channel B can be amplified for maximum amplitude or a dc voltage can be subtracted by means of a differential comparator. Verify that channel B output amplitude stays within ± 1 mV of its settled out value at 6.0 uS after the input pulse.

FIGURE 20. Settling time test circuit for table XV.

Source: https://assist.dla.mil -- Downloaded: 20260410-20T16:32Z
Check the source to verify that this is the current version before use.

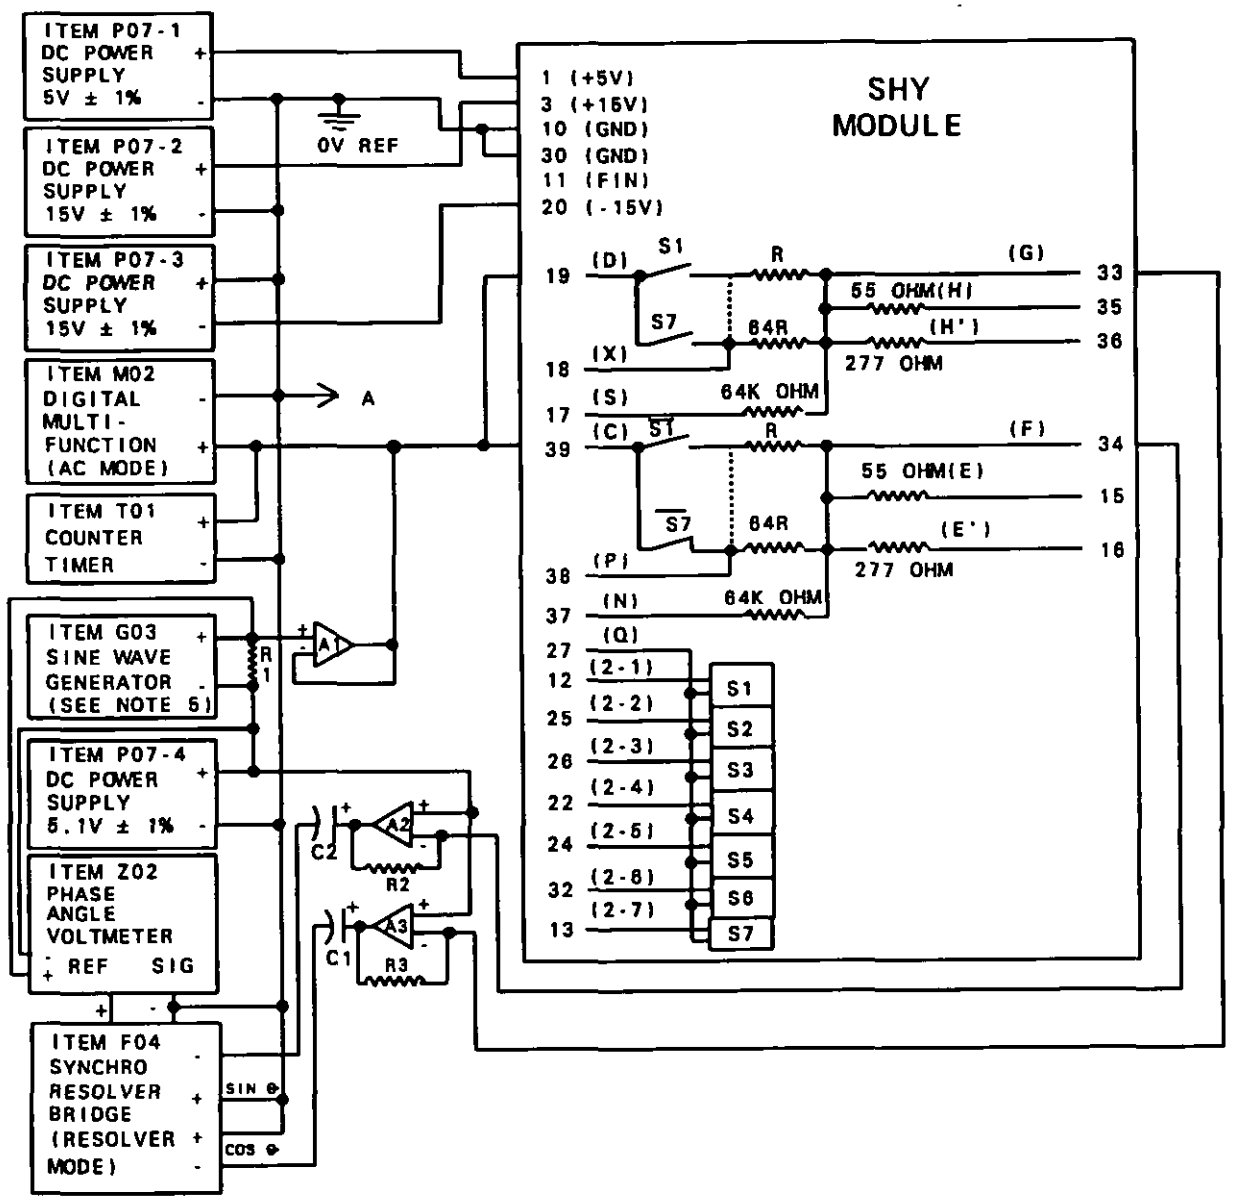

NOTES:
1. R1 = 600 Ohm ± 5 percent, 1 W.
2. R2 = R3 = 500 Ohm ± 0.01 percent (matched to ± 0.002 percent), 1/8 W.
3. C1 = C2 = 100 uF ± 5 percent, 20 WVdc, electrolytic.
4. A1-A3 = uA741, or equivalent.
5. Item G03 setup (verified at pins 19 and 39):
   Amplitude = 3.2 ± 0.1 Vrms.
   Frequency = 800 ± 8 Hz.

FIGURE 22. 800 Hz angular accuracy test circuit for table XVI.

Source: https://assist.dla.mil -- Downloaded: 20260410-20T16:32Z
Check the source to verify that this is the current version before use.