MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

GENERATOR, FUNCTION, LSB, ANALOG, KEY CODE SHU

This amendment forms a part of MIL-M-28787/187B(EC), dated 20 October 1983, and is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

TABLE I, Test conditions N1-N4, Max columns: Delete "4" (four places) and substitute "6" (four places).

PAGE 7

6.4, Settling time: Delete "4" and substitute "6".

PAGE 39

TABLE XIV, Test conditions N1-N4, Max columns: Delete "4" (four places) and substitute "6" (four places).

PAGE 40


FIGURE 19: Delete and substitute new figure 19 as printed on page 2 of this amendment.

PAGE 41

FIGURE 20, Note 2, Delete "4.0" and substitute "6".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

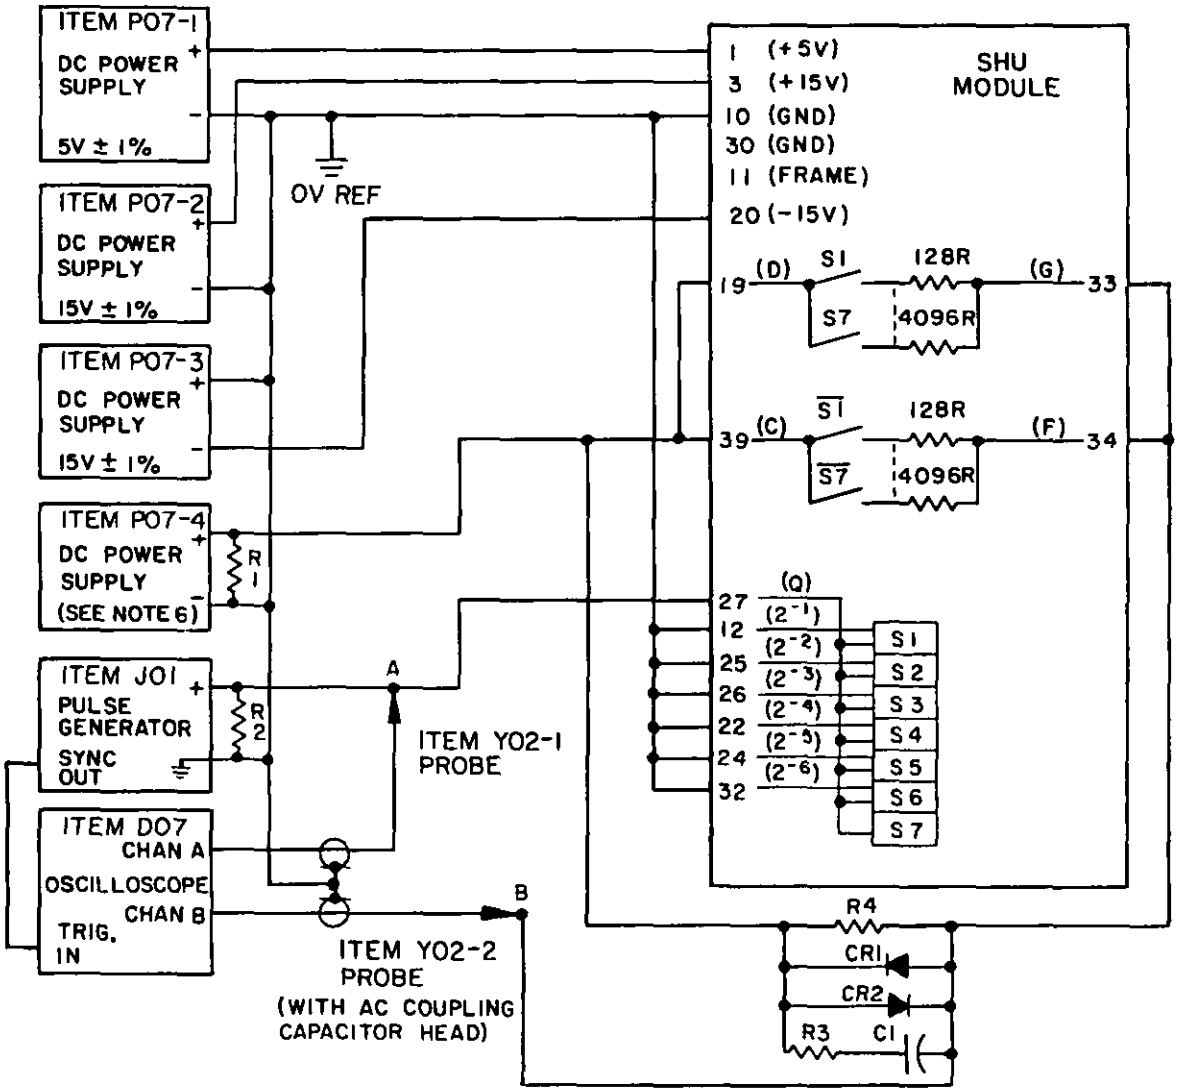

NOTES:
1. R1 = R2 = 50Ω ±5%, 1 W.
2. R3 = 750Ω ±1%, 1/8 W.
3. R4 = 777Ω ±0.1%, 1/8 W.
4. C1 = 220 pF ±5%, 20 WV dc.
5. CR1 = CR2 = 1N4148, or equivalent.
6. For test conditions N1 and N2, adjust item P07-4 for 6 V ±1% and for test conditions N3 and N4, adjust item P07-4 for 1.1 V ±1%.
7. Item D07 shall be ac coupled so that channel B can be amplified for maximum amplitude or a dc voltage can be subtracted by means of a differential comparator. Verify that channel B output amplitude stays within ± 1 mV of its settled out value.

FIGURE 19. Settling time test circuit for table XIV.

Source: https://assist.dla.mil Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N697)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.