INCH-POUND

MIL-M-28787/190A
AMENDMENT 1
31 March 1993

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

BUFFER-LIMITER, ANALOG, KEY CODE BAC

This amendment forms a part of Military Specification MIL-M-28787/190A(EC), dated 12 November 1980, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 18

FIGURE 9: Delete and substitute new figure 9 as printed on page 2 of this amendment.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0170)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:34Z
Check the source to verify that this is the current version before use.

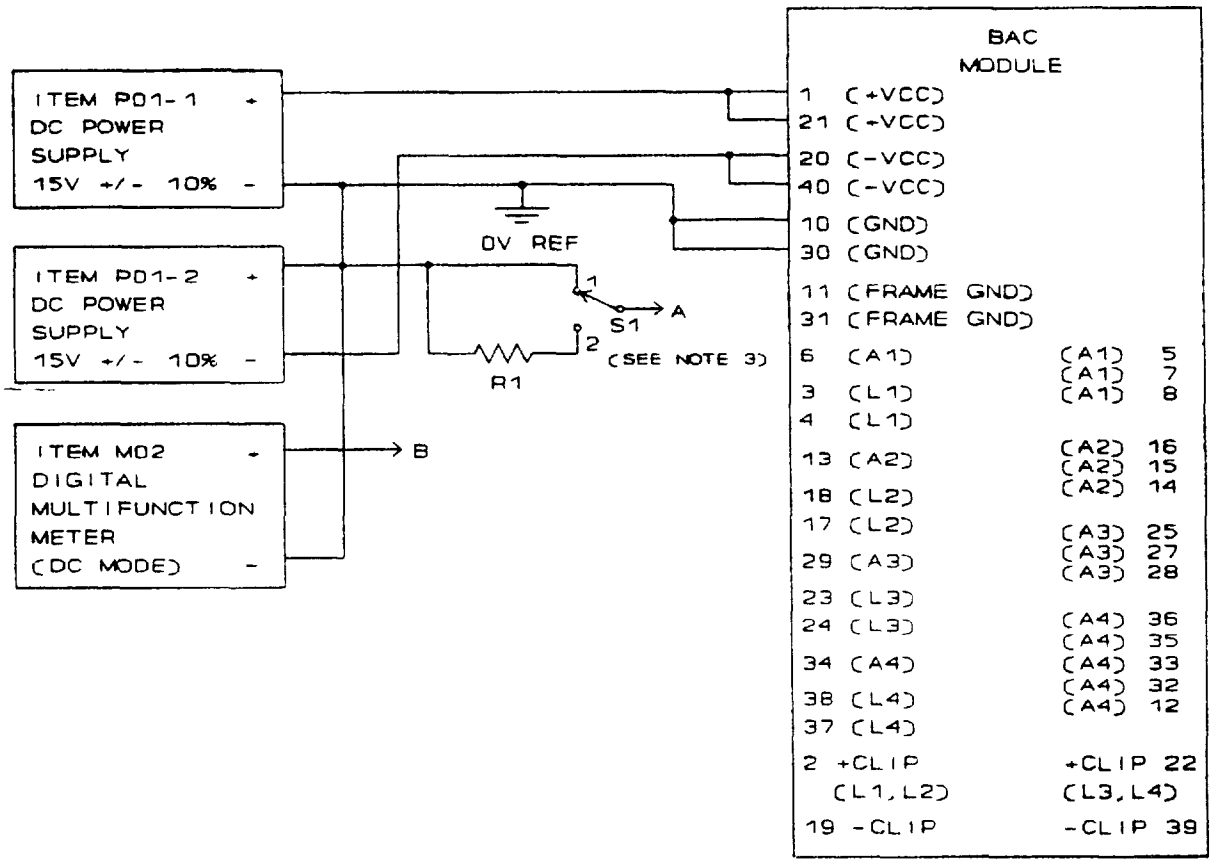

NOTES:

1. R1 = 1 MΩ ± 1%, 1/8 W.

2. S1 = SPDT switch.

3. Set switch S1 to position 1 for test conditions E1-E4 and F1-F4 and to position 2 for test conditions G1-G4.

4. V_{OUT} = -5.0 mV minimum, 5.0 mV maximum for test conditions E1-E4.

5. The G1-G4 limits confirm a maximum voltage change of 4.0 mV.

6. $\text{Drift} = \frac{[VOS\ (t = 0°C) - VOS\ (t = 60°C)]}{60°C}$

7. $I_b = \frac{[VOUT\ (S1 = \text{Position } 1) - VOUT\ (S1 = \text{Position } 2)]}{1\ M\Omega}$

FIGURE 9. Offset voltage test, offset voltage drift with temperature check, and bias current (Ib) check test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:34Z
Check the source to verify that this is the current version before use.