MIL-M-28787/192B(EC)
18 February 1981
SUPERSEDING
MIL-M-28787/192A(EC)
29 April 1980

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

REGULATOR, NEGATIVE, POWER, KEY CODE ARN

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the procurement of an electronic negative regulator module.

1.2 Classification. This specification covers one class of modules.

Class I as specified in MIL-STD-1389.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.
MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX 5043, Department of the Navy, Washington, D.C. 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

* 3.3 Failure rate requirements. All modules procured to this specification shall have a predicted failure rate no greater than 0.600 failures per million operating hours when predicted in accordance with MIL-STD-1389.

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I and shall operate within the environment of the design class I as specified in MIL-STD-1389.

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be ARN.

3.5.2 Size. The module size shall be 1B.

3.5.3 Weight. The module shall have a maximum weight of 70 grams.

3.5.4 Contact pins. The module shall have 20 contact pins positioned A1 through A20. Contact pins positioned A21 through A40 are optional.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A, and an additional heat dissipation fin on increment B.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/192-1, except no marking shall interfere with heat dissipation from the fin (for example, *affixing a label which* may be a heat barrier).


3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance test. All production modules shall be tested in accordance with *footnotes 1 and 2 of table I.*

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C *end-of-life limits of table I (see 6.2).*

* 3.9 Output current limiting. The module shall be designed to have output current limiting when programmed for the -5 V or -15 V output levels. The current limiting shall be same as when programmed for the -5 V output level (see test conditions G1-G4).

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

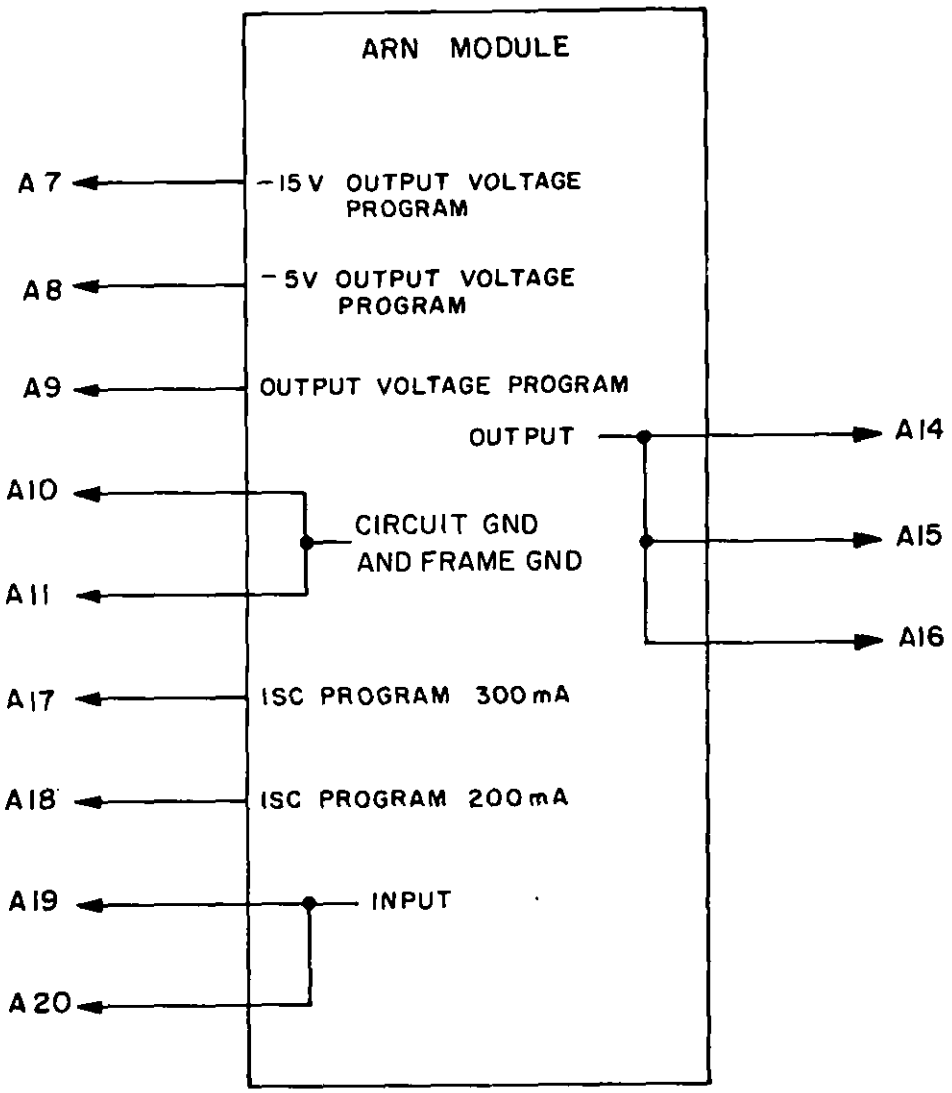

NOTE: Unused pins: A1, A2, A3, A4, A5, A6, A12, and A13.

* FIGURE 1. ARN module function diagram, negative regulator.

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:35Z
Check the source to verify that this is the current version before use.

* TABLE I. *Module electrical requirements.*

Test condition	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25° ±5°C Ambient temperature				Operating temperature 0° to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
A1-A8	Isolation	II	X	10	∞	1.0	∞	10	∞	1.0	∞	MΩ
B1-B4	Continuity	III	X	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	Ω
B5	Continuity	III	S	0.0	1.0	0.0	1.0	0.0	1.0	0.0	1.0	Ω
C1	Output voltage program	IV	X	-5.05	-4.95	-5.10	-4.90	-5.10	-4.90	-5.15	-4.85	Vdc
C2	Output voltage program	IV	X	-15.30	-14.70	-15.45	-14.55	-15.45	-14.55	-15.60	-14.40	Vdc
D1	DC input voltage regulation	V	X	-5.05	-4.95	-5.10	-4.90	-5.10	-4.90	-5.15	-4.85	Vdc
D2-D7	DC input voltage regulation	V	X	← ±23 mV variance max from D1 →								
D8	DC input voltage regulation	V	X	-15.30	-14.70	-15.45	-14.55	-15.45	-14.55	-15.60	-14.40	Vdc
D9-D12	DC input voltage regulation	V	X	← ±45 mV variance max from D8 →								
E1, E2	Input modulation regulation	VI	X	0.1	750.0	0.1	750.0	0.1	750.0	0.1	750.0	μVrms
E3, E4	Input modulation regulation	VI	X	0.01	2.25	0.01	2.25	0.01	2.25	0.01	2.25	mVrms
F1	Output load regulation	VII	X	-5.05	-4.95	-5.10	-4.90	-5.10	-4.90	-5.15	-4.85	Vdc
F2	Output load regulation	VII	X	← ±2.5 mV variance max from F1 →								
F3-F6	Output load regulation	VII	X	← ±10 mV variance max from F1 →								
F7	Output load regulation	VII	X	← ±50 mV variance max from F1 →								
F8	Output load regulation	VII	X	-15.30	-14.70	-15.45	-14.55	-15.45	-14.55	-15.60	-14.40	Vdc
F9	Output load regulation	VII	X	← ±7.5 mV variance max from F8 →								
F10-F13	Output load regulation	VII	X	← ±30 mV variance max from F8 →								
F14	Output load regulation	VII	X	← ±150 mV variance max from F8 →								
G1	Output current limiting	VIII	S	100	125	97	129	88	140	86	143	mAdc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T16:35Z
Check the source to verify that this is the current version before use.

* TABLE I. Module electrical requirements - Continued.

Test condition	Parameter	Ref test table	Test type 1/-3/	Acceptance requirements 25° +5°C Ambient temperature				Operating temperature 0° to 60°C				Unit
				Initial		End-of-life		Initial		End-of-life		
				Min	Max	Min	Max	Min	Max	Min	Max	
G2	Output current limiting	VIII	S	200	245	194	252	176	274	172	279	mAdc
G3	Output current limiting	VIII	S	300	365	291	376	264	409	252	416	mAdc
G4	Output current limiting	VIII	S	400	485	388	500	352	543	344	552	mAdc
H1, H2	Output noise	IX	X	0.0	250.0	0.0	250.0	0.0	250.0	0.0	250.0	μVrms
J1, J2	Output impedance check	X	S	5	500	5	500	5	500	5	500	μVrms
J3	Output impedance check	X	Q	10	1,000	10	1,000	10	1,000	10	1,000	μVrms
K1	Output voltage latch	XI	S	0.650	0.950	0.650	0.950	0.500	0.950	0.500	0.950	Vdc
K2	Output voltage latch	XI	S	-5.05	-4.95	-5.10	-4.90	-5.10	-4.90	-5.15	-4.85	Vdc
L1	Load transient response	XII	S	0	150	0	150	0	150	0	150	mV
L2	Load transient response	XII	S	0	450	0	450	0	450	0	450	mV

1/ "X" parameters shall be 100 percent tested during module acceptance tests.
2/ "S" parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.
3/ "Q" parameters shall be tested during qualification testing only.

Source: https://assist.dla.mil -- Downloaded: 2026/0-20T16:35Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.

4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity (SEMP-QAA) and they conform to the requirements of MIL-M-28787.

* 4.4.2 Order of testing. Test conditions A through L shall be performed in any order with the following exceptions. If test conditions A, G, or K are part of a sequence of tests, the order of testing shall be as follows: A, G, K where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through L in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions C through J, and L shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 3.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 3.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be operated in the test circuit shown on figure 4. Following the vibration tests, the electrical tests of table I which are marked with an "X" in the test type column shall be performed using the initial limits at 25° ±5°C ambient.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 3. Following the life test and while still at the maximum class temperature, electrical tests C through J, and L shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests A through L shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Cross reference of classification. Part number M28787/192-1 supersedes part number M28787/192. The two parts are interchangeable.

* 6.4 Module description. The following electrical parameters reflect the 0° to 60°C end-of-life limits from table I.

Maximum power dissipation	2.25 W
Input voltage	-10 to -40 Vdc
Output voltage	-5 Vdc ±3% or -15 Vdc ±4%
Output impedance	0.100Ω maximum at 1 kHz and at 100 Hz 0.200Ω Maximum at 50 kHz
Input regulation	0.5% V_{out} maximum
Load regulation	0.05% V_{out} maximum at I_{out} < 50 mA 0.2% V_{out} maximum at 50 mA < $I_{out} \leq$ 75% of programmed current limit
Input modulation regulation	0.015% V_{out} maximum

6.5 Module function. This module contains a negative voltage regulator programmable to two voltage levels, -5 and -15 Vdc, with four programmable current limiting levels, 100, 200, 300, and 400 mAdc with a maximum power dissipation of 2.25 W at 25°C (see figure 2). The power dissipation is derated at 24 mW/°C.

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:35Z
Check the source to verify that this is the current version before use.

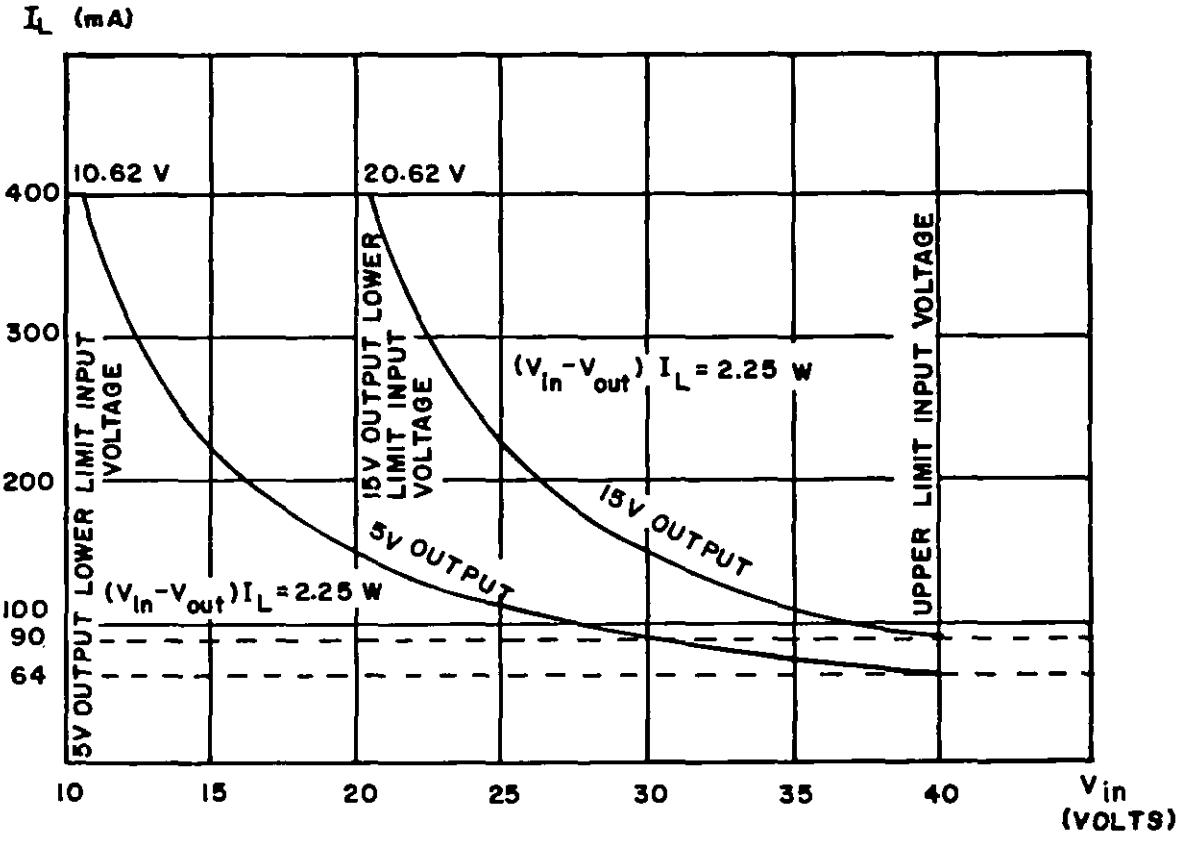


FIGURE 2. Power dissipation limits.

6.6 Pin programming. Module pins may be programmed as follows:

Output voltage programming	-5 Vdc (Jumper pin A9 to A8)
	-15 Vdc (Jumper pin A9 to A7)
Output current limiting programming	100 mA (No connection)
	200 mA (Jumper pin A19 to A18)
	300 mA (Jumper pin A19 to A17)
	400 mA (Jumper A19 to A18 and A17)

* 6.7 Current limiting characteristics. The module has the following characteristics:

a. The module will limit current as programmed (see 6.6). However, in this condition the output voltage will go to zero and the resulting increase in module dissipation (beyond 2.25 W) could cause irreversible damage.

b. The output current should remain less than or equal to 75 percent of the programmed current limit or the module could be adversely affected.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

6.8 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5963-N180)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

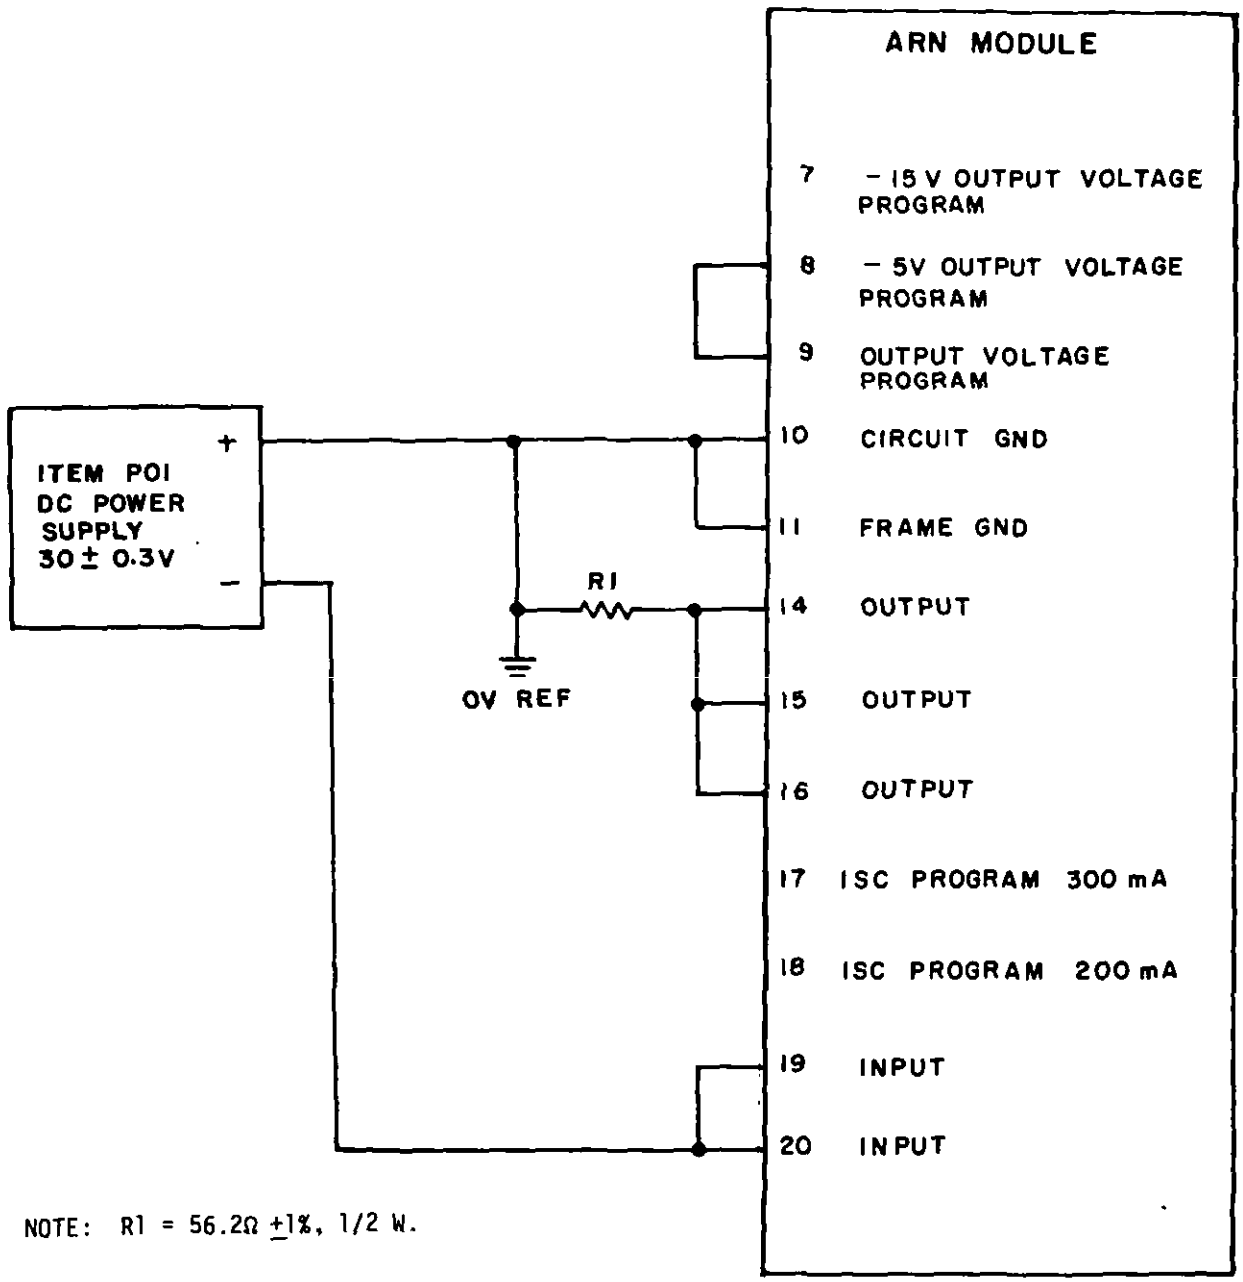


FIGURE 3. Operating temperature, component temperature, and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

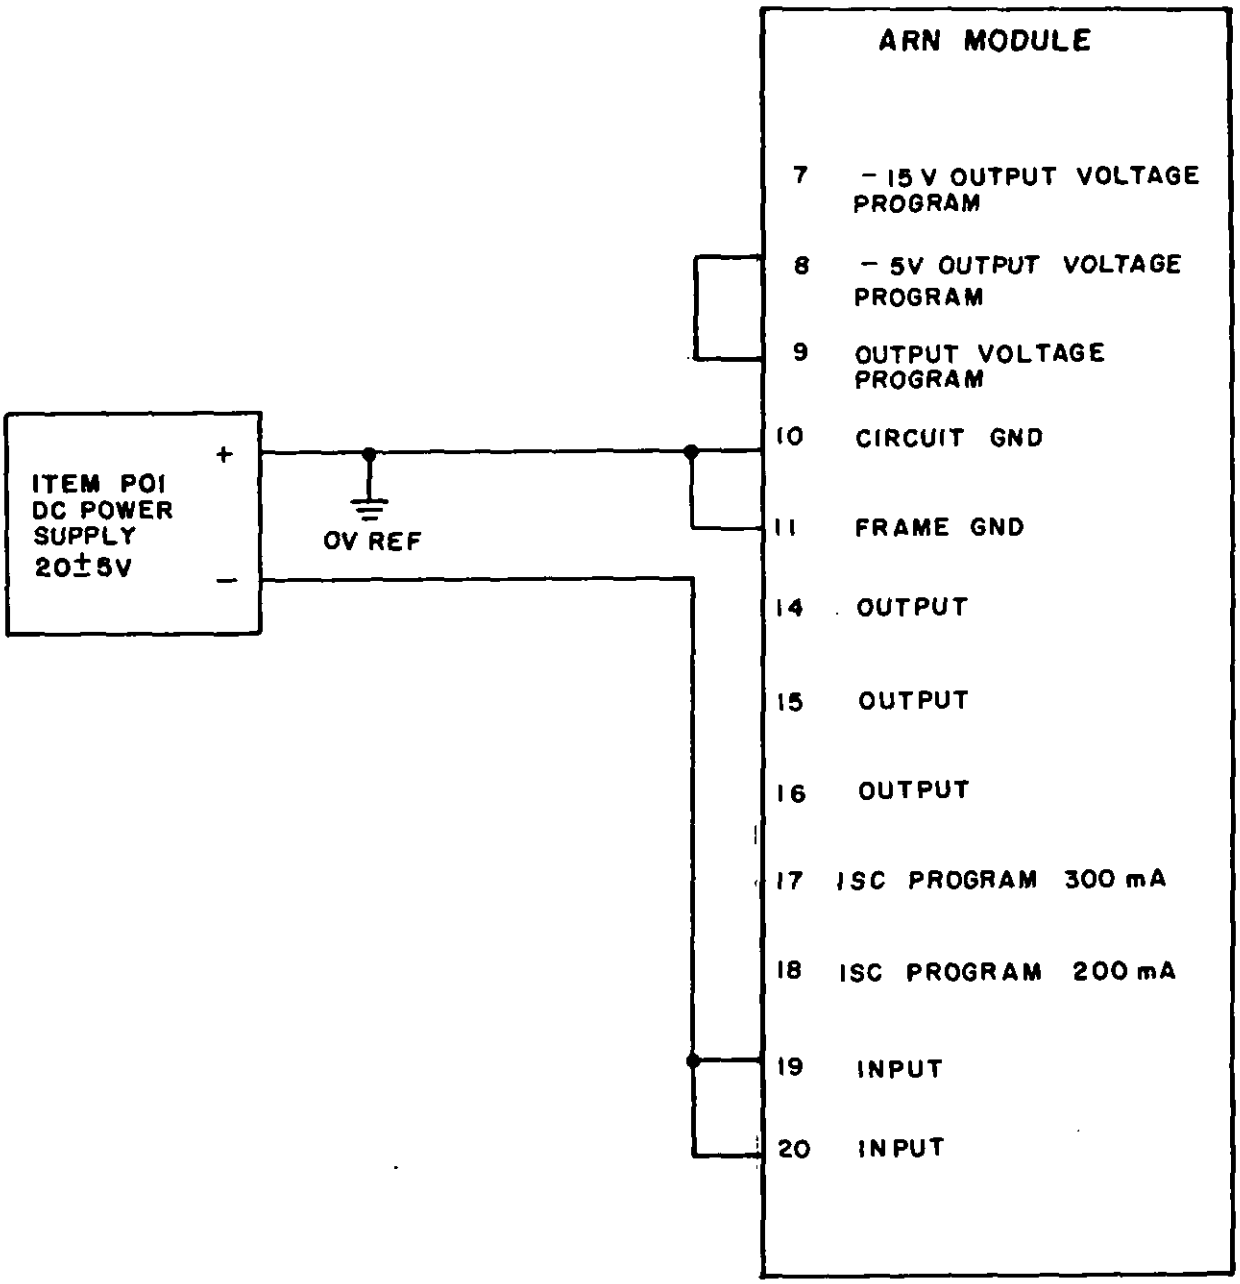



FIGURE 4. Vibration test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

* TABLE II. Isolation test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
A1	Isolation	1	2, 3, 4, 5, 6, 12, 13	10	∞	MΩ	5
A2	↓	2	3, 4, 5, 6, 12, 13	↓	↓	↓	↓
A3		3	4, 5, 6, 12, 13				
A4		4	5, 6, 12, 13				
A5		5	6, 12, 13				
A6		6	12, 13				
A7		12	13				
A8		7, 8, 9, 10, 11, 14, 15, 16, 17, 18, 19, 20	1, 2, 3, 4, 5, 6, 12, 13				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

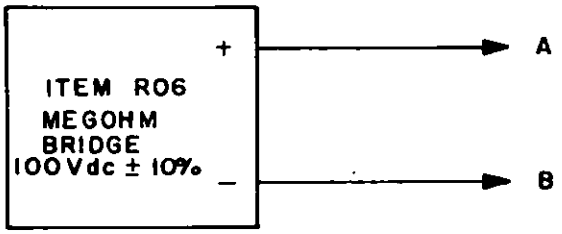

WARNING

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

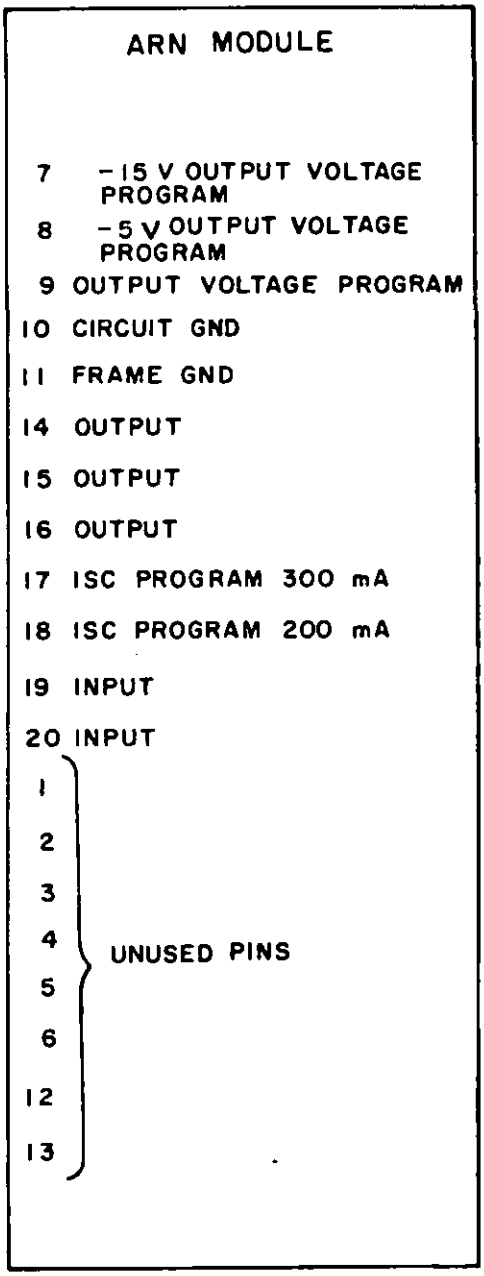



FIGURE 5. Isolation test circuit for table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE III. Continuity test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	B to pin	Min	Max		
B1	Continuity	19	20	0.0	1.0	Ω	6
B2	↓	16	15	↓	↓	↓	↓
B3		16	14				
B4		15	14				
B5		11	Frame				

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

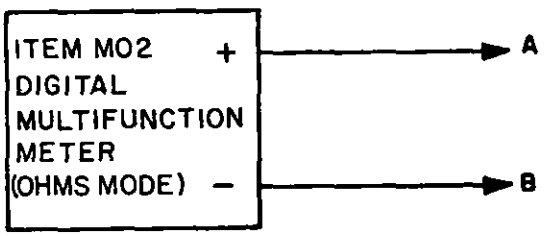

NOTE: For test condition B5 penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.

ARN MODULE	
7	− 15 V OUTPUT VOLTAGE PROGRAM
8	− 5V OUTPUT VOLTAGE PROGRAM
9	OUTPUT VOLTAGE PROGRAM
10	CIRCUIT GND
11	FRAME GND
14	OUTPUT
15	OUTPUT
16	OUTPUT
17	ISC PROGRAM 300 mA
18	ISC PROGRAM 200 mA
19	INPUT
20	INPUT

FIGURE 6. Continuity test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE IV. Output voltage program test.

Test condition	Parameter	P01 (Vdc)	S1 position	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
				A to pin	Min	Max		
C1	Output voltage program	10 ±0.1	1	8	-5.05	-4.95	Vdc	7
C2	Output voltage program	20 ±0.2	2	7	-15.30	-14.70	Vdc	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.


* TABLE V. DC input voltage regulation test.

Test condition	Parameter	P01 (Vdc)	S1 position	Connect A to pin	Initial limits 25° ±5°C Ambient Min	Initial limits 25° ±5°C Ambient Max	Unit	Test figure
D1	DC input voltage regulation	10 ±0.10	1	8	-5.05	-4.95	Vdc	7
D2		15 ±0.15	1		1/			
D3		20 ±0.20	1					
D4		25 ±0.25	2					
D5		30 ±0.30						
D6		35 ±0.35						
D7		40 ±0.40						
D8		20 ±0.20		7	-15.30	-14.70	Vdc	
D9		25 ±0.25			2/			
D10		30 ±0.30						
D11		35 ±0.35	3					
D12		40 ±0.40	3					

1/ V_{out} should not vary more than ±23 mV from value of D1.

2/ V_{out} should not vary more than ±45 mV from value of D8.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T16:35Z
Check the source to verify that this is the current version before use.

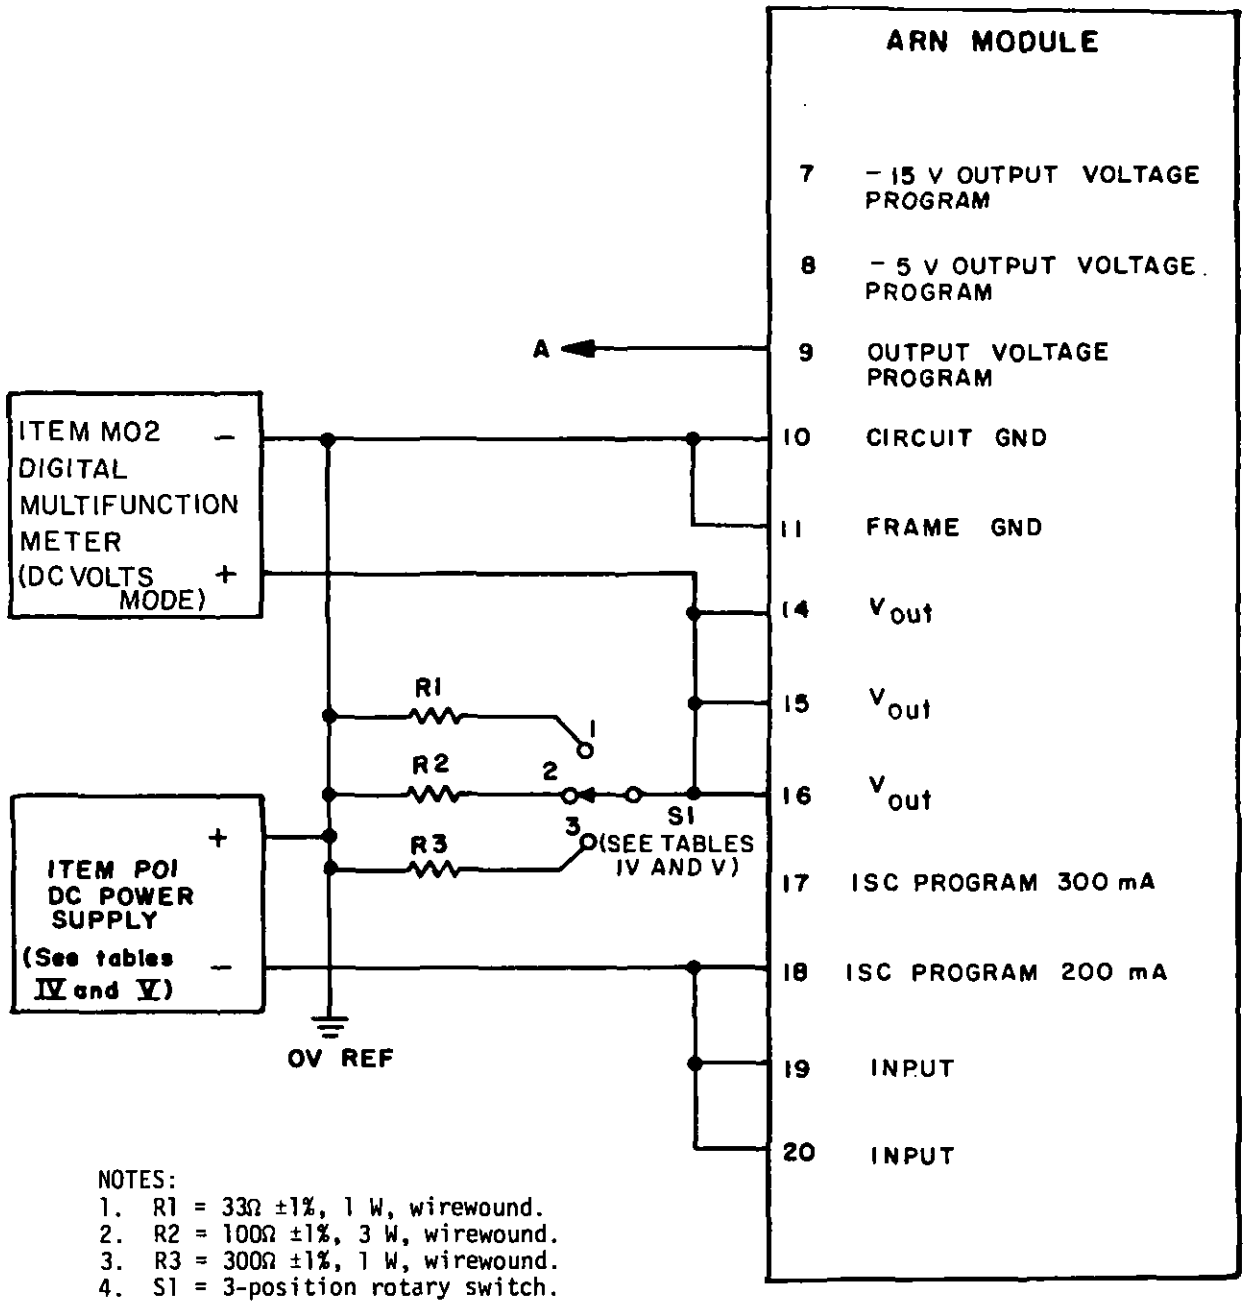

NOTES:
1. R1 = 33Ω ±1%, 1 W, wirewound.
2. R2 = 100Ω ±1%, 3 W, wirewound.
3. R3 = 300Ω ±1%, 1 W, wirewound.
4. S1 = 3-position rotary switch.


* FIGURE 7. Output voltage program and dc input voltage regulation test circuit for tables IV and V.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE VI. Input modulation regulation test.

Test condition	Parameter	G01 (Hz)	P01 (Vdc)	S1 position	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
					A to pin	Min	Max		
E1	Input modulation regulation	120 ±12	Note 6, figure 8	1	8	0.1	750.0	µVrms	8
E2	↓	800 ±80	Note 6, figure 8	1	8	0.1	750.0	µVrms	↓
E3		120 ±12	Note 7, figure 8	2	7	0.01	2.25	mVrms	
E4		800 ±80	Note 7, figure 8	2	7	0.01	2.25	mVrms	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

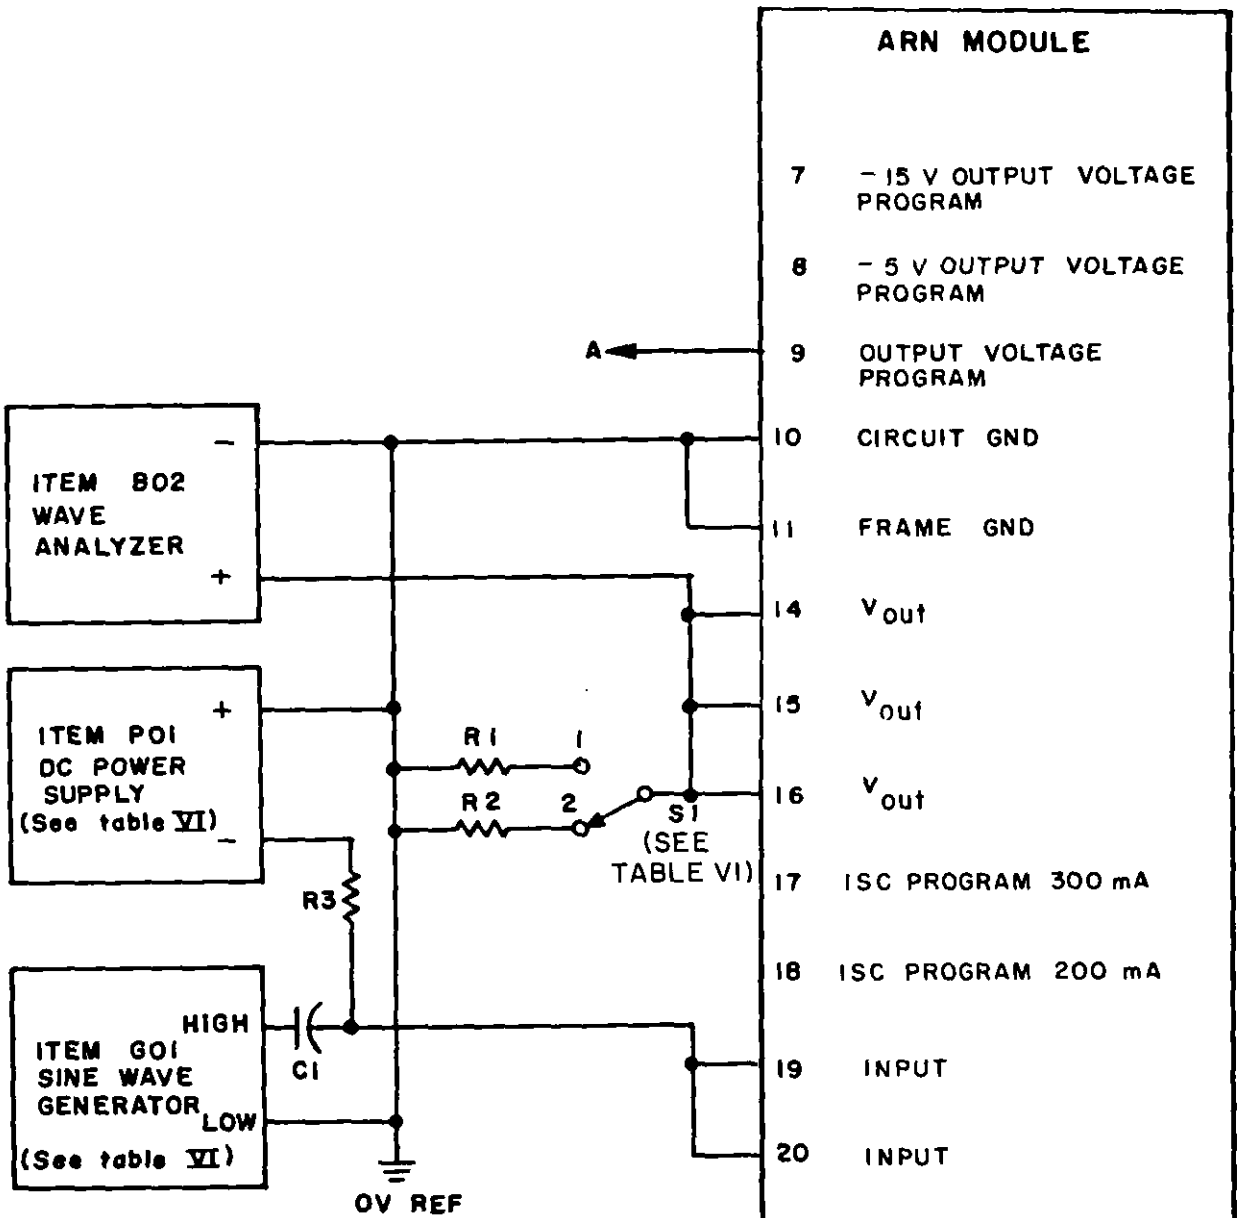

NOTES:
1. R1 = 68Ω ±1%, 5 W, wirewound.
2. R2 = 200Ω ±1%, 2 W, wirewound.
3. R3 = 47Ω ±1%, 1 W, wirewound,
4. C1 = 22 µF ±20%, 35 V, electrolytic.
5. S1 = SPDT switch.
6. Adjust item P01 to give 12 ±0.12 Vdc at pin 20 with pin 20 connected.
   Adjust item G01 to give 1.0 ±0.1 Vrms at pin 20 with pin 20 connected.
7. Adjust item P01 to give 24 ±0.24 Vdc at pin 20 with pin 20 connected.
   Adjust item G01 to give 1.0 ±0.1 Vrms at pin 20 with pin 20 connected.

* FIGURE 8. Input modulation regulation test circuit for table VI.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

* TABLE VII. Output load regulation test.

Test condition	Parameter	PO1 (Vdc)	S1 Position	Connect		Calculation 1/	Initial limits 25° ±5°C Ambient		Unit	Test figure
				A to pin	B to pin		Min	Max		
F1	Output load regulation	10 ±0.1	1	8	Open	Initial V_{out}	-5.05	-4.95	Vdc	9
F2			2		Open	F1-F2	-2.5	2.5	mVdc	
F3			3		Open	F1-F3	-10	10		
F4			4		18	F1-F4	-10	10		
F5			5		18	F1-F5	-10	10		
F6			6		17,18	F1-F6	-10	10		
F7			7		17,18	F1-F7	-50	50		
F8		20 ±0.2	8	7	Open	Initial V_{out}	-15.30	-14.70	Vdc	
F9			9		Open	F8-F9	-7.5	7.5	mVdc	
F10			10		Open	F8-F10	-30	30		
F11			11		18	F8-F11	-30	30		
F12			2		18	F8-F12	-30	30		
F13			4		17,18	F8-F13	-30	30		
F14			12		17,18	F8-F14	-150	150		

1/ For test conditions F2-F7 and F9-F14 the indicated subtraction shall meet the given limits.

Source: https://assist.dla.mil -- Downloaded: 2026-0-20T16:35Z
Check the source to verify that this is the current version before use.

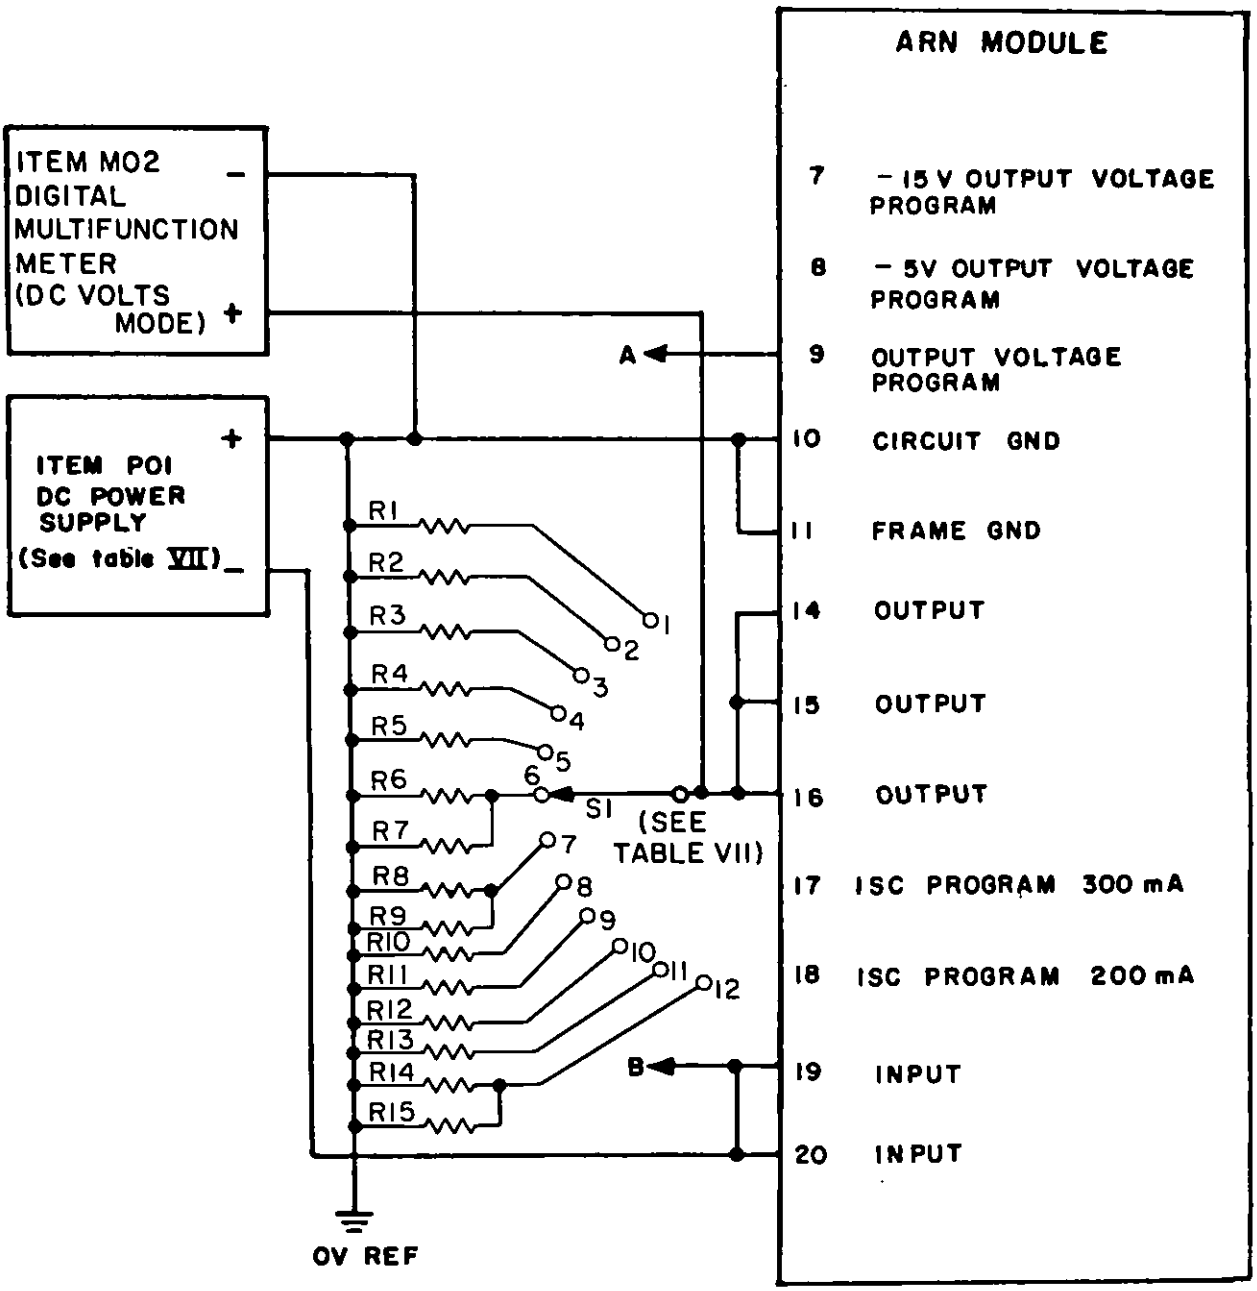

NOTES:
1. R1 = 4.99 kΩ ±1%, 1/10 W.
2. R2 = 100Ω ±1%, 3 W, wirewound.
3. R3 = 66.5Ω ±1%, 1/2 W.
4. R4 = R14 = 50Ω ±1%, 5 W, wirewound.
5. R5 = 33Ω ±1%, 1 W, wirewound.
6. R6 = R8 = 18Ω ±1%, 2 W, wirewound.
7. R7 = 226Ω ±1%, 1/4 W.
8. R9 = 105Ω ±1%, 1/2 W.
9. R10 = 15 kΩ ±1%, 1/10 W.
10. R11 = 300Ω ±1%, 1 W, wirewound.
11. R12 = 200Ω ±1%, 2 W, wirewound.
12. R13 = 150Ω ±1%, 2 W, wirewound.
13. R15 = 665Ω ±1%, 1/2 W.
14. S1 = 12 position rotary switch.
15. When performing test conditions F8-F14 do not keep S1 in position 5, 6, or 7 or module damage may result.


* FIGURE 9. Output load regulation test circuit for table VII.

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:35Z
Check the source to verify that this is the current version before use.

* TABLE VIII. Output current limiting test.

Test condition	Parameter	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
		A to pin	Min	Max		
G1	Output current limiting	Open	100	125	mAdc	10
G2	↓	18	200	245	↓	↓
G3		17	300	365		
G4		17,18	400	485		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

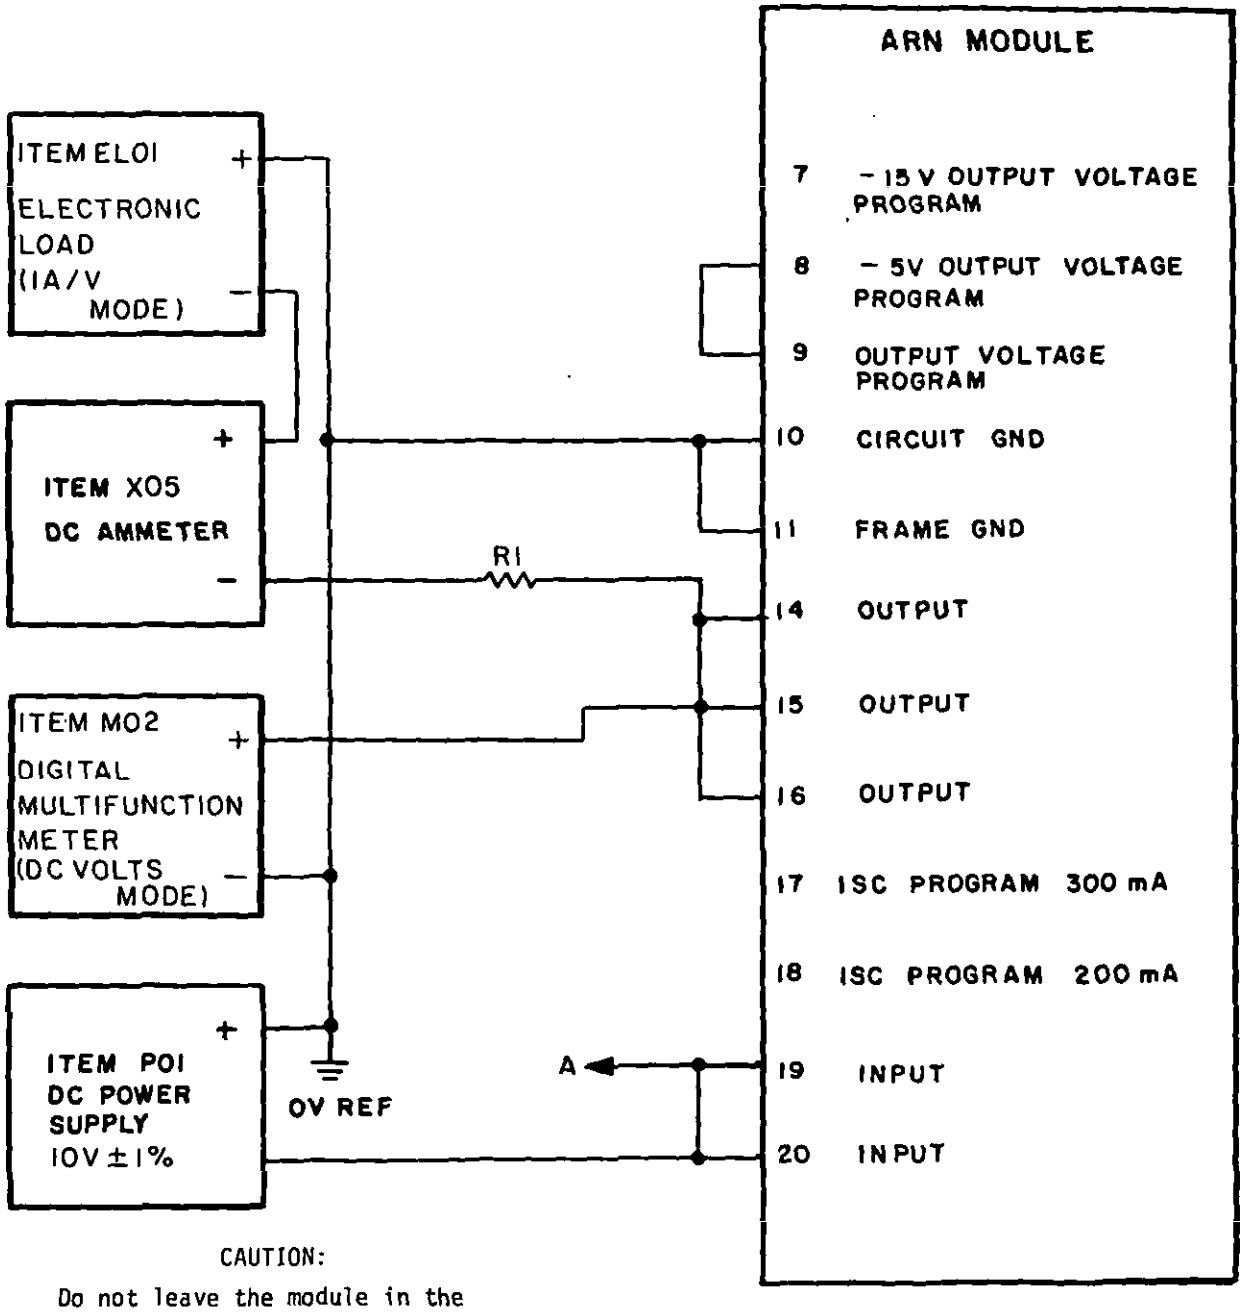

CAUTION:

Do not leave the module in the overcurrent mode (output voltage less than 4.5 V) for more than 5 seconds.

NOTES:
1. R1 = 5Ω ±5%, 2 W, wirewound.
2. For each test condition:

   a. Begin the test with less than 50 mA current on item X05.
   b. Gradually increase the current, using item EL01, until the item M02 voltage is 4.5 V or less.
   c. The current measured by item X05 when b above just occurs shall meet the table VIII limits.


* FIGURE 10. Output short circuit current test circuit for table VIII.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE IX. Output noise test.

Test condition	Parameter	PO1 (Vdc)	S1 position	Connect	Initial limits 25° ±5°C Ambient		Unit	Test figure
				A to pin	Min	Max		
H1	Output noise	10 ±0.10	1	8	0.0	250.0	µVrms	11
H2	Output noise	20 ±0.20	2	7	0.0	250.0	µVrms	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

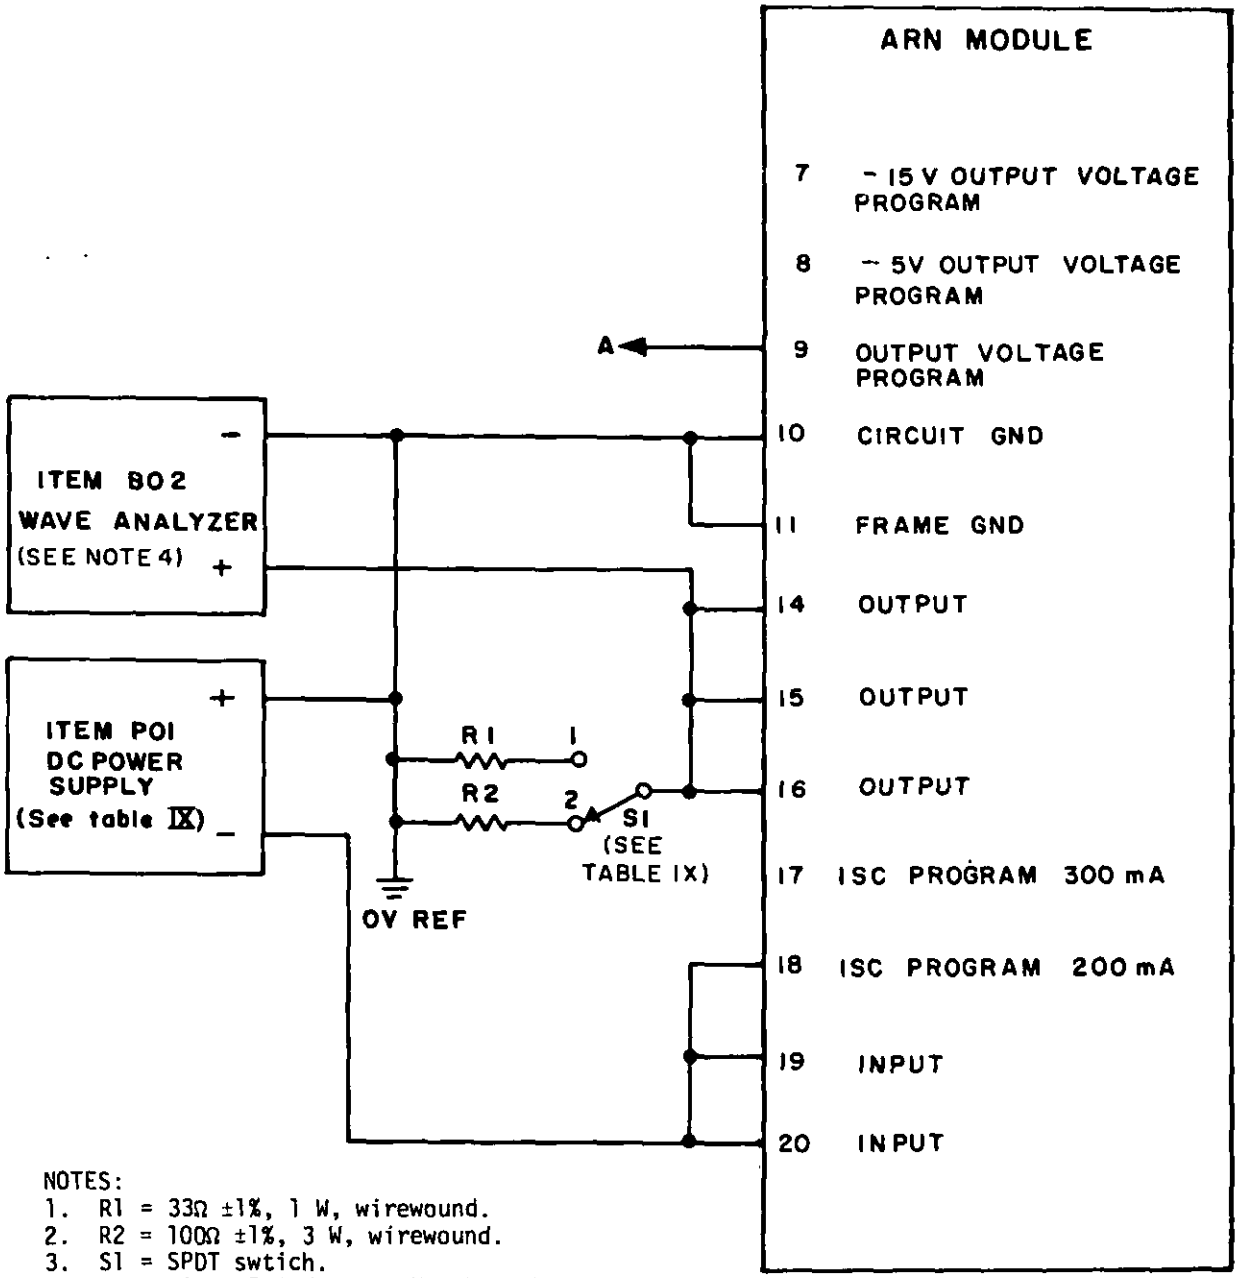

NOTES:
1. R1 = 33Ω ±1%, 1 W, wirewound.
2. R2 = 100Ω ±1%, 3 W, wirewound.
3. S1 = SPDT swtich.
4. Sweep item B02 from 60 Hz through 30 kHz, use 6 Hz bandwidth.

* FIGURE 11. Output noise test circuit for table IX.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE X. Output impedance check test.


Test condition	Parameter 1/ - 3/	G01	Initial limits 25° ±5°C Ambient		Unit	Test figure
			Min	Max		
J1	Output impedance check	100 Hz ±1%	5 (1)	500 (100)	µVrms mΩ	12
J2	Output impedance check	1 kHz ±1%	5 (1)	500 (100)	µVrms mΩ	12
J3	Output impedance check	50 kHz ±1%	10 (2)	1,000 (200)	µVrms mΩ	12

1/ Output impedance = $\frac{V_{out}rms}{V_{in}rms/R1}$

2/ $V_{out}rms$ = pin 14

3/ $V_{in}rms$ = point A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

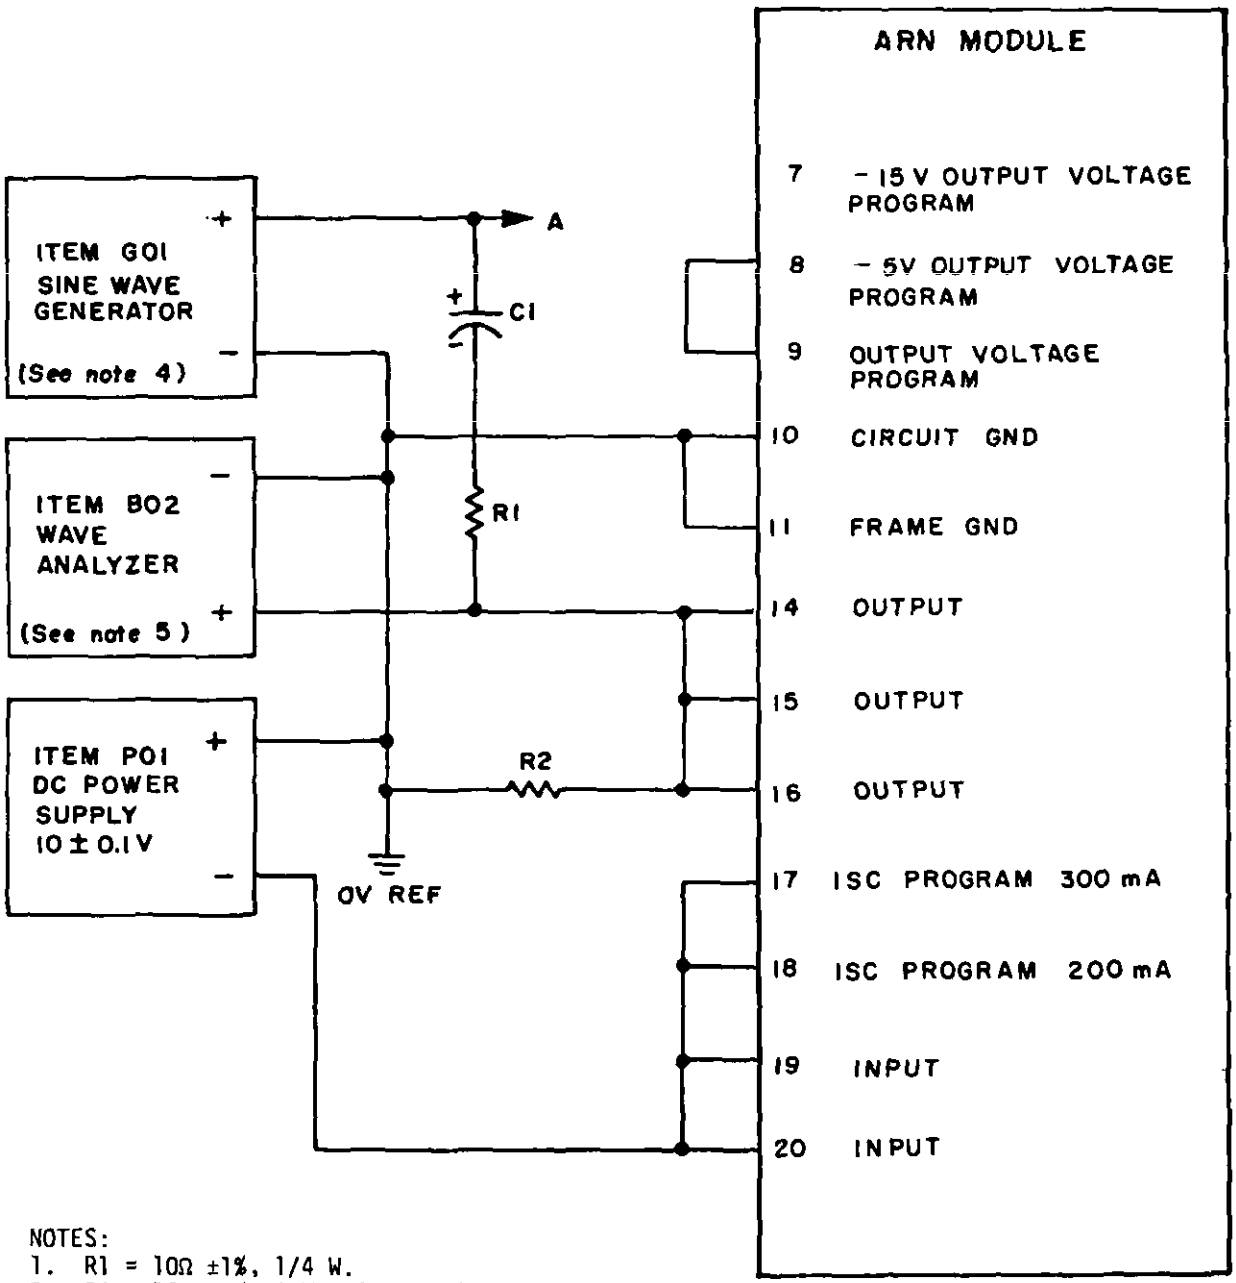

NOTES:
1. R1 = 10Ω ±1%, 1/4 W.
2. R2 = 18Ω ±1%, 2 W, wirewound.
3. C1 = 1,000 µF ±20%, 10 V, electrolytic.
4. Adjust item G01 to 50 ±5 mVrms at point A at the frequency specified in table X.
5. Adjust item B02 frequency to item G01 frequency.


* FIGURE 12. Output impedance check test circuit for table X.

Source: https://assist.dla.mil -- Downloaded: 202610-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE XI. Output voltage latch test.

Test condition	Parameter	P01-1 (Vdc)	S1 position	Initial limits 25° ±5°C Ambient		Unit	Test figure
				Min	Max		
K1	Output voltage latch	10 ±0.10	1	0.650	0.950	Vdc	13
K2	Output voltage latch	10 ±0.10	2	-5.05	-4.95	Vdc	13

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

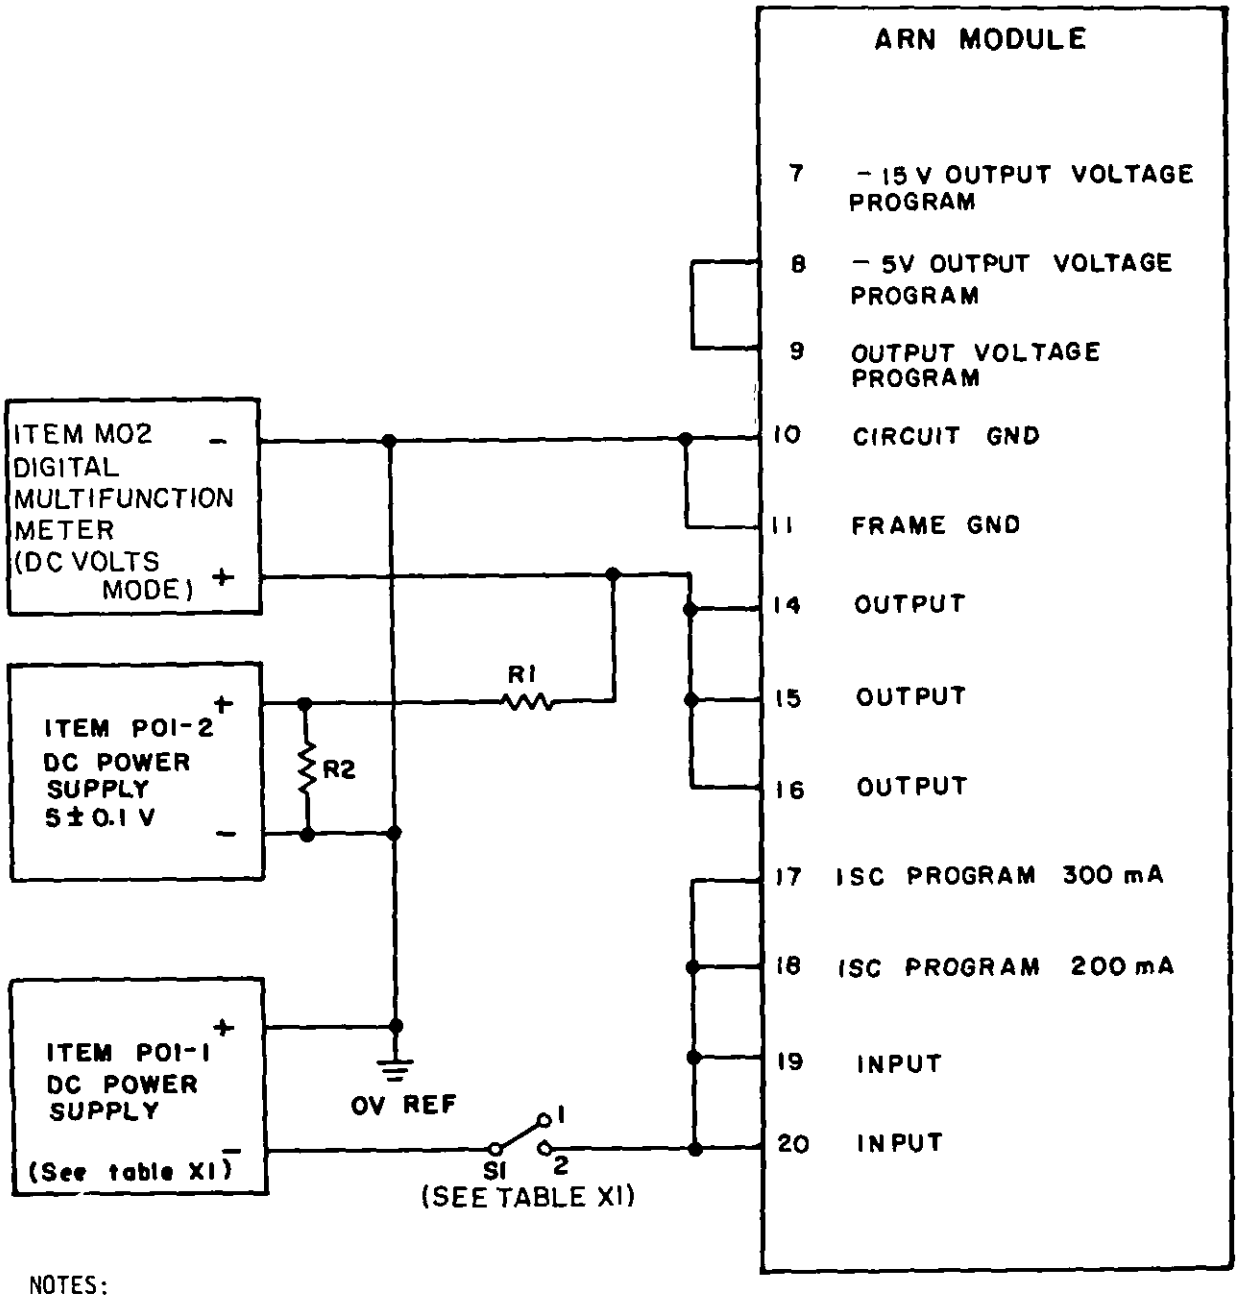

NOTES:
1. R1 = 50Ω ±1%, 2 W, wirewound.
2. R2 = 50Ω ±1%, 5 W, wirewound.
3. S1 = SPST switch.


* FIGURE 13. Output voltage latch test circuit for table XI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

TABLE XII. Load transient response test.

Test condition	Parameter	Connect		Initial limits 25° ±5°C Ambient		Unit	Test figure
		Pin 9 to pin	Pin 17 to pin	Min	Max		
L1	Load transient response	8	Open	0	150	mV	14,15
L2	Load transient response	7	19	0	450	mV	14,15


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

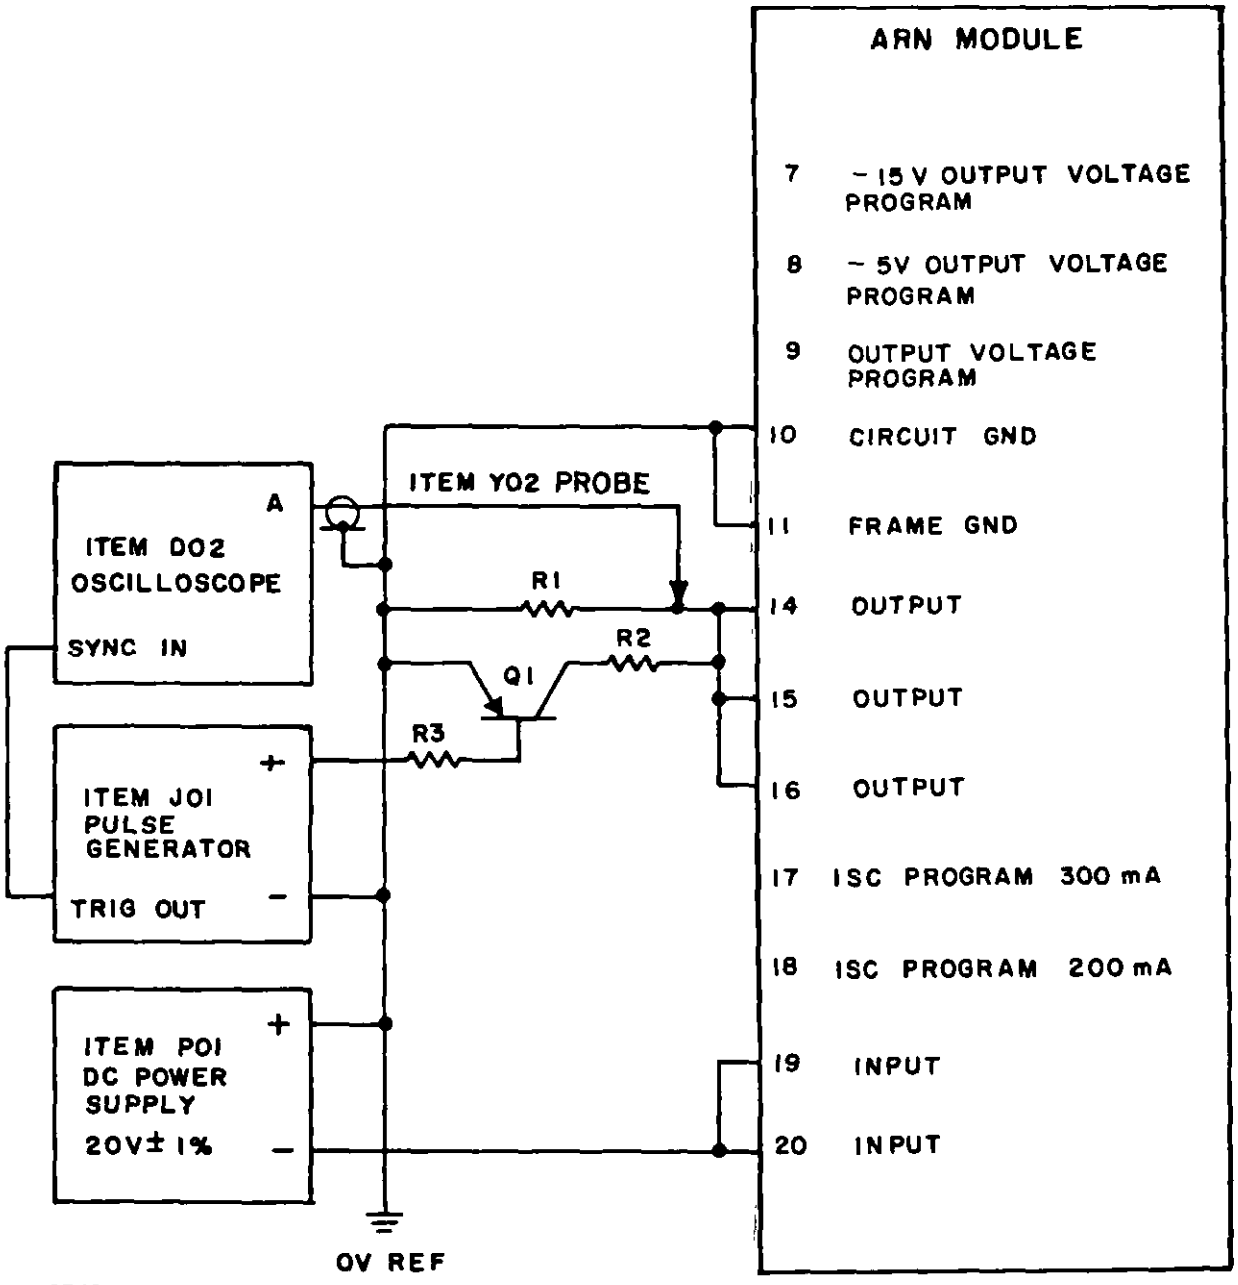

NOTES:
1. R1 = 200Ω ±1%, 2 W, noninductive wirewound.
2. R2 = 100Ω ±1%, 3 W, noninductive wirewound.
3. R3 = 169Ω ±1%, 1/8 W.
4. T1 = 2N4029, or equivalent.

* FIGURE 14. Load transient response test circuit for table XII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

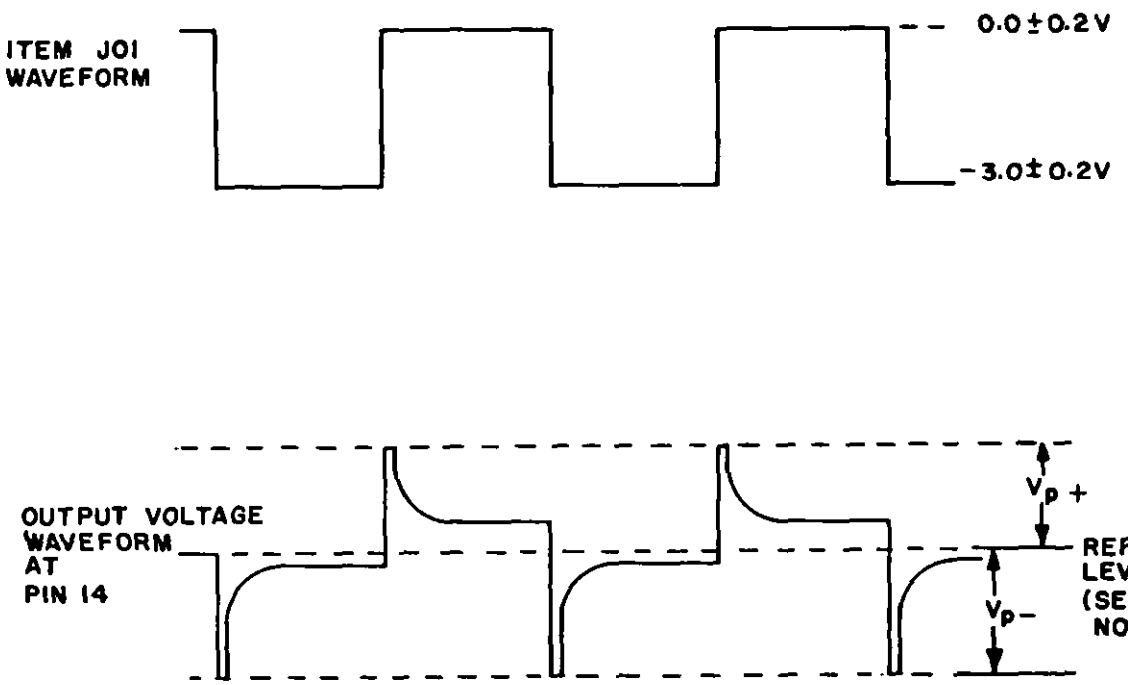

NOTES:
1. Item J01 setup:
   PW = 50 µs ±10%
   PRP = 100 µs ±10%
   $t_{THL} = t_{TLH} = 10 \pm 5$ ns
2. The reference level is the -5 V or -15 V level obtained before the item J01 pulse is applied to the circuit.
3. The data recorded for test conditions L1 and L2 is the largest of the two readings V_{p+} and V_{p-}.

FIGURE 15. Load transient response test circuit waveforms for table XII.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/1263

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
ATTN: ELEX 5043
Washington, DC 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-M-28787/192B(EC), Modules, Standard Electronic Regulator, Negative, Power, Key Code ARN

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:35Z
Check the source to verify that this is the current version before use.