INCH-POUND

MIL-M-28787/197A(SH)
AMENDMENT 3
24 August 1990
SUPERSEDING
AMENDMENT 2
18 February 1986

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

INVERTER, DIGITAL, KEY CODE EBD

This amendment forms a part of Military Specification MIL-M-28787/197A(SH), dated 30 April 1984, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

PAGE 4

* TABLE I, Test conditions D1-D18, Test type column Delete "X" and substitute "S".

PAGE 5

* TABLE I, Test conditions V1-V18, Max limit: Delete "15" (four places) and substitute "20" (four places).

PAGE 6

4.4.2. Delete and substitute the following.

"4 4.2 Order of testing. Test conditions A through V shall be performed in any order with the following exceptions. Test conditions A, B, C, and D are stress tests and shall be performed only at 25 ± 5°C. If test conditions A, B, C, or D are part of a sequence of tests, the order of testing shall be as follows A, B, C, and D where applicable, followed by the remaining tests in the sequence "

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:37Z
Check the source to verify that this is the current version before use.

4.5.1, fifth line: Delete "D" and substitute "E".

4.5.3, third line: Delete "D" and substitute "E".

4.5.3, sixth line: Delete "D" and substitute "E".

PAGE 7

6.5 Add "18" between the words "contains" and "independent".

6.5.2 Delete in its entirety

PAGE 9

* FIGURE 2: Delete and substitute new figure 2 as printed on page 3 of this amendment

PAGE 54

* TABLE XIX, Max limit: Delete "15" and substitute "20"


NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Preparing activity:
Navy - SH

(Project 5963-N776)

Agent. NW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:37Z
Check the source to verify that this is the current version before use.

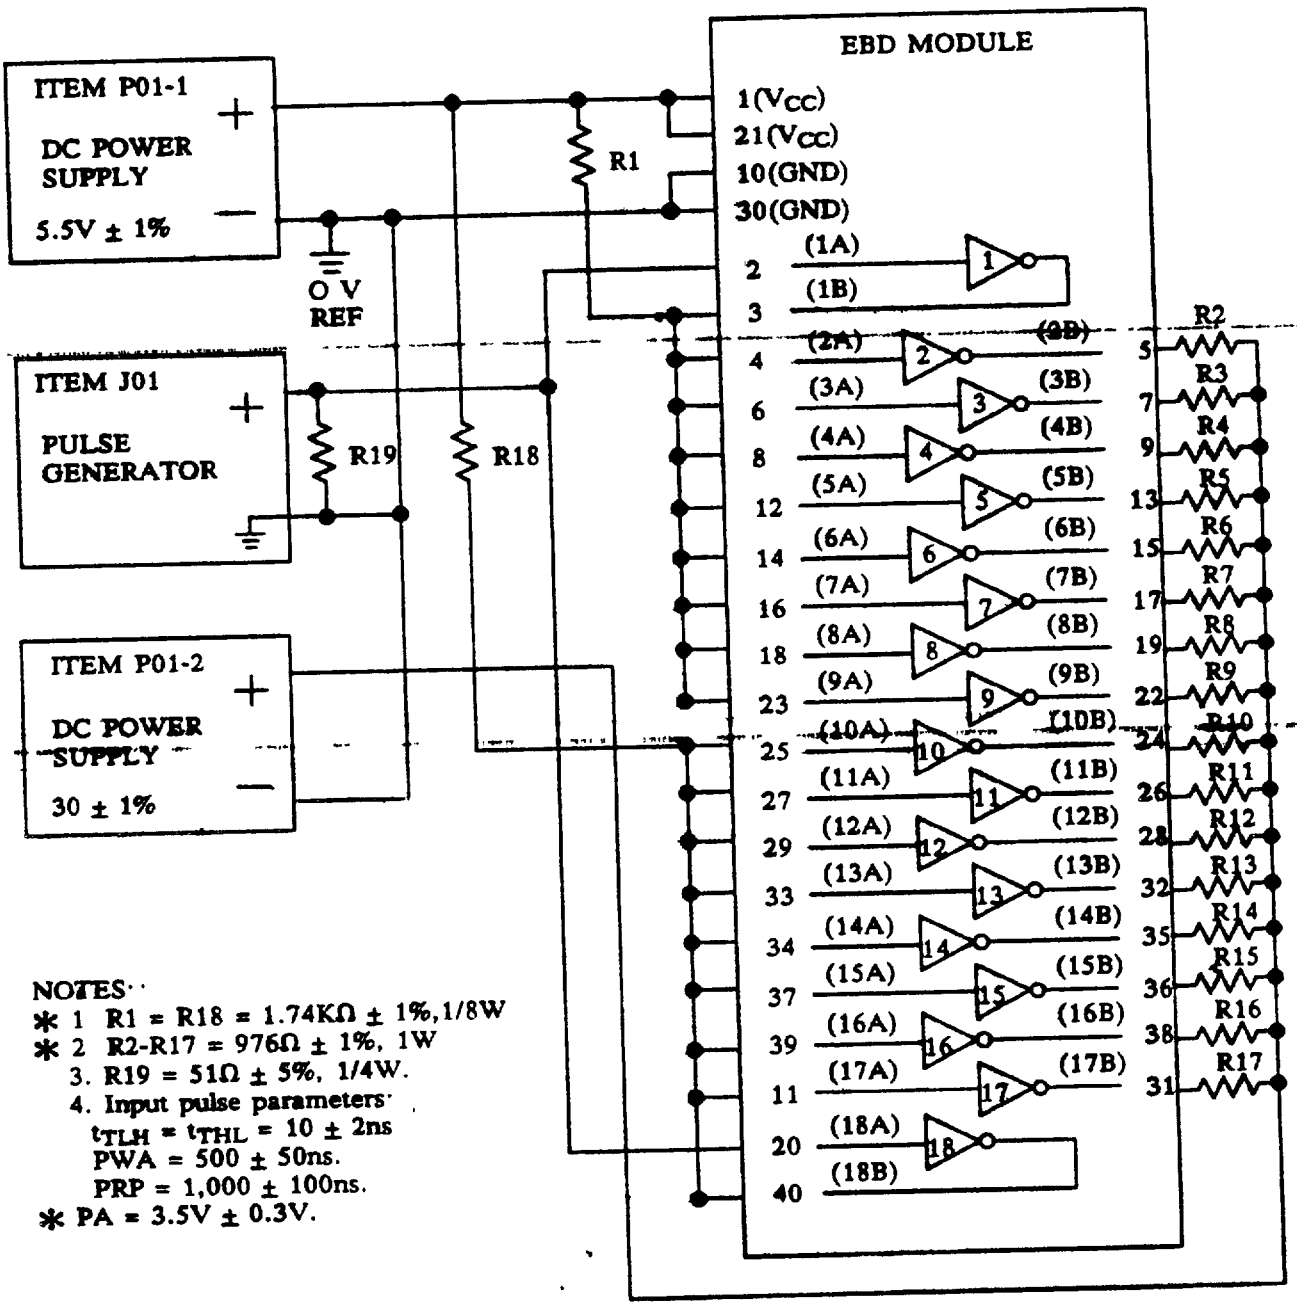

NOTES:
* 1 R1 = R18 = 1.74KΩ ± 1%,1/8W
* 2 R2-R17 = 976Ω ± 1%, 1W
3. R19 = 51Ω ± 5%, 1/4W.
4. Input pulse parameters:
$t_{TLH} = t_{THL}$ = 10 ± 2ns
PWA = 500 ± 50ns.
PRP = 1,000 ± 100ns.
* PA = 3.5V ± 0.3V.

FIGURE 2. Operating temperature and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:37Z
Check the source to verify that this is the current version before use.