
MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE, MAGNETICALLY SHIELDED (IRON CORE-IRON SLEEVE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the coils described herein shall consist of this specification and the latest issue of MIL-C-39010.

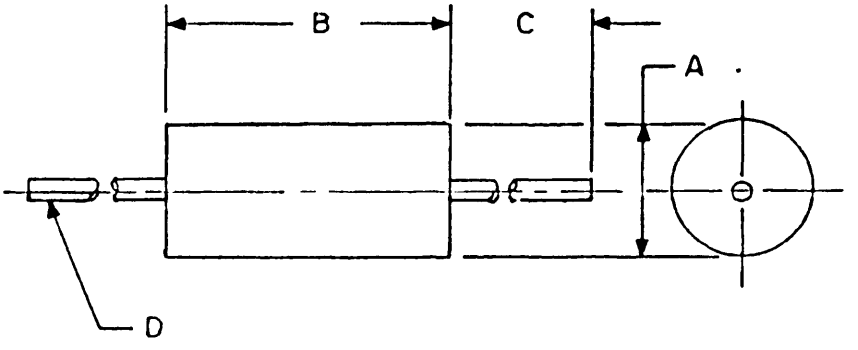

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.085 (2.16)	.105 (2.67)
B	.240 (6.10)	.260 (6.60)
C	1.250(31.75)	1.626(41.30)
D	.0185 (.47)	.0215 (.55)

NOTE: Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Iron core - iron sleeve.

Weight: 0.30 gram maximum.

Operating temperature range: -55°C to +125°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202, test voltage 300 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202 (70,000 feet), test voltage 200 volts rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Inductance tolerance: See table I.

Q values: See table I.

Self-resonant frequency: See table I.

Percent coupling: 5 percent maximum.

DC resistance: See table I.

Temperature rise: 35°C.

Terminal pull: 5 pounds.

Part number: M39010/11 (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
BR10**	.10	5, 10	52	25.0	500	.06	1500
BR11**	.11	5	52	25.0	480	.07	1400
BR12**	.12	5, 10	52	25.0	480	.07	1400
BR13**	.13	5	52	25.0	450	.08	1300
BR15**	.15	5, 10	52	25.0	450	.08	1300
BR16**	.16	5	55	25.0	430	.09	1200
BR18**	.18	5, 10	55	25.0	430	.09	1200
BR20**	.20	5	55	25.0	390	.11	1100
BR22**	.22	5, 10	55	25.0	390	.11	1100
BR24**	.24	5	55	25.0	340	.12	1000
BR27**	.27	5, 10	55	25.0	340	.12	1000
BR30**	.30	5	52	25.0	310	.14	950
BR33**	.33	5, 10	52	25.0	310	.14	950
BR36**	.36	5	52	25.0	280	.16	900
BR39**	.39	5, 10	52	25.0	280	.16	900
BR43**	.43	5	50	25.0	250	.20	800
BR47**	.47	5, 10	50	25.0	250	.20	800
BR51**	.51	5	50	25.0	220	.25	750
BR56**	.56	5, 10	50	25.0	220	.25	750
BR62**	.62	5	48	25.0	200	.27	700
BR68**	.68	5, 10	48	25.0	200	.27	700
BR75**	.75	5	48	25.0	180	.36	600
BR82**	.82	5, 10	48	25.0	180	.36	600
BR91**	.91	5	45	25.0	165	.40	525
B1R0**	1.00	5, 10	45	25.0	165	.40	525

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
B1R1**	1.1	5	45	7.9	150	.70	425
B1R2**	1.2	5, 10	45	7.9	150	.70	425
B1R3**	1.3	5	45	7.9	130	.80	400
B1R5**	1.5	5, 10	45	7.9	130	.80	400
B1R6**	1.6	5	45	7.9	120	.90	350
B1R8**	1.8	5, 10	45	7.9	120	.90	350
B2R0**	2.0	5	45	7.9	110	1.3	320
B2R2**	2.2	5, 10	45	7.9	110	1.3	320
B2R4**	2.4	5	45	7.9	100	1.8	275
B2R7**	2.7	5, 10	45	7.9	100	1.8	275
B3R0**	3.0	5	42	7.9	70	1.8	275
B3R3**	3.3	5, 10	42	7.9	70	1.7	290
B3R6**	3.6	5	42	7.9	65	1.8	275
B3R9**	3.9	5, 10	45	7.9	65	1.8	275
B4R3**	4.3	5	45	7.9	58	2.6	225
B4R7**	4.7	5, 10	45	7.9	58	2.6	225
B5R1**	5.1	5	45	7.9	54	2.9	210
B5R6**	5.6	5, 10	45	7.9	54	2.9	210
B6R2**	6.2	5	45	7.9	50	3.3	200
B6R8**	6.8	5, 10	45	7.9	50	3.3	200
B7R5**	7.5	5	45	7.9	48	4.5	170
B8R2**	8.2	5, 10	45	7.9	48	4.5	170
B9R1**	9.1	5	45	7.9	45	4.8	165
B100**	10.0	5, 10	45	7.9	45	4.8	165

1/ The complete dash number will include an additional letters (indicated by **). The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number.

2/ The rated dc current is based on 90°C ambient temperature with a 35°C rise.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:33Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from initial measurement		Allowable % from specified minimum value in electrical characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification inspection				
Group II	±5	---	---	-10
Group IV	±5	±(3%+.001 ohm)	1/	-10
Group V	±5	±(2%+.001 ohm)	1/	-10
Quality conformance inspection				
Group C				
Subgroup 1	±5	±(2%+.001 ohm)	1/	-10
Subgroup 3	±5	---	---	-10
Subgroup 4	±5	±(3%+.001 ohm)	1/	-10

1/ The self-resonant frequency shall be not less than the value specified in table I.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Air Force - 11, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0657-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:33Z
Check the source to verify that this is the current version before use.