
MILITARY SPECIFICATION SHEET

COILS, FIXED, RADIOFREQUENCY, MOLDED, MICRO-MINIATURE (PHENOLIC CORE), ESTABLISHED RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the coils described herein shall consist of this specification and the latest issue of MIL-C-39010.

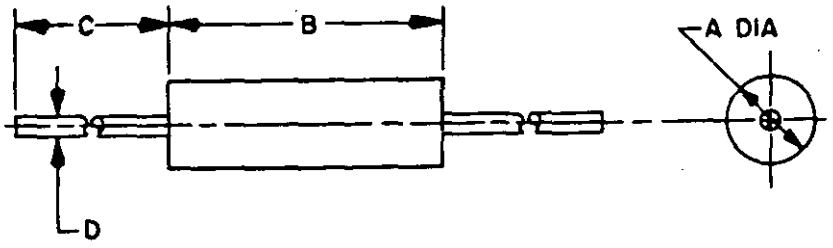

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.085 (2.16)	.105 (2.67)
B	.240 (6.10)	.260 (6.60)
C	1.250 (31.75)	1.626 (41.30)
D	.0185 (.47)	.0215 (.55)

NOTE: Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Material: Phenolic core.

Weight: 0.30 gram maximum.

Operating temperature range: -55°C to +125°C.

Dielectric withstanding voltage: Method 301 of MIL-STD-202 test voltage: 1,000 volts rms.

Barometric pressure: Method 105, test condition C, MIL-STD-202 (70,000 feet), test voltage 300 volts rms.

Electrical characteristics: See tables I and II.

Inductance: See table I.

Inductance tolerance: See table I.

Q values: See table I.

Self-resonant frequency: See table I.

DC resistance: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

Temperature rise: 35°C.

Terminal pull: 5 pounds.

Part number: M39010/08 (dash number from table I).

Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE I. Electrical characteristics (initial) and dash numbers.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
BR10**	.10	5,10	40	25.0	680	.08	1350
BR11**	.11	5	40	25.0	640	.09	1270
BR12**	.12	5,10	40	25.0	640	.09	1270
BR13**	.13	5	38	25.0	600	.10	1200
BR15**	.15	5,10	38	25.0	600	.10	1200
BR16**	.16	5	35	25.0	550	.12	1105
BR18**	.18	5,10	35	25.0	550	.12	1105
BR20**	.20	5	33	25.0	510	.14	1025
BR22**	.22	5,10	33	25.0	510	.14	1025
BR24**	.24	5	33	25.0	430	.16	960
BR27**	.27	5,10	33	25.0	430	.16	960
BR30**	.30	5	30	25.0	410	.22	815
BR33**	.33	5,10	30	25.0	410	.22	815
BR36**	.36	5	30	25.0	365	.30	700
BR39**	.39	5,10	30	25.0	365	.30	700
BR43**	.43	5	30	25.0	330	.35	650
BR47**	.47	5,10	30	25.0	330	.35	650
BR51**	.51	5	30	25.0	300	.50	545
BR56**	.56	5,10	30	25.0	300	.50	545
BR62**	.62	5	28	25.0	275	.60	495
BR68**	.68	5,10	28	25.0	275	.60	495
BR75**	.75	5	28	25.0	250	.85	415

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (initial) and dash numbers - Continued.

Dash number 1/	Inductance µH	Inductance tolerance ± percent	Q min	Test frequency (MHz)	Self-resonant frequency min (MHz)	DC resistance (25°C) max (ohms)	Rated dc current (mA) 2/
BR82**	.82	5,10	28	25.0	250	.85	415
BR91**	.91	5	25	25.0	230	1.00	385
B1R0**	1.00	5,10	25	25.0	230	1.00	385

1/ The complete dash number will include two additional letters (indicated by **). The first additional letter will indicate the inductance tolerance and the second additional letter will indicate the failure rate symbol (e.g., M, P, R, S) and will be added to the end of the dash number
2/ The rated dc current is based on 90°C ambient temperature with a 35°C rise.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from initial measurement		Allowable % from specified minimum value in electrical characteristics (initial) table	
	Inductance	DC resistance	Self-resonant frequency	Q
	Percent			
Qualification inspection				
Group II	±2	---	---	-10
Group IV	±5	±(3%+.001 ohm)	1/	-10
Group V	±5	±(2%+.001 ohm)	1/	-15
Quality conformance inspection				
Group C				
Subgroup 1	±5	±(2%+.001 ohm)	1/	-15
Subgroup 3	±2	---	---	-10
Subgroup 4	±5	±(3%+.001 ohm)	1/	-10

1/ The self-resonant frequency shall be not less than the value specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, CG, MC, SH
Air Force - 19

Agent:
DLA-ES

Preparing activity:
Army - ER

(Project 5950-0603-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:32Z
Check the source to verify that this is the current version before use.