
MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY,
(SERIES N (CABLED), PIN CONTACT, CLASS 2)

This amendment forms a part of MIL-C-39012/1F, dated 14 December 1987, and is approved for use by all Departments and Agencies of the Department of Defense.


PAGE 2

FIGURE 2, delete and substitute new figure 2 as follows:

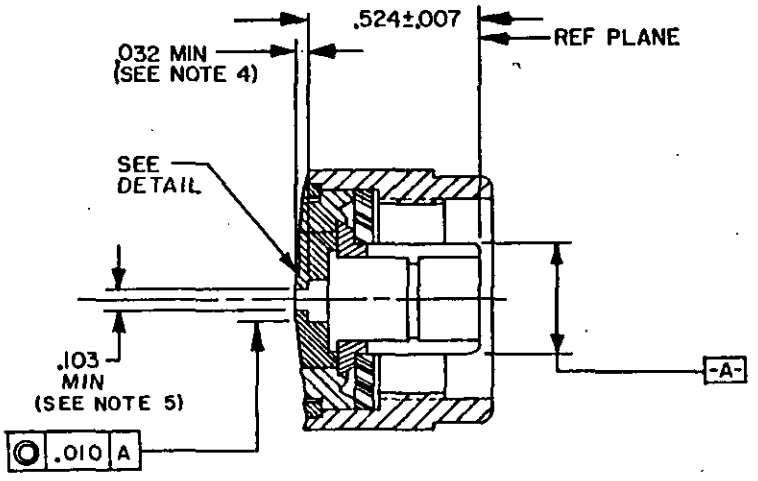

CATEGORY D

Inches	mm	Inches	mm
.007	0.18	.103	2.62
.010	0.25	.524	13.31
.032	0.81		



DETAIL


NOTES:
1. Dimensions are in inches.
2. Three holes .027 (0.69 mm) minimum diameter, equally spaced, are required for safety wiring after mating. Location on coupling nut optional.
3. Metric equivalents are given for general information only.
4. Chamfer is optional, if chamfer is used put chamfer on a 30° maximum.
5. Dimension shall meet connector performance requirements.

FIGURE 2. Mating dimensions for socket terminations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:37Z
Check the source to verify that this is the current version before use.

FIGURE 3, delete and substitute new figure 3 as follows:

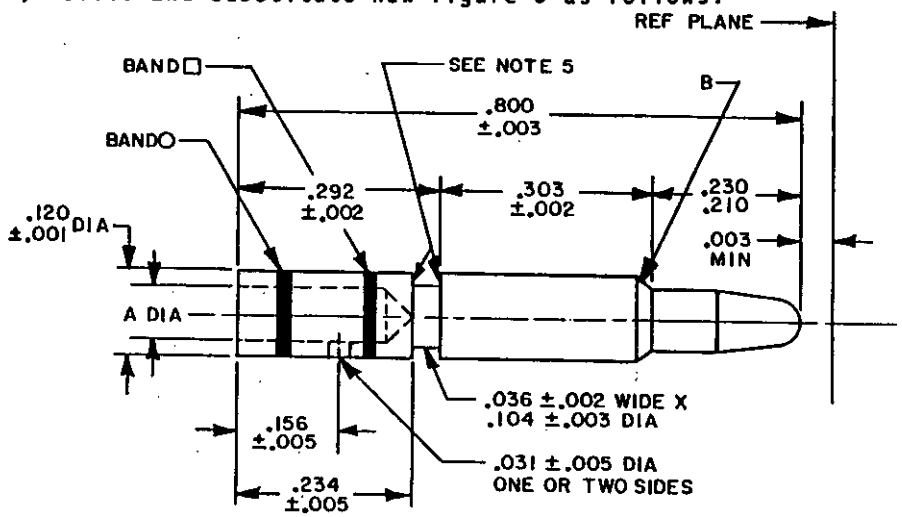

CENTER CONTACT

Inches	mm	Inches	mm
.001	0.03	.210	5.33
.002	0.05	.220	5.59
.003	0.08	.230	5.84
.005	0.13	.234	5.94
.008	0.20	.245	6.22
.015	0.38	.250	6.35
.031	0.79	.292	7.42
.036	0.91	.303	7.70
.043	1.09	.418	10.62
.098	2.49	.438	11.13
.104	2.64	.492	12.50
.120	3.05	.500	12.70
.156	3.96	.600	15.24
.206	5.23	.800	20.32


Dash no.	Contact no. 2/	A	B	Basic crimp tool 1/ M22520/1 6/	Crimp die or positioner M22520/1 6/	Crimp tensile min	Color band □	Color band ○
0501 0502	1-10	.098 ±.002	.008 ±.002 x 30° ±5°	-01	-13	60 lbs	Red	Black
0503 0504	1-11	.043 +.001 -.002		-01	-13	20 lbs	Blue	

FIGURE 3. Contact and ferrule dimensions for category D only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:37Z
Check the source to verify that this is the current version before use.

PAGE 6

FIGURE 3, delete and substitute new figure 3 as follows:

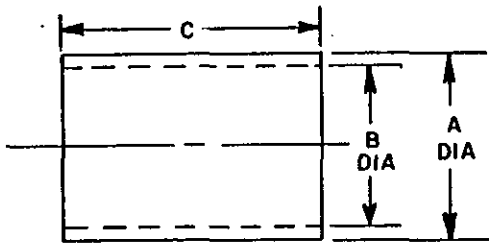

CRIMP FERRULE

Dash no.	Ferrule no. 2/	A	B	C	Basic crimp tool 1/ M22520/5	Crimp die or positioner M22520/5-
0501	1-50	.492 +.003 -.000	.438 +.003 -.000	.600 ±.015	-01	61 or 25 Closure A
0502	1-51		.418 +.003 -.000			
0503	1-52	.250 ±.003	.220 ±.003	.500 ±.015		05, 11, 57 Closure A or 19 Closure B
0504	1-53	.245 ±.003	.206 ±.003			

1/ Class 2 tool may be used by OEM (see MIL-C-22520).
2/ Contact numbers and ferrule numbers are for identification only.
6/ Optional tool, M22520/5-01 with M22520/5-25 closure B die.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Crimp tensile test shall be in accordance with MIL-C-39029.
4. Copyright notice: All information disclosed in these specification sheets which is or may be copyrighted is reproduced herein with the express permission of the copyright owner.
5. Maximum break = .003 (0.08 mm).

FIGURE 3. Contact and ferrule dimensions for category D only - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:37Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - EA, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3683-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:37Z
Check the source to verify that this is the current version before use.