INCH-POUND

NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-39012/2G
26 September 1994
SUPERSEDING
MIL-C-39012/2F
3 October 1986


PERFORMANCE SPECIFICATION SHEET

CONNECTORS, PLUGS AND RECEPTACLES, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES N (CABLED), FLANGE MOUNTED, SOCKET CONTACT, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-39012.

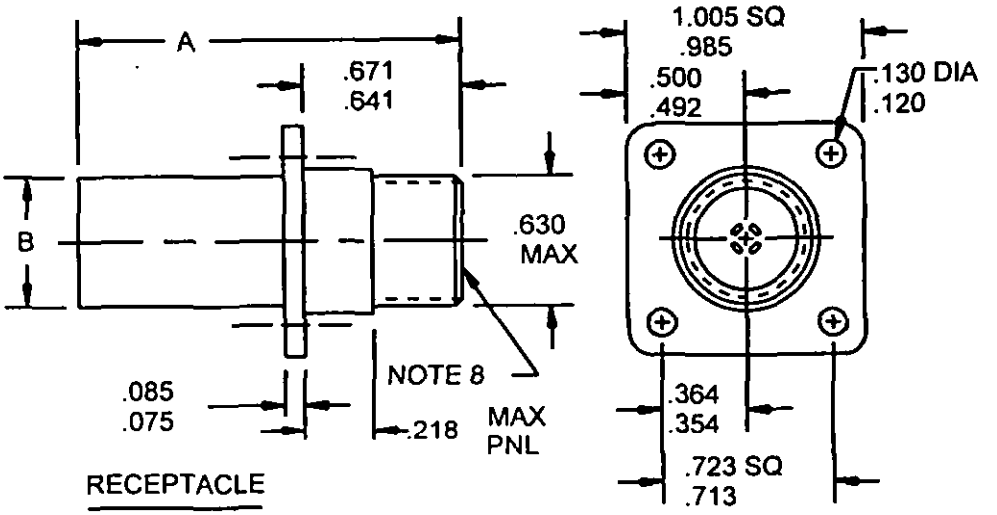

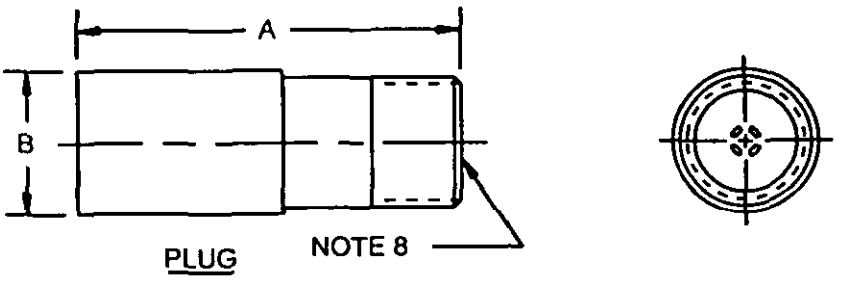


mm	Inches	mm	Inches	mm	Inches	mm		
.075	1.91	.218	5.54	.500	12.70	.713	18.11	
.086	2.16	.354	8.99	.630	16.00	.723	18.36	
.120	3.05	.364	9.25	.641	16.28	.985	25.02	
.130	3.30	.492	12.50	.671	17.04	1.005	25.53	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For dimensions A and B, see tables I and III.
4. Dimensions A and B are the largest overall dimensions of the connector less the flange.
5. Wrench flats are to accommodate standard wrench opening in accordance with FED-STD-H28, appendix 10.
6. All undimensioned pictorial representations are for reference purposes only.
7. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
8. Series N, socket contact interface, in accordance with MIL-STD-348.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T16:38Z
Check the source to verify that this is the current version before use.

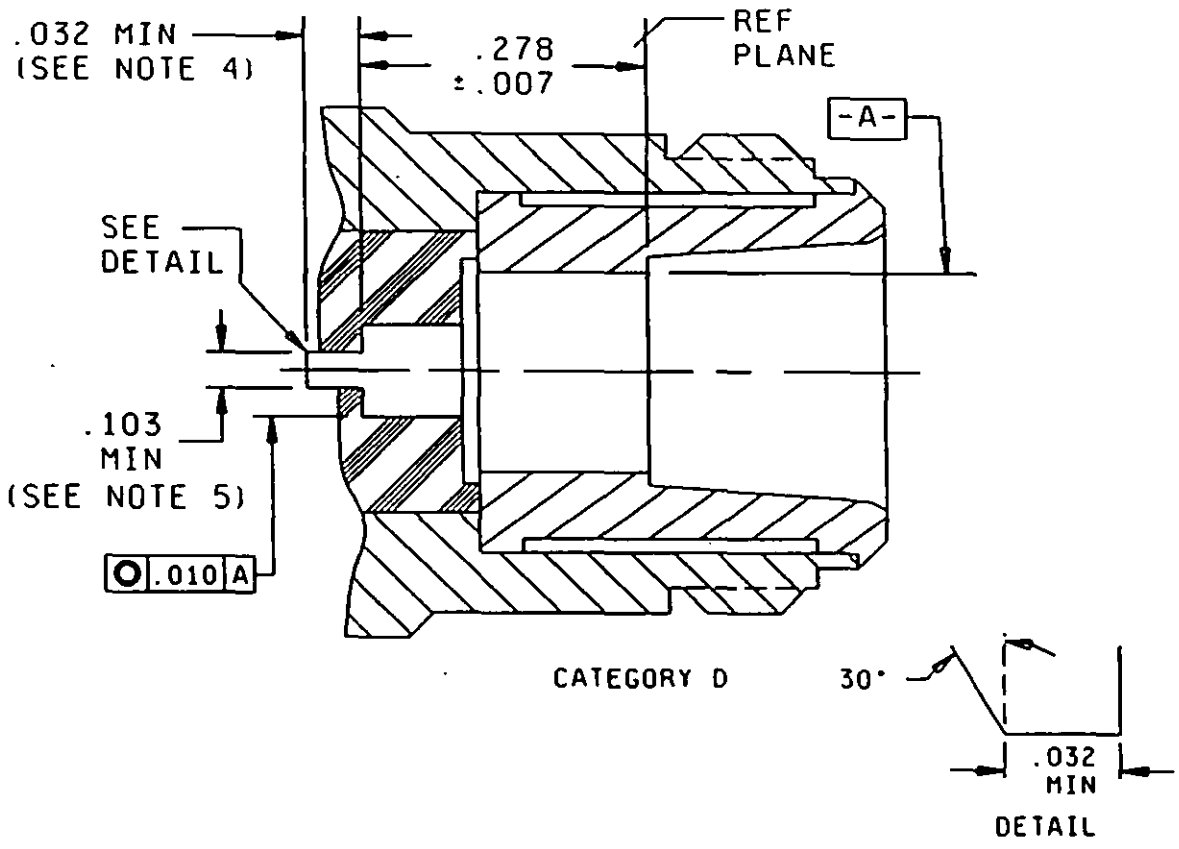

Inches	mm
.007	0.18
.010	0.25
.032	0.81
.103	2.62
.278	7.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Slot design optional.
4. Chamfer is optional, if chamfer is used put chamfer on a 30° maximum.
5. Dimension shall meet connector performance requirements.

FIGURE 2. Category D captivation detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions.

Dash number 1/	Type	Applicable cable 2/ M17/	Dimensions	Inches (millimeters) maximum
Category A - Field serviceable (no special tools required) 3/				
0101 Cable group VIII	Plug	2-RG006 4/ 73-RG212 162-00001 180-00001 4/ 188-00001 199-00001 112-RG304 5/ 171-00001	A B	1.672 (42.47) .781 (19.84)
0003 Cable group X	Plug	6-RG11 4/ 181-00001 4/ 62-RG144 4/ 65-RG165 159-00001 74-RG213 189-00001 163-00001 75-RG214 190-00001 164-00001 86-00001 6/ 127-RG393 5/ 174-00001 77-RG216 4/ 191-00001 4/		
0131 Cable group XI	Plug	74-RG215 5/ 7/ 189-00002	A B	2.350 (59.69) .781 (19.84
0134 Cable group XII	Plug	78-RG217 5/	A B	1.781 (44.84) .906 (23.01)
0104 Cable group VIII	Receptacle	2-RG006 4/ 73-RG212 162-00001 180-00001 4/ 188-00001 199-00001 112-RG304 5/ 171-00001	A B	1.672 (42.47) .750 (19.05)
0006 Cable group X	Receptacle	6-RG11 4/ 181-00001 4/ 62-RG144 4/ 65-RG165 159-00001 74-RG213 189-00001 163-00001 75-RG214 190-00001 164-00001 86-00001 6/ 127-RG393 5/ 174-00001 77-RG216 4/ 191-00001 4/		
0132 Cable group XI	Receptacle	74-RG215 5/ 7/ 189-00002	A B	2.350 (59.69) .781 (19.84)
0133 Cable group XII	Receptacle	78-RG217 5/ 165-00001	A B	1.781 (44.84) .906 (23.01)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

Dash number 1/	Type	Applicable cable 2/ M17/	Dimensions	Inches (millimeters) maximum
Category C - Field replaceable (MIL-C-22520 crimp tool) See footnote next to cable for applicable crimp die 3/ 8/				
0019 Cable group VIII (supersedes -0040) 13/	Plug	2-RG006 4/ 9/ 73-RG212 9/ 162-00001 9/ 180-00001 4/ 9/ 188-00001 9/ 199-00001 9/ 112-RG304 5/ 9/ 171-00001 9/		
0020 Cable group XA (supersedes -0024) 13/	Plug	74-RG213 10/ 65-RG165 57 6/ 10/ 159-00001 10/ 189-00001 10/ 163-00001 10/		
0021 Cable group XB (supersedes -0025) 13/	Plug	75-RG214 10/ 190-00001 10/ 174-00001 10/ 164-00001 10/ 86-00001 67 10/ 127-RG393 5/ 10/	A B	1.938 (49.23) .781 (19.84)
0026 Cable group XC	Plug	6-RG11 4/ 10/ 181-00001 47 10/ 62-RG144 47 57 6/ 10/		
0039 Cable group XD	Plug	77-RG216 4/ 5/ 6/ 10/ 191-00001 10/		
0027 Cable group VIII (supersedes -0043) 13/	Receptacle	2-RG006 4/ 9/ 73-RG212 9/ 162-00001 9/ 180-00001 4/ 9/ 188-00001 9/ 199-00001 9/ 112-RG304 5/ 9/ 171-00001 9/		
0028 Cable group XA (supersedes -0041) 13/	Receptacle	74-RG213 10/ 65-RG165 57 6/ 10/ 159-00001 10/ 189-00001 10/ 163-00001 10/		
0029 Cable group XB (supersedes -0034) 13/	Receptacle	75-RG214 10/ 190-00001 10/ 174-00001 10/ 164-00001 10/ 86-00001 67 10/ 127-RG393 5/ 10/	A B	1.938 (49.23) .781 (19.84)
0030 Cable group XD	Receptacle	77-RG216 4/ 5/ 6/ 10/ 191-00001 10/		
0042 Cable group XC	Receptacle	6-RG11 4/ 10/ 181-00001 47 10/ 62-RG144 47 57 6/ 10/		

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

Dash number 1/	Type	Applicable cable 2/ M17/	Dimensions	Inches (millimeters) maximum
Category D - Field replaceable - Defined piece parts 3/ 8/ 11/ 12/				
0501 Cable group XB	Plug	75-RG214 190-00001 164-00001 86-00001 127-RG393 5/ 174-00001	A	1.656 (42.07)
0502 Cable group XA	Plug	74-RG213 65-RG165 5/ 159-00001 189-00001 163-00001	B	.750 (19.05)
0503 Cable group VIB	Plug	60-RG142 6/ 158-00001 84-RG223 167-00001 194-00001 200-00001 128-RG400 5/ 175-00001	A	1.593 (40.48)
0504 Cable group VIB	Plug	28-RG058 155-00001 183-00001 197-00001 111-RG303 5/ 170-00001	B	.750 (19.05)
0511 Cable group XB	Receptacle	75-RG214 190-00001 164-00001 86-00001 127-RG393 5/ 174-00001	A	1.656 (42.07)
0512 Cable group XA	Receptacle	74-RG213 65-RG165 5/ 159-00001 189-00001 163-00001	B	.750 (19.05)
0513 Cable group VIB	Receptacle	60-RG142 6/ 158-00001 84-RG223 167-00001 194-00001 200-00001 128-RG400 5/ 175-00001	A	1.593 (40.48)
0514 Cable group VIA	Receptacle	28-RG058 155-00001 183-00001 197-00001 111-RG303 5/ 170-00001	B	.750 (19.05)

See foonnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions - Continued.

1/ For cross-reference of dash number to superseded PIN or type designation, see table IV.

2/ The latest version of each cable shall be applicable.

3/ These connectors have captivated center contacts.

4/ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage and insertion loss are not applicable.

5/ Cable to be used when performing tests requiring cable except as in 4/ and 6/.

6/ Cable to be used for the +200°C temperature cycling tests.

7/ Armored cable.

8/ These connectors are assembled using the applicable crimp tool, to the specified cables stripped as shown on figure 4.

9/ M22520/5-35 closure A or M22520/5-55 closure A.


10/ M22520/5-61.

11/ Complete connector assembly shall consist of a body, center contact, ferrule and assembly instructions.

12/ Not to be used in army equipment.

13/ The superseding dash numbers are acceptable for government use until stock is purged or 3 years from the date of this specification which ever is earlier.

Source: https://assist.dla.mil -- Downloaded: 202640-21T16:38Z
Check the source to verify that this is the currenversion before use.

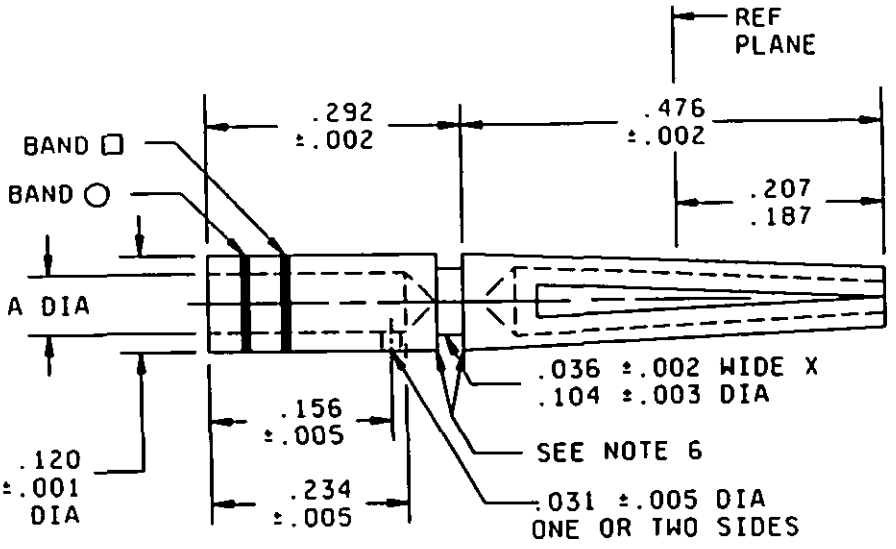

CENTER CONTACT

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.043	1.09	.207	5.26	.438	11.13
.002	0.05	.098	2.49	.220	5.59	.476	12.09
.003	0.08	.104	2.64	.234	5.94	.492	12.50
.005	0.13	.120	3.05	.245	6.22	.500	12.70
.015	0.38	.156	3.96	.250	6.35	.600	15.24
.031	0.79	.187	4.75	.292	7.42		
.036	0.91	.206	5.23	.418	10.62		


Dash no.	Contact no. 1/	Dimension A	Basic crimp tool 2/ M22520/1	Crimp die or positioner M22520/1 3/	Crimp tensile minimum (pounds)	Color band □	Color band ○
0501 0502 0511 0512	2-10	.098 ±.002	-01	-13	60	Red	Brown
0503 0504 0513 0514	2-11	.043 +.001 -.002	-01	-13	20	Blue	Brown

1/ Contact numbers are for identification only.
2/ Class 2 tool may be used by OEM (see MIL-C-22520).
3/ Optional tool: M22520/5-01 with M22520/5-25 closure B die.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Contact material shall be phosphor bronze or copper beryllium.
4. Crimp tensile test shall be in accordance with MIL-C-39029.
5. Copyright notice: All information disclosed in these specification sheet which is or may be copyrighted is reproduced herein with the express permission of the copyright owner.
6. Maximum break of .003 inch (0.08 mm).
7. Color bands shall be positioned such that no coloring material enters the inspection hole.

FIGURE 3. Contact and ferrule dimensions for category D only.


Source: https://assist.dla.mil -- Downloaded: 202610-21T16:38Z
Check the source to verify that this is the current version before use.

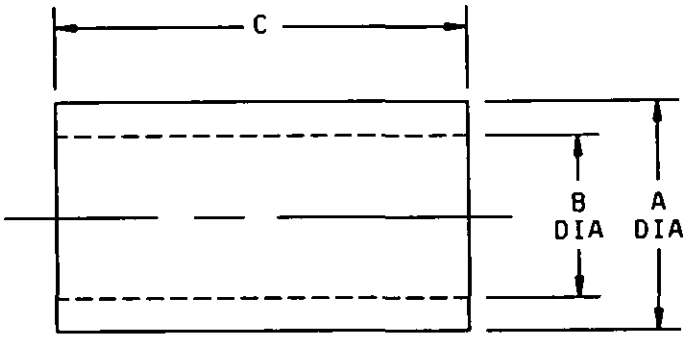

Dash number	Ferrule number 1/	A ±.003	B ±.003	C ±.015	Basic crimp tool 2/	Crimp die or positioner M22520/5-
0501 0511	2-50	.492	.438	.600	M22520/5-01	25 Closure A or 61
0502 0512	2-51	.492	.418	.600		
0503 0513	2-52	.250	.220	.500		
0504 0514	2-53	.245	.206	.500		5, 11, 57 Closure A or 19 Closure B

1/ Ferrule numbers are for identification only.
2/ Class 2 tools may be used by OEM (see MIL-C-22520).

FIGURE 3. Contact and ferrule dimensions for category D only - Continued.

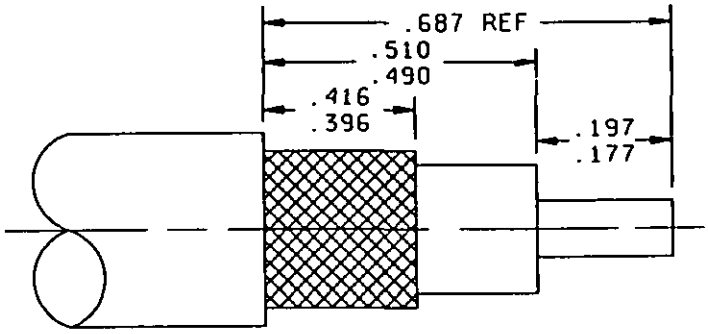

Inches	mm
.177	4.50
.197	5.00
.396	10.06
.416	10.57
.490	12.45
.510	12.95
.687	17.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 4. Cable stripping dimensions for field replaceable connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range: 0 to 11,000 MHz.

Voltage rating:

1,000 volts rms maximum working voltage at sea level.

250 volts rms maximum at 70,000 feet.

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Design and configuration: See figure 1.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 6 inch-pounds maximum.

Coupling proof torque: Not applicable.

Inspection conditions: Coupling torque: 6 to 10 inch-pounds.

Mating characteristics: See figure 2 and MIL-STD-348 for dimensions.

Center contact (socket):

Oversize test pin: .074 diameter minimum, 16 microinch finish (nonclosed entry contacts only).

Insertion depth: .125 minimum.

Number of insertions: 1.

Insertion force test: Steel test pin diameter .066 minimum.

Test pin finish: 16 microinches.

Insertion force: 2 pounds maximum.

Withdrawal force test: Steel test pin diameter .063 maximum.

Withdrawal force: 2 ounces minimum.

Test pin finish: 16 microinches.

Hermetic seal: Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Method 302 of MIL-STD-202, test condition B. 5,000 megohms minimum.

Center contact retention: (Applicable to captivated-center-contact connectors only.) 15 pounds minimum axial force for all cables except RG400 and RG142; 6 pounds minimum for RG400 and RG142.

Corrosion (salt spray): Method 101 of MIL-STD-202, test condition B.

Voltage standing wave ratio (VSWR): From 500 to 11,000 MHz, or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower; 1.30 maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

Swept frequency VSWR test setup:

Item 6: VSWR shall be less than 1.008 +.002 F (F in GHz).

Item 16: VSWR shall be less than 1.008 +.002 F (F in GHz).

Second step of VSWR checkout procedure - VSWR shall be less than 1.012 +.004 F (F in GHz).

Group B inspection - VSWR shall be less than 1.024 +.007 F (F in GHz).

Qualification and group C inspection - VSWR shall not exceed 1.08.

Connector durability: 500 cycles minimum at 12 cycles/minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms maximum.

	Initial	After environment
Center contact	1.0	1.5
Outer contact	.2	Not applicable
Braid to body	.05	Not applicable

Dielectric withstanding voltage: Method 301 of MIL-STD-202. 2,500 volts rms minimum at sea level for connectors using other than RG400 and RG142; 1,500 volts rms minimum for connectors using RG400 and RG142.

Vibration, high frequency: Method 204 of MIL-STD-202, test condition B. No discontinuity permitted.

Shock: Method 213 of MIL-STD-202, test condition I. No discontinuity permitted.

Thermal shock: Method 107 of MIL-STD-202, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see table I and III).

Moisture resistance: Method 106 of MIL-STD-202. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level:

Voltage: 500 volts rms minimum.

Altitude: 70,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 1,500 volts rms tested at a frequency from 5 to 7.5 MHz.

Leakage current: Not applicable.

Cable retention force:

Noncrimp assemblies: 75 pounds minimum.

Crimp assemblies:

50 lbs minimum for cables .155-.189 OD.
60 lbs minimum for cables .190-.229 OD.
75 lbs minimum for cables .230-.249 OD.
90 lbs minimum for cables .250 OD and larger.

Coupling mechanism retention force: Not applicable.

RF leakage: -90 dB minimum, tested at a frequency between 2 and 3 GHz.

Insertion loss: .15 dB maximum at 10 GHz.

Part or Identifying Number (PIN): M39012/02- (dash number from table I or "B" number from table III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE II. Group qualification. 1/

Group	Submission and qualification of any of the following connectors 2/ M39012/	Qualifies the following connectors M39012/
I	02-0101 02-0003 02-0104 03-0101	02-0101 02-0003 02-0104 03-0101
II	02-0003 02-0006 03-0012	02-0003 02-0006 03-0012
III	02B0007 02B0008 02B0009 02B0012 02B0013 02B0015 02B0016 02B0017 03B0003 03B0004 03B0005 03B0008 03B0009	02B0007 02B0008 02B0009 02B0012 02B0013 02B0014 02B0015 02B0016 02B0017 02B0018 03B0003 03B0004 03B0005 03B0008 03B0009 03B0010 03B0011
IV	02-0019 02-0020 02-0021 02-0024 02-0025 02-0026 02-0027 02-0028 02-0029 02-0030 02-0034 03-0013 03-0014 03-0015 03-0016 03-0018 03-0019	02B0007 02B0008 02B0009 02B0012 02B0013 02B0014 02B0015 02B0016 02B0017 02B0018 02-0019 02-0020 02-0021 02-0024 02-0025 02-0026 02-0027 02-0028 02-0029 02-0030 02-0034 03B0003 03B0004 03B0005 03B0008 03B0009 03B0010 03B0011 03-0013 03-0014 03-0015 03-0016 03-0018 03-0019 03-0020 03-0021

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE II. Group qualification - Continued. 1/

Group	Submission and qualification of any of the following connectors 2/ M39012/	Qualifies the following connectors M39012/
V	02B0014 02B0018 03B0010 03B0011	02B0014 02B0018 03B0010 03B0011
VI	02-0026 02-0030 02-0039 02-0040 02-0042 02-0043 03-0020 03-0021	02B0014 02B0018 02-0026 02-0030 02-0039 02-0040 02-0042 02-0043 03B0010 03B0011 03-0020 03-0021
VII	02-0131 02-0132 02-0133	02-0131 02-0132 02-0133
VIII	02-0034 02B0036 02B0037 02B0038 02B0044	02-0034 02B0036 02B0037 02B0038 02B0044
IX	02B0035	02B0035
X	02-0501 02-0502 02-0511 02-0512	02-0501 02-0502 02-0503 02-0511 02-0512 02-0513
XI	02-0503 02-0513	02-0503 02-0513
XII	02-0504 02-0514	02-0504 02-0514

1/ If a connector manufacturer produces a connector which meets all the requirements for two or more connector PIN's (within the same series), the manufacturer may receive qualification approval for two or more connector PIN's by qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own appropriate PIN. For group qualification, the connectors must be of similar design.

2/ For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of those parts in order to retain qualification for those parts in the corresponding right-hand column. The part does not necessarily have to be the part initially qualified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE III. CATEGORY B - NONFIELD REPLACEABLE (SPECIAL TOOLS MAY BE REQUIRED). 1/

NOT FOR ARMY, NAVY, OR AIR FORCE USE. FOR OEM USE ONLY

PIN 2/ M39012/02B	Type	Applicable cable 3/ M17/	Dimensions	Inches (millimeters) maximum
0007 4/	Plug	073-RG212 5/ RG-222/U	A B	1.938 (49.23) .781 (19.84)
0008 4/	Plug	074-RG213 5/		
0009 4/	Plug	75-RG214 5/		
0012 4/	Plug	65-RG165 5/ 6/		
0013 4/	Plug	RG-225/U 5/ 6/		
0014 4/	Plug	62-RG144 5/ 6/ 7/ 6-RG11 7/		
0018 4/	Plug	77-RG216 5/ 7/		
0044 8/	Plug	2-RG6 5/ 7/		
0015 4/	Receptacle	073-RG212 5/ RG-222/U	A B	1.938 (49.23) .750 (19.05)
0016 4/	Receptacle	074-RG213 5/		
0017 4/	Receptacle	75-RG214 5/		
0035 8/	Receptacle	65-RG165 5/ 6/		
0036 8/	Receptacle	6-RG11 7/ 62-RG144 5/ 6/ 7/		
0037 8/	Receptacle	77-RG216 5/ 7/		
0038 8/	Receptacle	2-RG6 5/ 7/		

1/ For maintenance replacements for category B, see table V.

2/ For cross-reference of dash number to superseded PIN or type designation, see table IV.

3/ The latest version of each cable shall be applicable.

4/ Inactive for new design.

5/ Cable to be used when performing tests requiring cable except as in 6/ and 7/.

6/ Cable to be used for the +200°C temperature cycling tests.

7/ These are not 50-ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.

8/ These connectors have captivated center contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Cross-reference of PIN's. 1/

Preferred PIN M39012/02	Substitute for PIN or type designation
-0101	MS91233-20D, M39012/02-0001
-0003	MS91237-23F
-0003	MS91235-1186A, M39012/02-0002
-0104	MS91233-19E, M39012/02-0004
-0006	MS91237-22F
-0006	MS90536-1187A, M39012/02-0005
B0007	M23329/2-11, UG-1687/U, M39012/02-0011, UG-1691/U, M39012/02-0007
B0008	M23329/2-12, UG1688/U, M39012/02-0008
B0009	M23329/2-16, UG1689/U, M39012/02-0009
B0012	M23329/2-17, UG1692/U, M39012/02-0012
B0013	M23329/2-18, UG1693/U, M39012/02-0013
B0014	M23329/2-19, UG1694/U, M39012/02-0014
B0015	UG-1696/U, M39012/02-0015
B0016	UG-1697/U, M39012/02-0016
B0017	UG-1698/U, M39012/02-0017
B0018	UG-1818/U, M39012/02-0018
-0019	M39012/02-0023
-0020	
-0021	
-0024	
-0025	
-0026	
-0027	
-0028	
-0029	
-0030	
-0131	UG-940C/U, M39012/02-0031
-0132	UG-935D/U, M39012/02-0032
-0133	
-0034	
B0035	M39012/02-0035
B0036	M39012/02-0036
B0037	M39012/02-0037
B0038	M39012/02-0038
-0039	
-0040	
-0041	
-0042	
-0043	
B0044	M39012/02-0044
-0501	
-0502	
-0503	
-0504	
-0511	M39012/02-0033
-0512	
-0513	
-0514	UG-1095/U

1/. The superseded PIN or the type designation is for cross-reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN M39012/02-XXXX shall be used in all cases for marking and identifying the connector.

2/ The basic type designation includes all letter versions of the specified number, e.g., UG-18/U includes UG-18A/U, UG-18B/U, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.

TABLE V. Maintenance replacements for category B.

Category B number 1/	Category C dash number	Category A dash number	Category D dash number
PLUGS			
B0007	0019	0101	---
B0008	0020	0003	0502
B0009	0021	0003	0501
B0012	0024	0003	---
B0013	0025	0003	0501
B0014	0026	0003	---
B0044	0040	0101	---
RECEPTACLES			
B0015	0027	0104	---
B0016	0028	0006	0512
B0017	0029	0006	0511
B0033	0034	0006	0511
B0035	0041	0006	---
B0036	0042	0006	---
B0037	0030	0006	---
B0038	0043	0104	---

1/ Category B connectors are for original installation only. They will not be stocked or procured by the Government.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, AT, EA, MI
Navy - AS, MC, OS, SH
Air Force - 11, 19, 99

Preparing activity:
DLA - ES

(Project 5935-3932-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:38Z
Check the source to verify that this is the current version before use.