NOT MEASUREMENT SENSITIVE

MIL-I-15665/2H
18 September 1991
SUPERSEDING
MIL-I-15665/2G
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, EP: AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-15665.

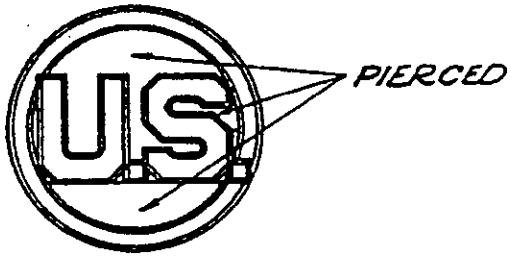

MATERIAL: Red brass or zinc aluminum

DIMENSIONS:
DIAMETER (Outside): 1 inch (2.54 cm) (REF)
THICKNESS (Outer edge of rim): .055 inch ± .005 inch (0.139 cm ± 0.012 cm)

FINISH: Copper plated (zinc aluminum only), nickel plated, mirror-like polished

NOTES:
1. The reverse of the insignia shall be spherically dapped to a radius of 1-5/8 inches ± 1/8 inch (4.13 cm ± 0.32 cm).
2. Attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal centerline and the center of the rim.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
DLA - CT

(Project No. 8455-N615)

User activity:
Air Force - 45

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:24Z
Check the source to verify that this is the current version before use.