NOT MEASUREMENT SENSITIVE

MIL-I-15665/2J
30 July 1992
SUPERSEDING
MIL-I-15665/2H
18 September 1991

MILITARY SPECIFICATION SHEET

INSIGNIA, COLLAR, EP; "U.S.", AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-15665.

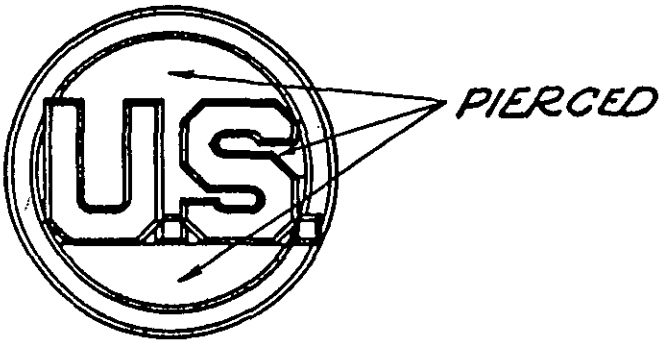

MATERIAL: Red Brass or Zinc Aluminum

FINISH: Nickel Plated, Mirror-like Polished

DIMENSIONS:
DIAMETER: 1 inch (2.54 cm) (REF)
THICKNESS (Outside Edge of Rim): 0.055 inch ± 0.005 inch (0.140 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:24Z
Check the source to verify that this is the current version before use.

NOTE:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. In addition to the finish specified, the zinc aluminum shall be copper plated to begin the finishing process.

3. Pierced areas shall be as indicated.

4. The reverse of the insignia shall be spherically dapped to a radius of 1-5/8 inches ± 1/8 inch (4.13 cm ± 0.32 cm).

5. The attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal center line and the center of rim.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User Activity:
Air Force - 45

Preparing activities:
Army - IH

(Project No. 8455-0680)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:24Z
Check the source to verify that this is the current version before use.