MIL-STD-1320-159B

(NAVY)

13 OCTOBER 1993

SUPERSEDING
MIL-STD-1320-159A
30 MAY 1980

MILITARY STANDARD

TRUCKLOADING

PHOENIX MISSILE AIM-54C (WITH WINGS AND FINS) IN SHIPPING AND STORAGE CONTAINER CNU-242A/E

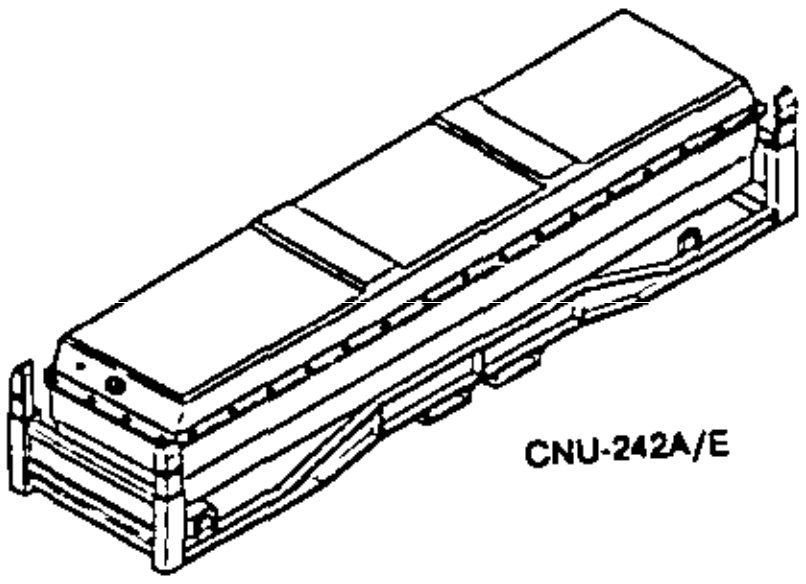

CONTAINER DATA

DIMENSIONS:

LENGTH	168
WIDTH	38
HEIGHT	30
STACKING HEIGHT	25-1/2
GROSS WEIGHT (APPROX.)	3,080 LBS
EMPTY WEIGHT (APPROX.)	1,000 LBS
CUBE	110.8 CU-FT

◆ DO NOT USE FOR SHIPPING WEIGHT.

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030.

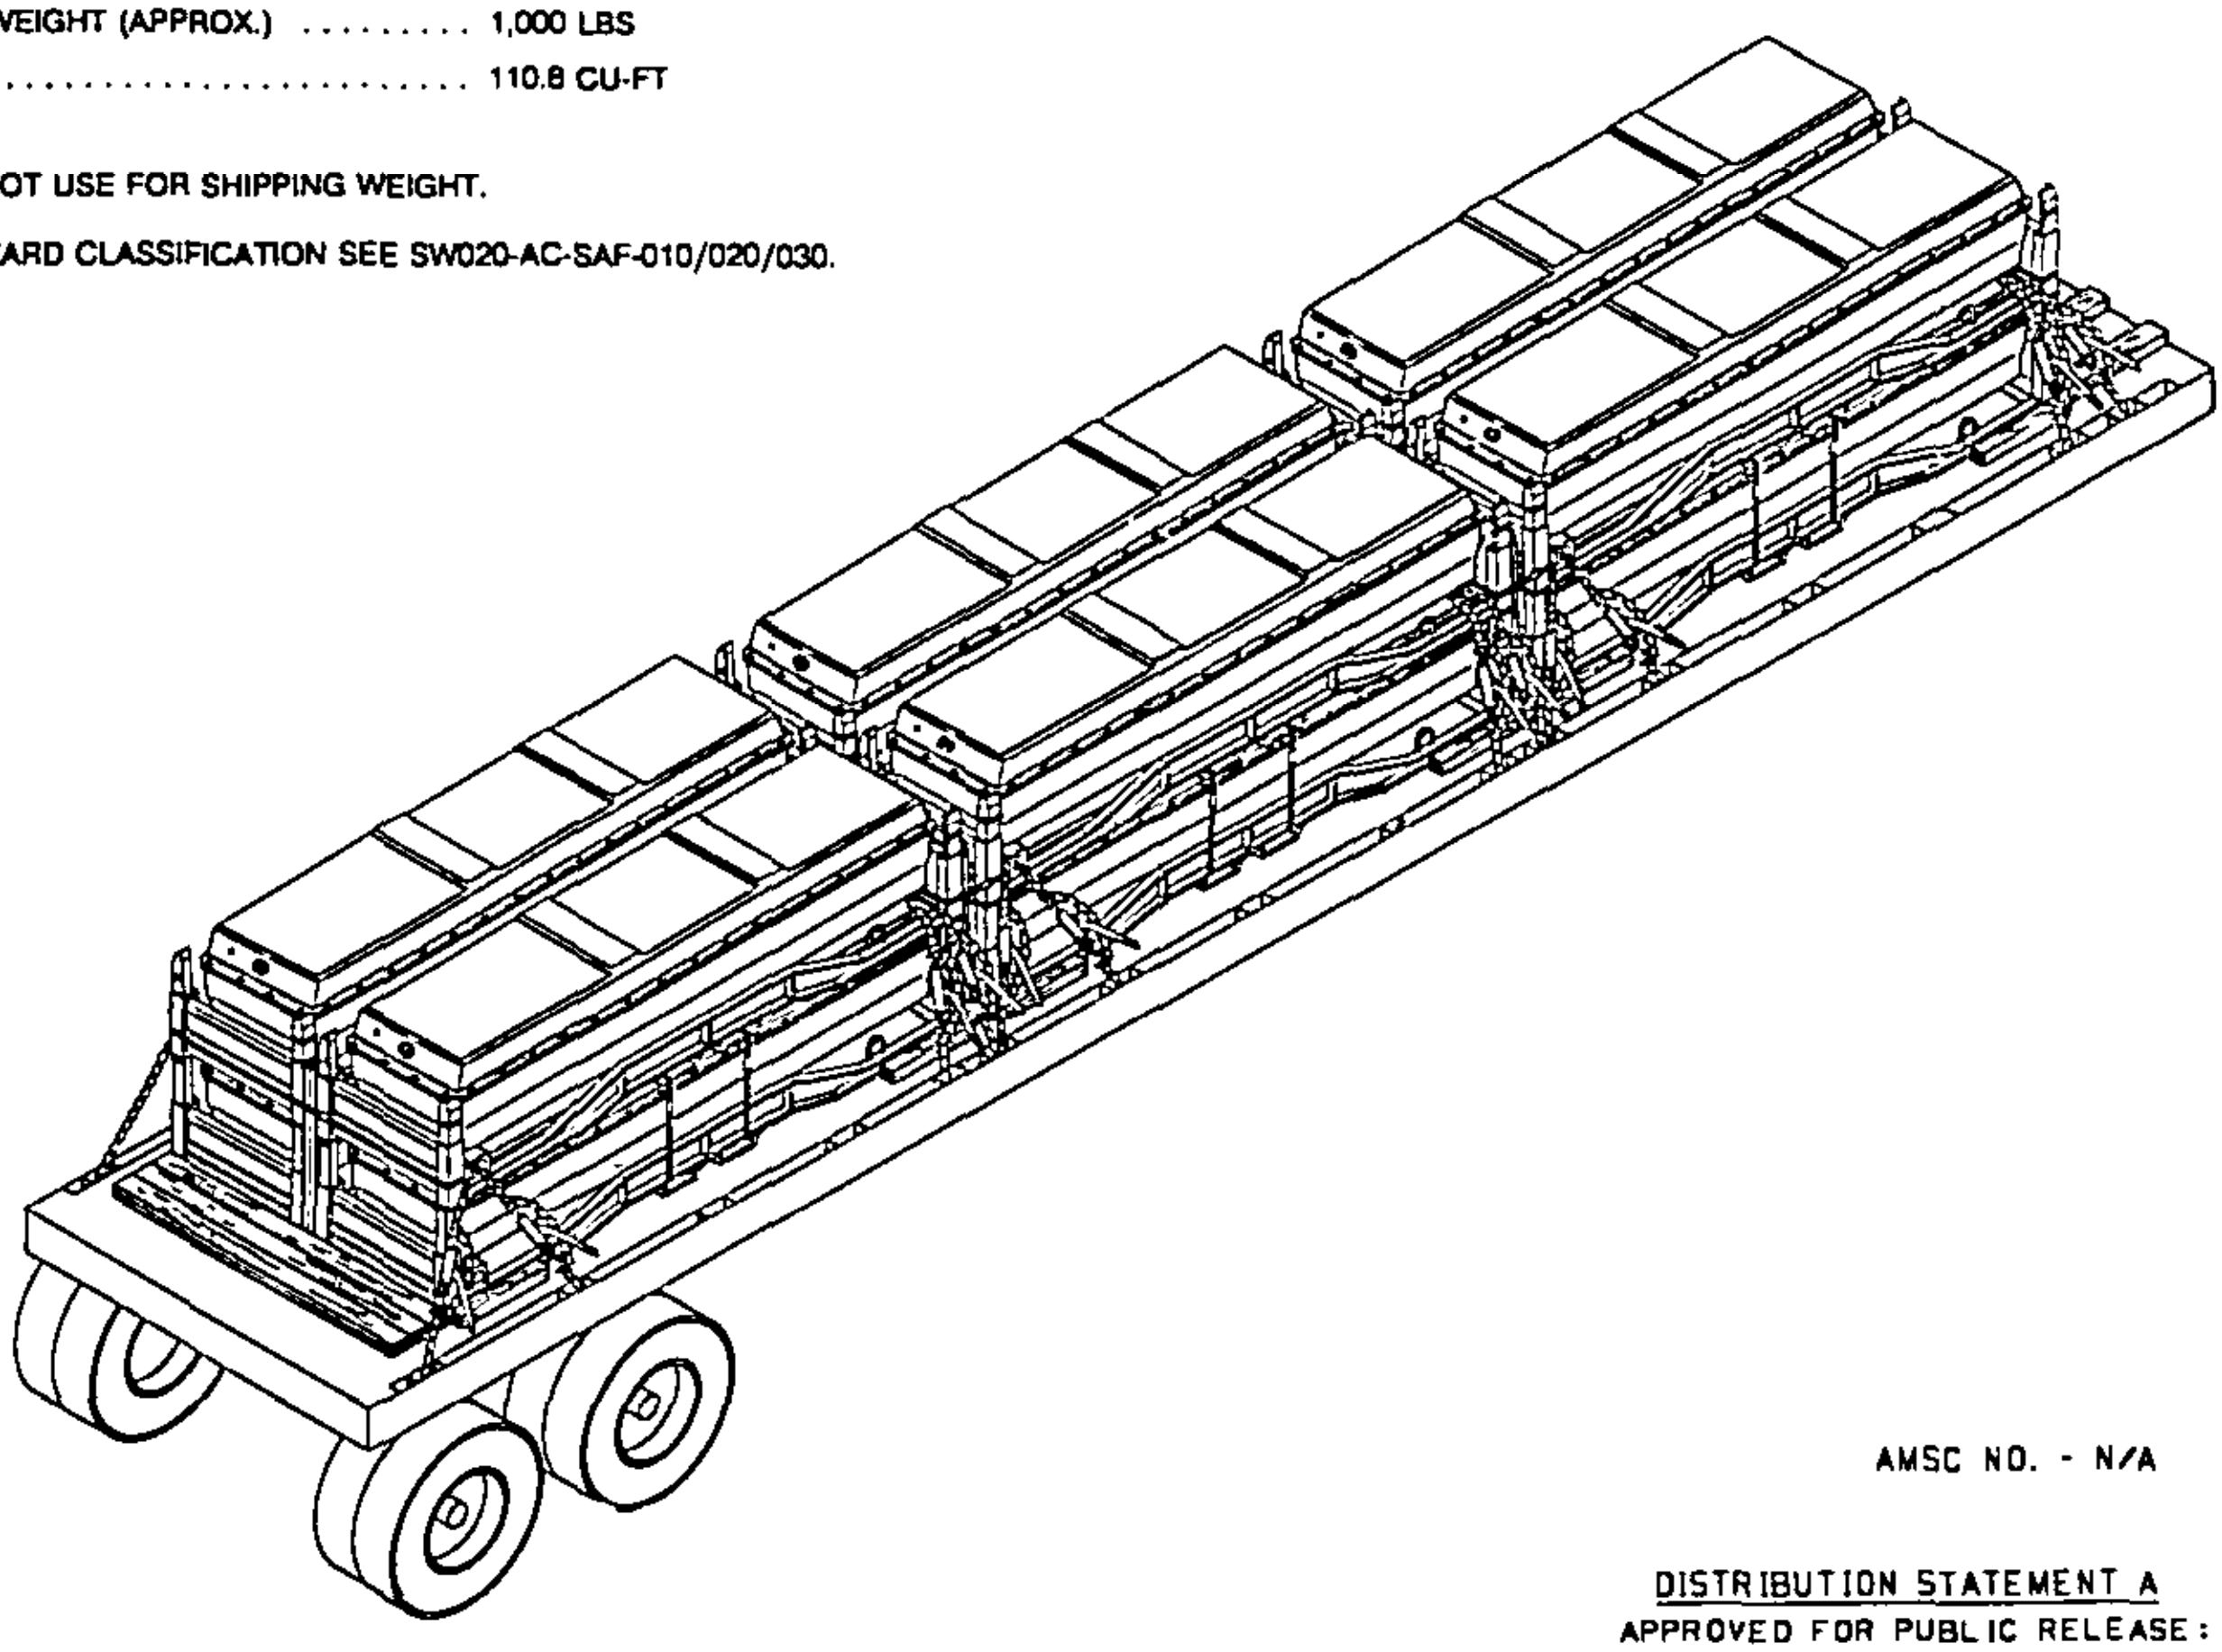

AMSC NO. - N/A

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

B	REVISED DOCUMENT TO ALLOW CONTAINERS TO BE SHIPPED TWO-HIGH	[illegible]	SRP	
REV LTR	REVISION DESCRIPTION	DATE	APPROVAL TDA	APPROVAL SYSCOM

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. *FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING,* CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

S/M.S. GRAY 5/20/80
SIGNATURE TDA, WPNSTA EARLE DATE

S/J.E. KELLY 5/20/80
SIGNATURE AIRSYSCOM BY DIRECTION DATE

ORIGINATOR S/CHARLES McBRIDE 5/20/80
DATE

WPNSTA EARLE, NEW JERSEY

GENERAL NOTES:

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE PHOENIX MISSILE AIM-54C (WITH WINGS AND FINS) IN THE SHIPPING AND STORAGE CONTAINER CNU-242A/E.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR FLATBED TRAILERS OR TRUCKS. DO NOT USE TRAILERS OR TRUCKS WITH ALL METAL FLOORS.
3. CHAINS ONLY MAY BE USED FOR TIEDOWNS. STEEL STRAPPING IS NOT PERMITTED.
4. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCK-LOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
5. THE MAXIMUM NUMBER OF CONTAINERS THAT CAN BE LOADED ONTO A TRAILER IS AS FOLLOWS.

48 FT TRAILERS	12 CONTAINERS
37 THRU 47 FT TRAILERS	8 CONTAINERS
20 THRU 36 FT TRAILERS	4 CONTAINERS

6. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
7. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE LOAD SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS.
10. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
11. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

FTL 48 FT TRAILER (FLATBED)

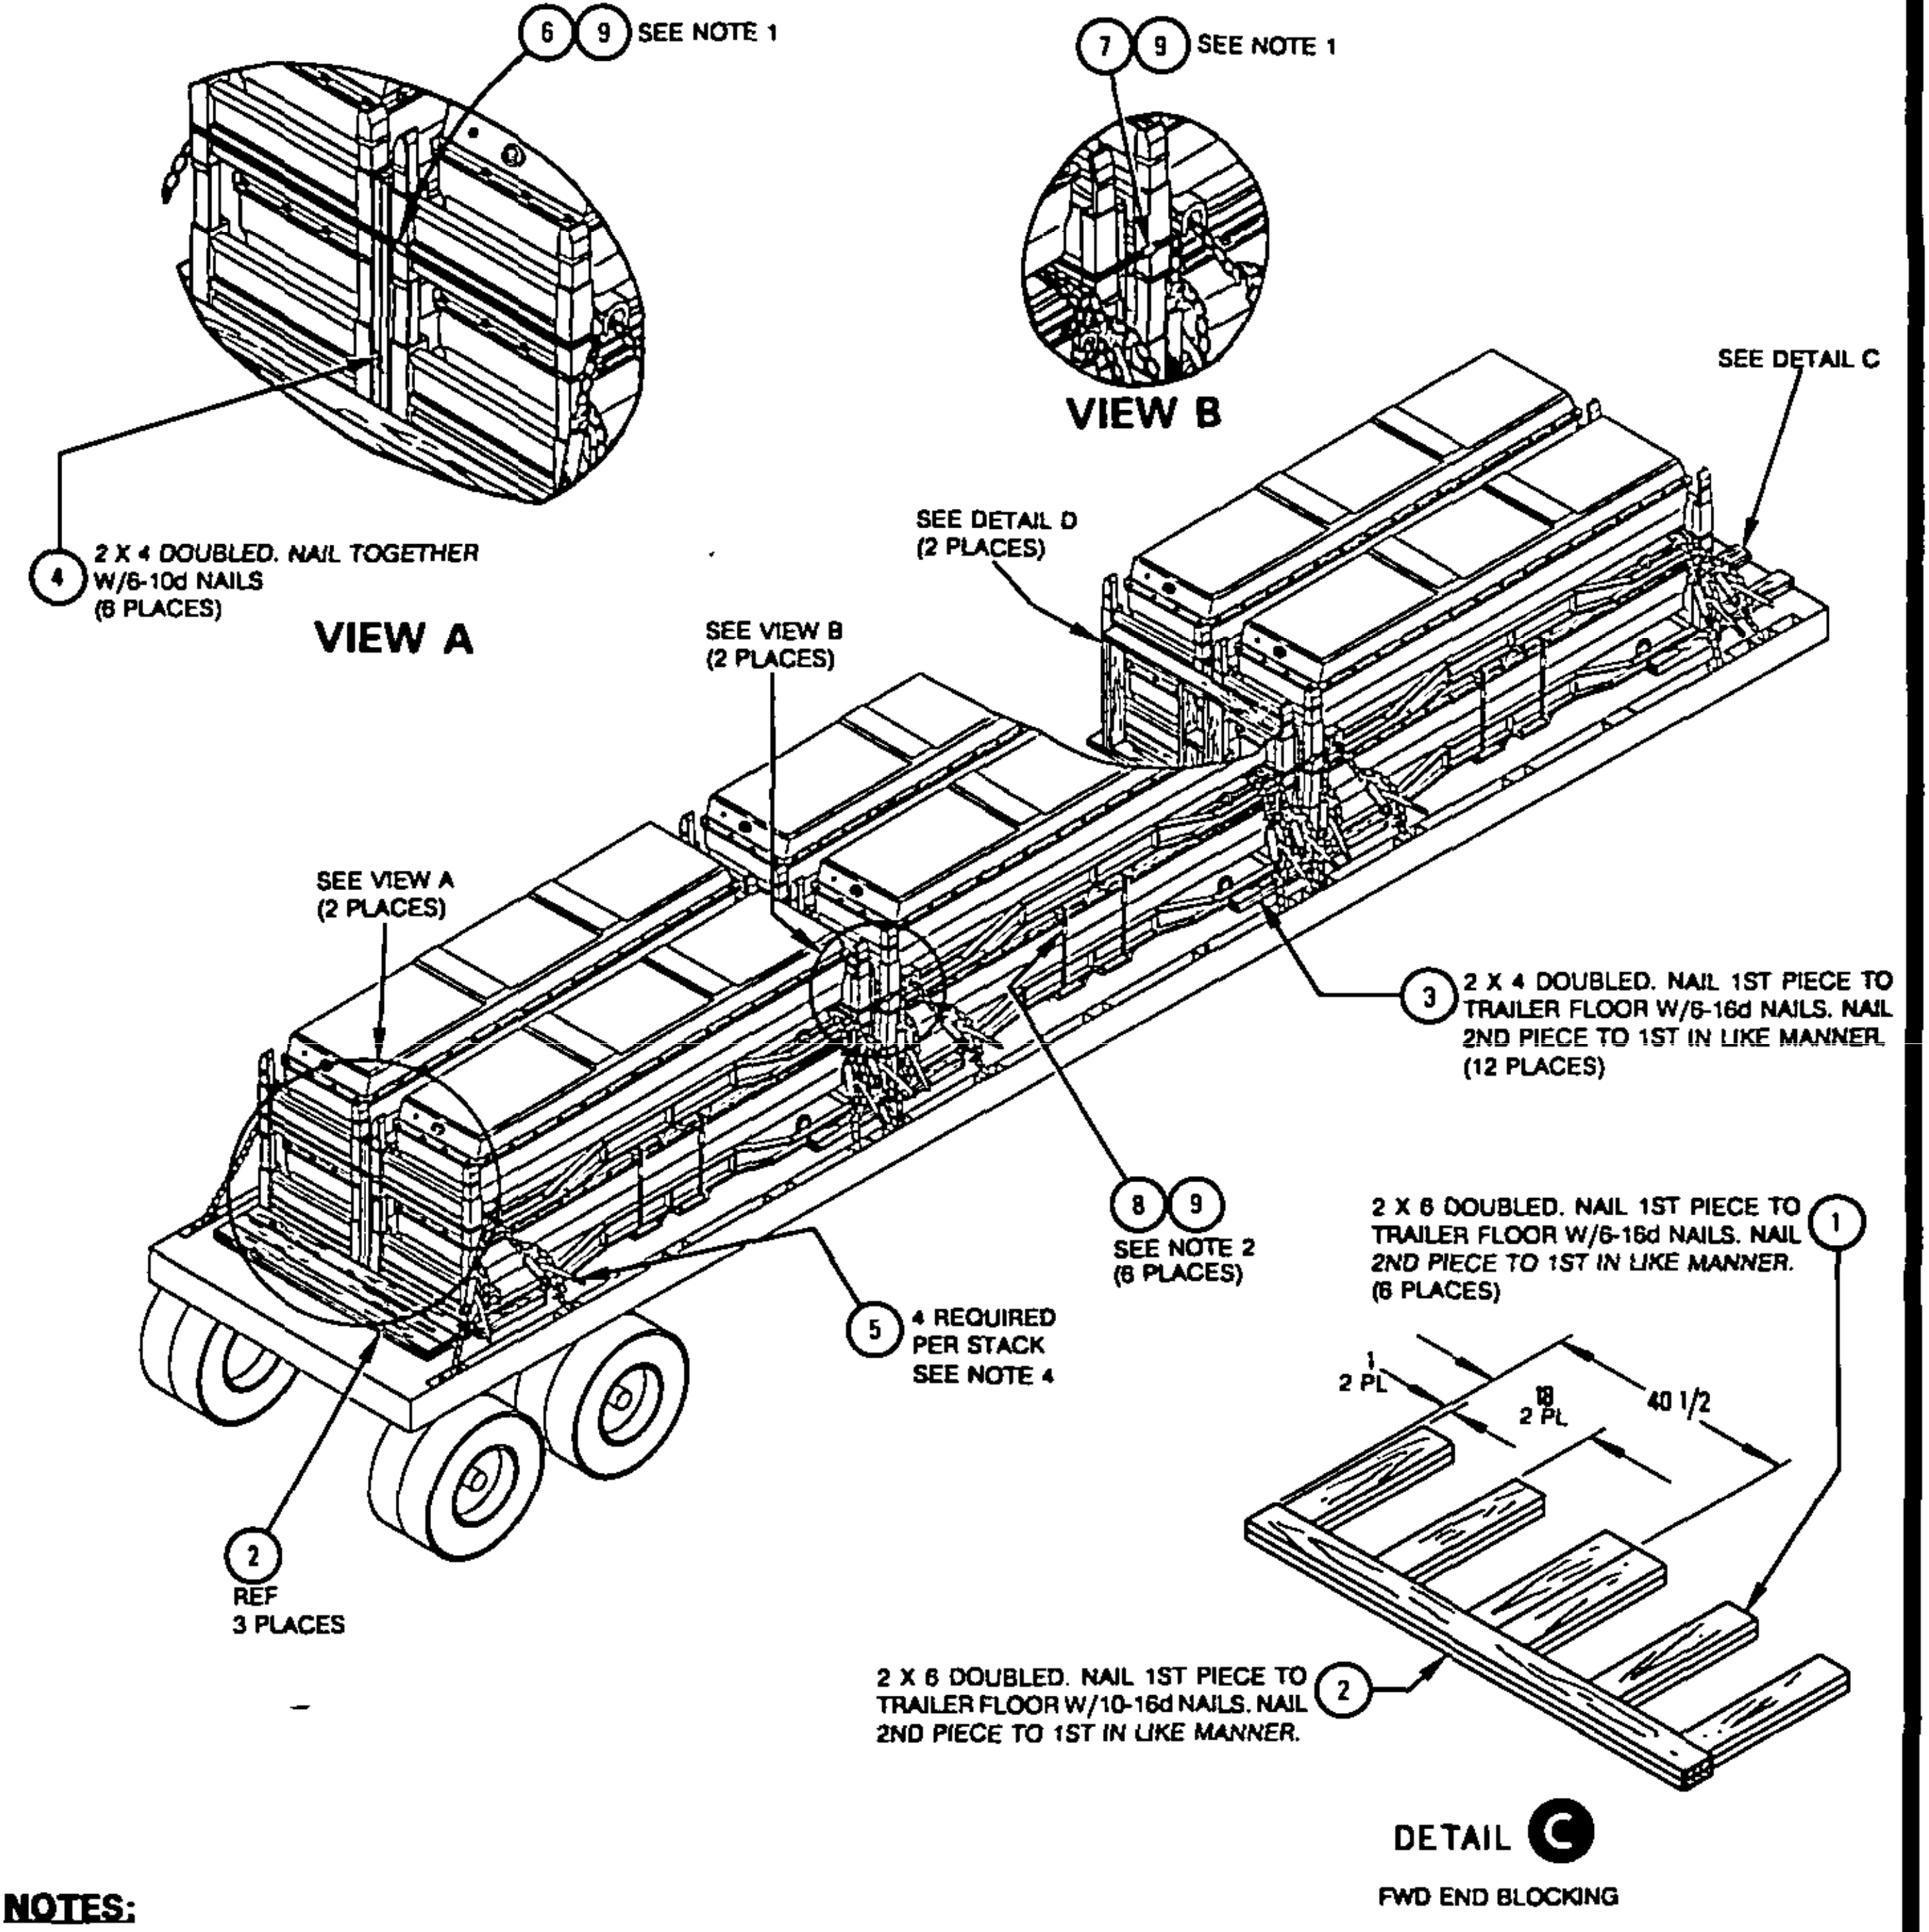
6 9 SEE NOTE 1
7 9 SEE NOTE 1
VIEW B
SEE DETAIL C
4 2 X 4 DOUBLED. NAIL TOGETHER W/6-10d NAILS (6 PLACES)
VIEW A
SEE DETAIL D (2 PLACES)
SEE VIEW B (2 PLACES)
SEE VIEW A (2 PLACES)
3 2 X 4 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (12 PLACES)
8 9 SEE NOTE 2 (6 PLACES)
2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (6 PLACES) 1
5 4 REQUIRED PER STACK SEE NOTE 4
1 2 PL
18 2 PL
40 1/2
2 REF 3 PLACES
2 X 6 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/10-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. 2
DETAIL C
FWD END BLOCKING

NOTES:

1. TENSION AND SEAL END STRAPS AND CENTER STRAPS, ITEMS 6 AND 7, BEFORE APPLYING FORK POCKET STRAPS, ITEM 8. BE SURE THAT CONTAINERS ARE FIRMLY UP AGAINST THE SEPARATOR BLOCKS, ITEM 4, BEFORE TENSIONING STRAPS.
2. FORK POCKET STRAPS, ITEM 8, PASS THROUGH THE FORK POCKETS OF BOTH TOP CONTAINERS AND RETURN THROUGH THE FORK POCKETS OF BOTH BOTTOM CONTAINERS.
3. STACKING ARMS OF ALL CONTAINERS IN THE UPPER LAYER SHALL BE IN THE DOWN POSITION.
4. CHAINS, ITEM 5, PASS UNDER CONTAINER POD THROUGH THE STACK FROM ONE SIDE OF THE TRAILER TO THE OTHER. CHAINS SHALL NOT BE TENSIONED UNTIL ALL FLOOR BLOCKING AND STRAPPING HAS BEEN APPLIED.

ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
9	STRAP SEAL	STEEL	1-1/4" SIZE
8	FORK POCKET STRAP	STEEL	1-1/4 X .035 X 20 FT
7	CENTER STRAP	STEEL	1-1/4 X .035 X 18 FT
6	END STRAP	STEEL	1-1/4 X .035 X 16 FT
5	CHAIN & LOADBINDER	STEEL	
4	SEPARATOR	WOOD	2 X 4 X 42
3	SLEEPER	WOOD	2 X 4 X 24
2	CROSSMEMBER	WOOD	2 X 6 X 81
1	BACKUP CLEAT	WOOD	2 X 6 X 28

LIST OF MATERIALS

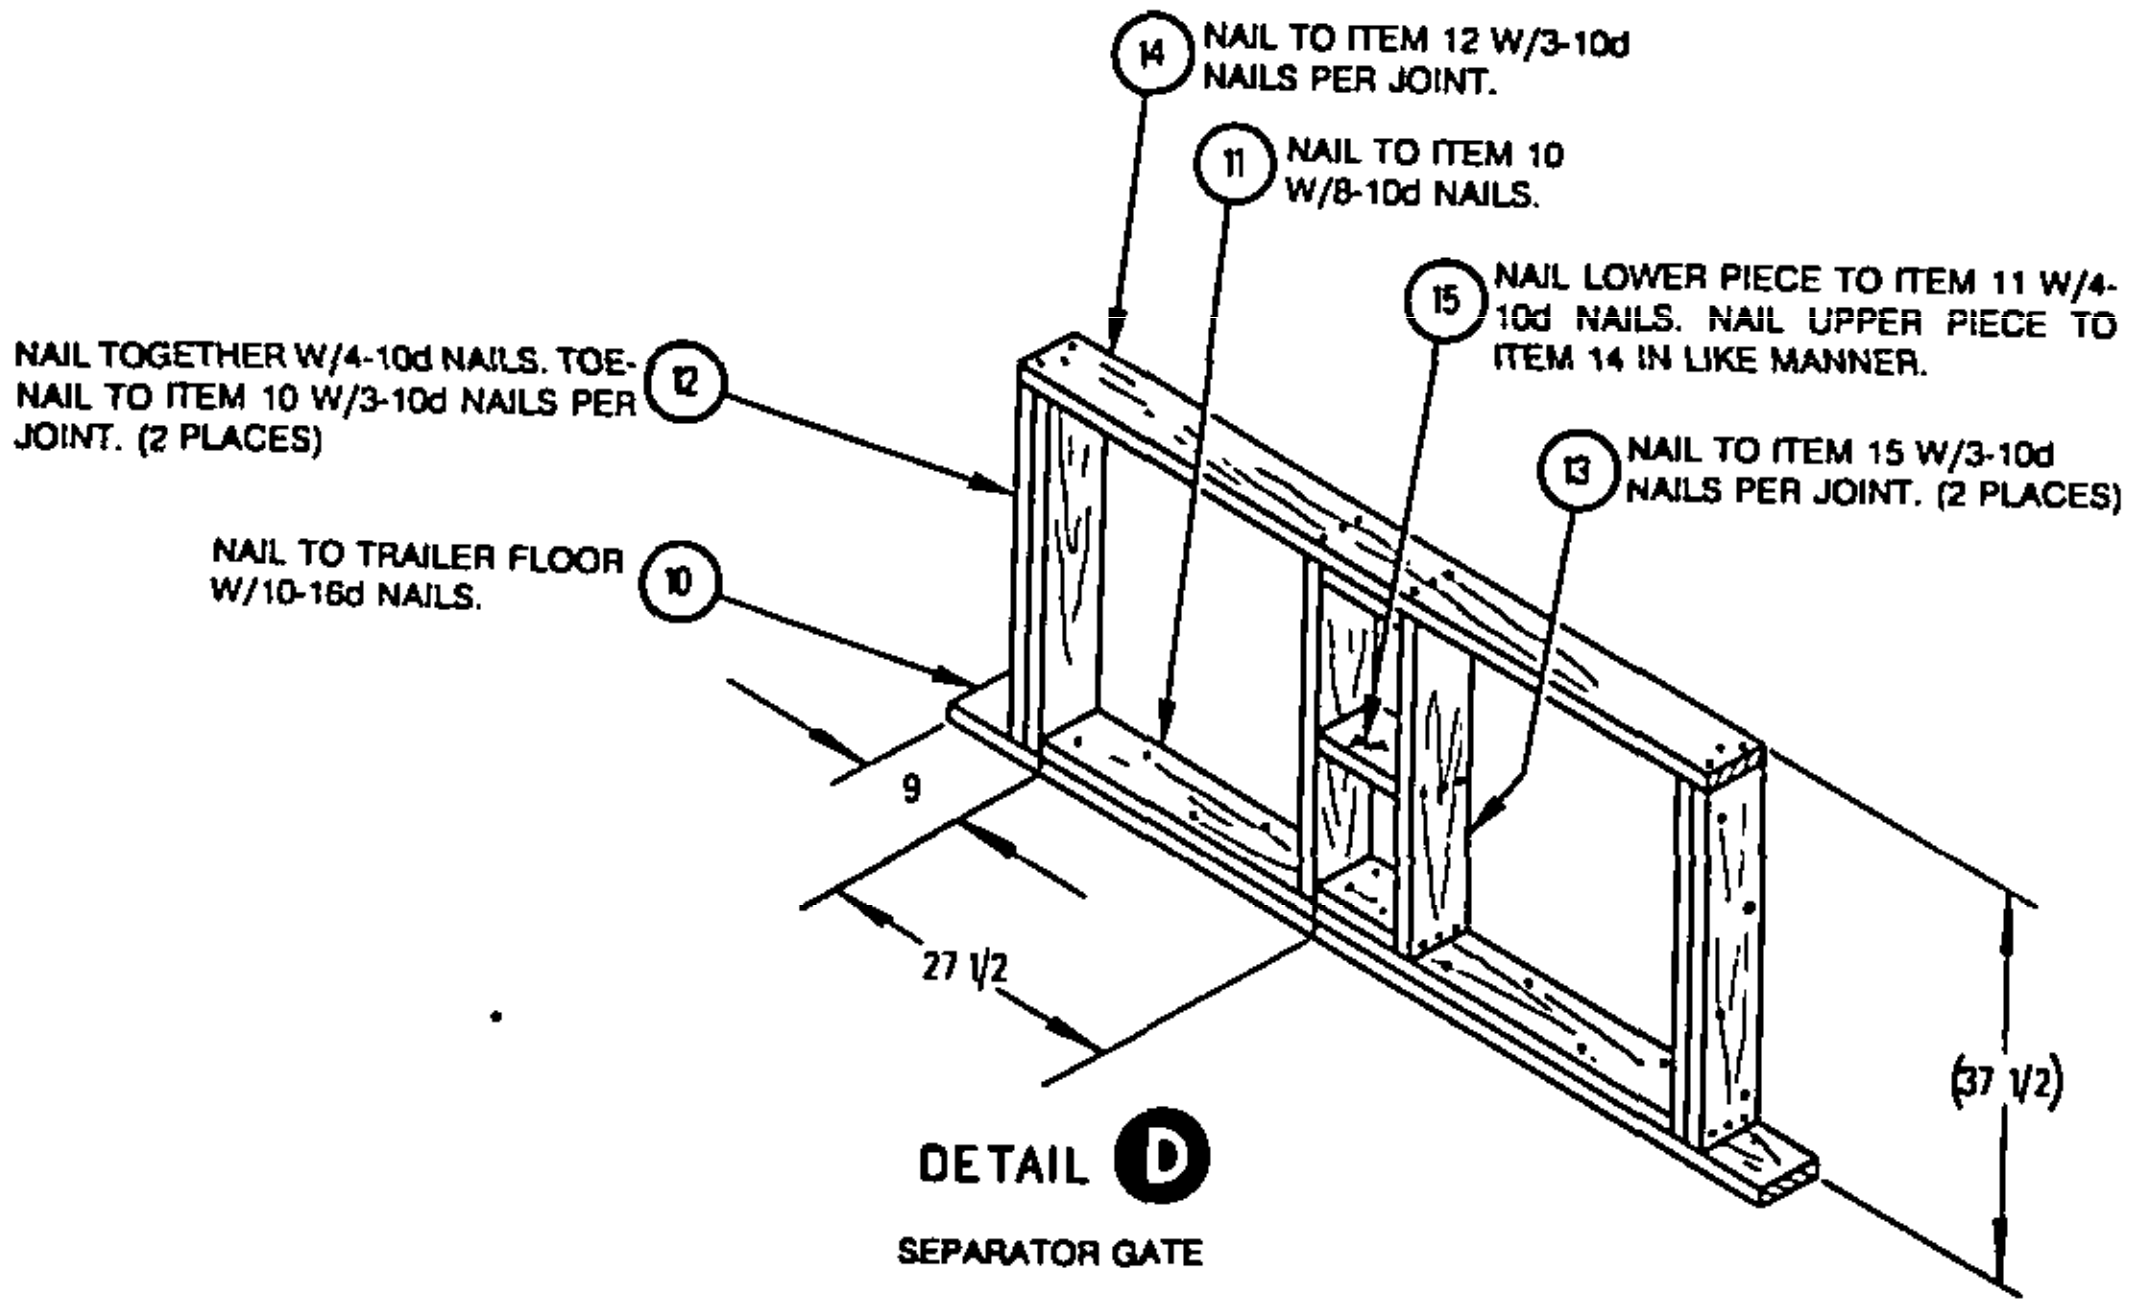
14 NAIL TO ITEM 12 W/3-10d NAILS PER JOINT.
11 NAIL TO ITEM 10 W/8-10d NAILS.
15 NAIL LOWER PIECE TO ITEM 11 W/4-10d NAILS. NAIL UPPER PIECE TO ITEM 14 IN LIKE MANNER.
NAIL TOGETHER W/4-10d NAILS. TOE-NAIL TO ITEM 10 W/3-10d NAILS PER JOINT. (2 PLACES) 12
13 NAIL TO ITEM 15 W/3-10d NAILS PER JOINT. (2 PLACES)
NAIL TO TRAILER FLOOR W/10-16d NAILS. 10
9
27 1/2
(37 1/2)

DETAIL D

SEPARATOR GATE

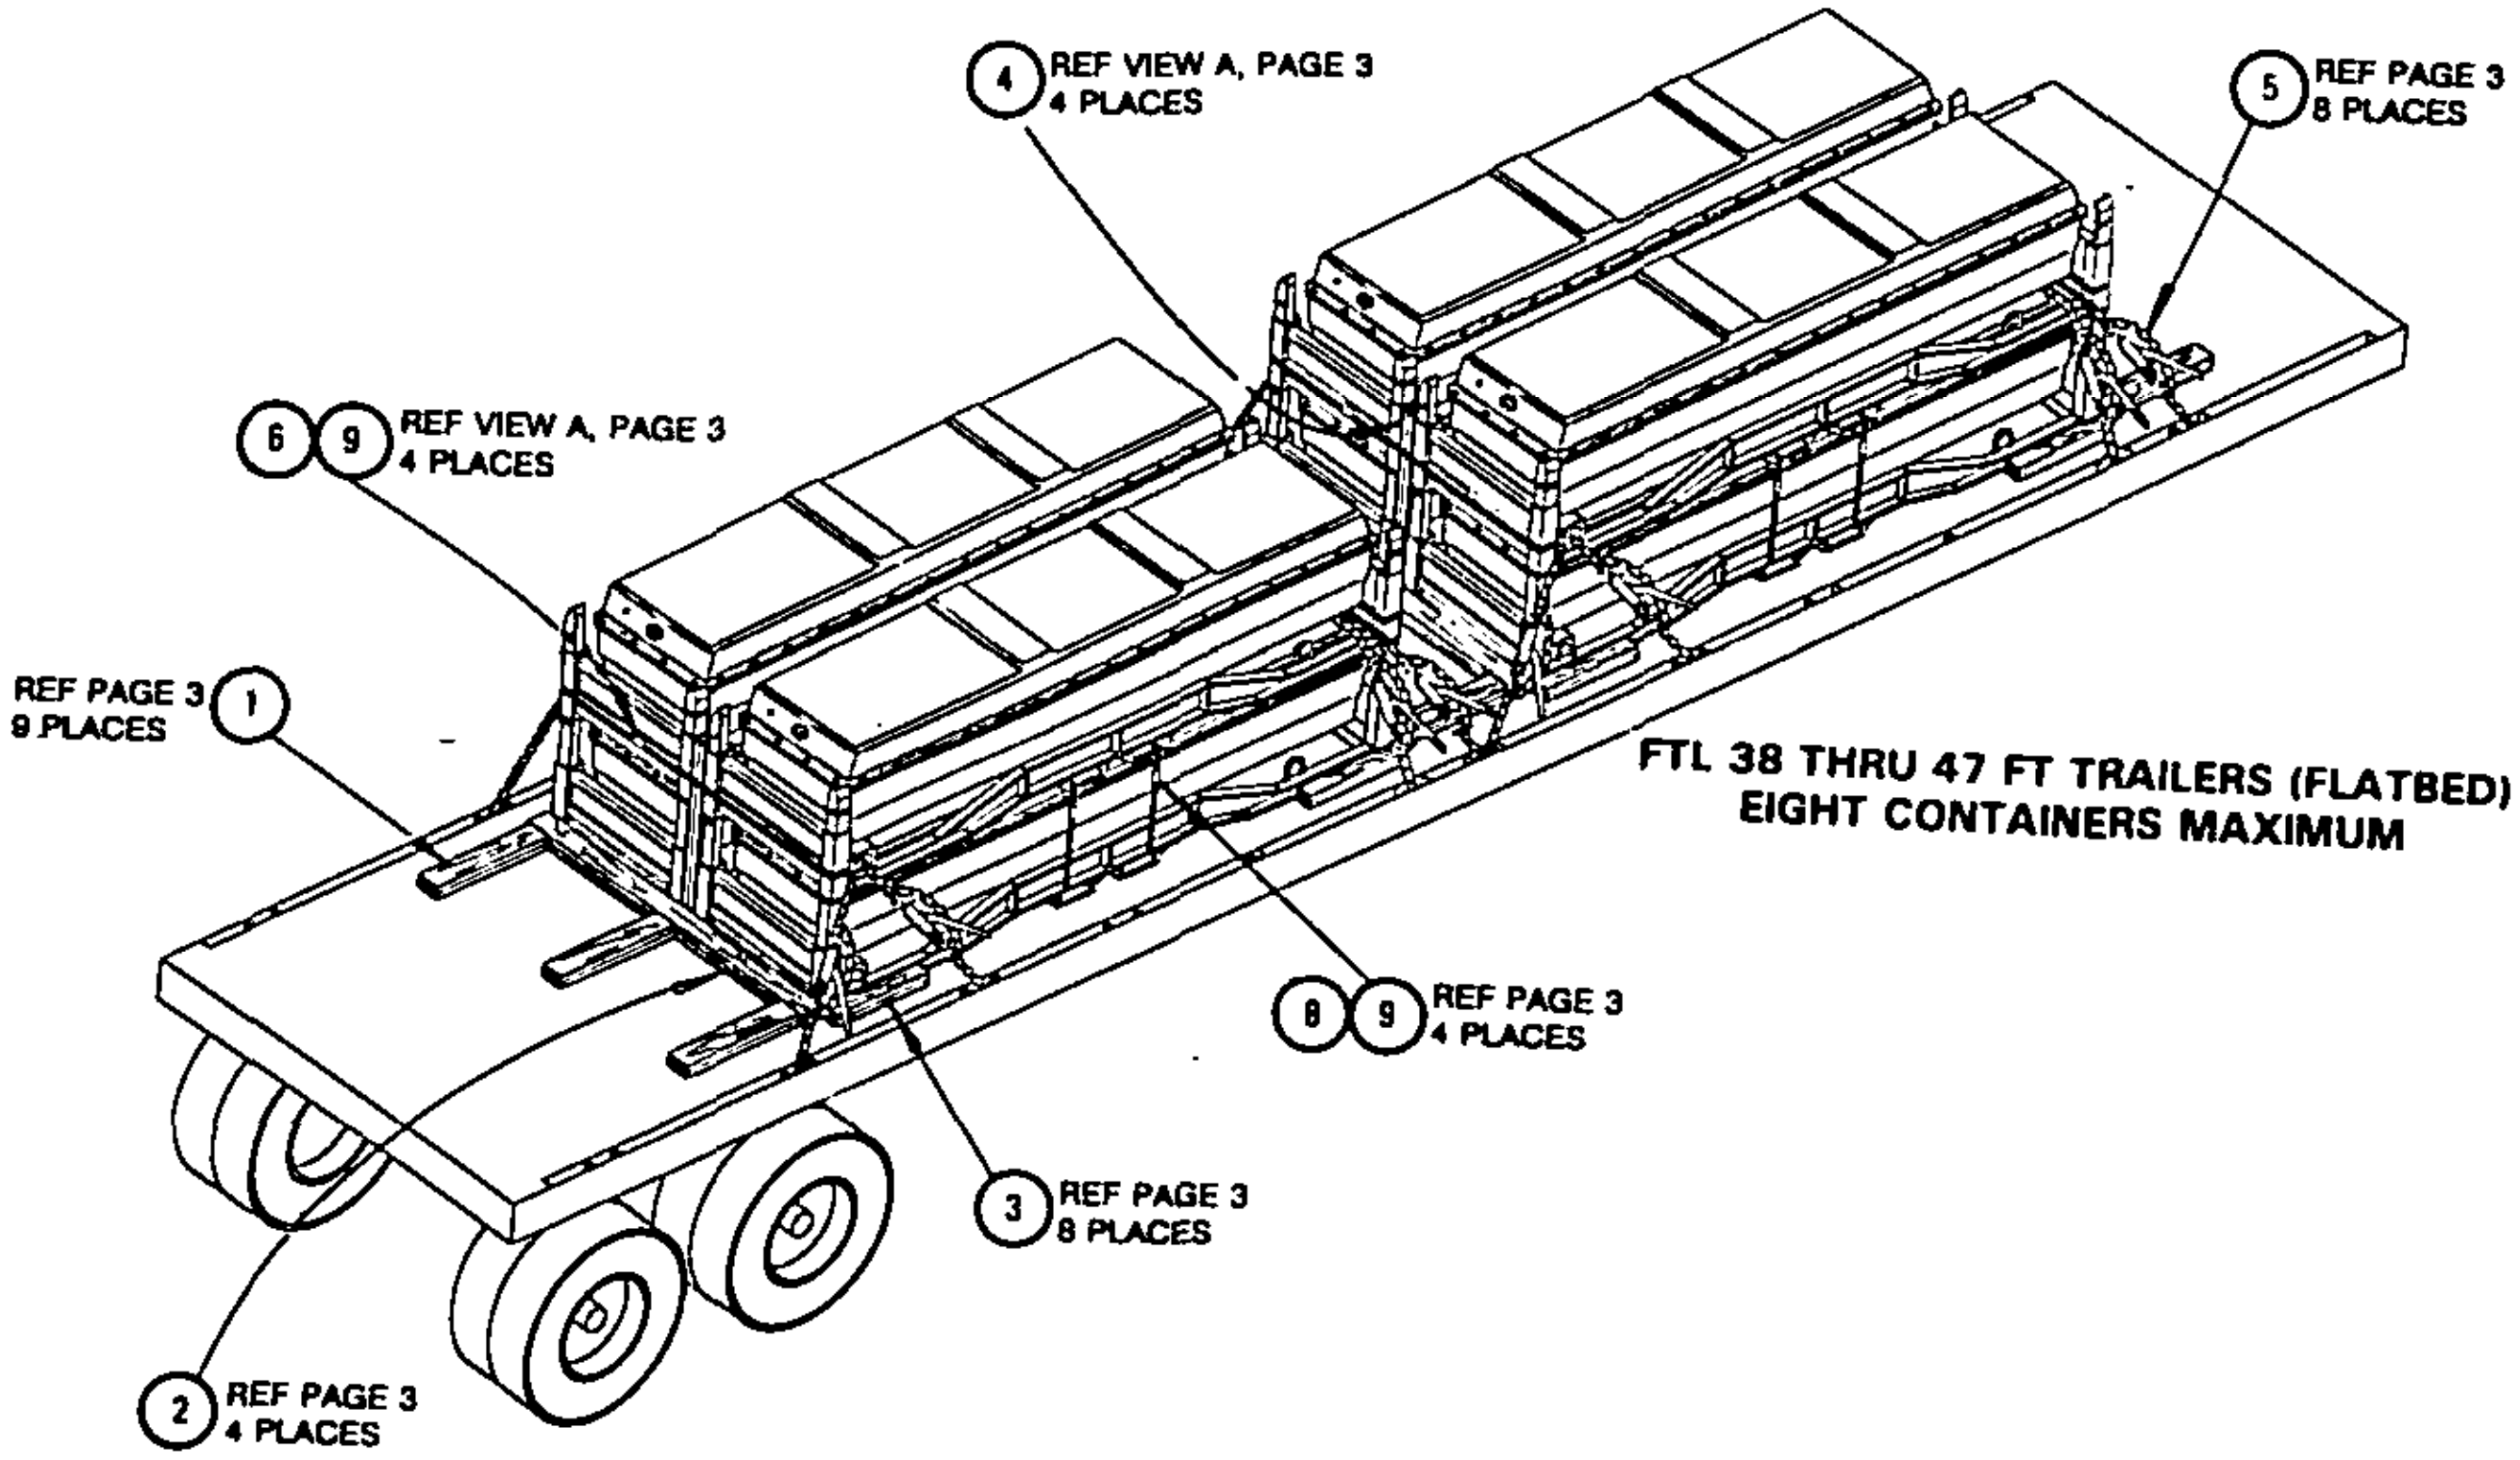

FTL 38 THRU 47 FT TRAILERS (FLATBED)
EIGHT CONTAINERS MAXIMUM

ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
15	SPACER	WOOD	2 X 6 X 8
14	UPPER HORIZONTAL	WOOD	2 X 6 X 69
13	INNER VERTICAL	WOOD	2 X 6 X 33
12	OUTER VERTICAL	WOOD	2 X 6 X 34-1/2
11	BASE HORIZONTAL	WOOD	2 X 6 X 63
10	FLOOR PIECE	WOOD	2 X 6 X 81

LIST OF MATERIALS

LESS THAT FULL LOAD NOTES:

1. LESS THAN FULL LOAD SHIPMENTS MAY BE ARRANGED ON THE TRAILER USING ANY COMBINATION OF THE FOLLOWING ALLOWABLE STACK CONFIGURATIONS (SEE GENERAL TRUCKLOADING DOCUMENT FOR DEFINATION OF THE WORD "STACK").

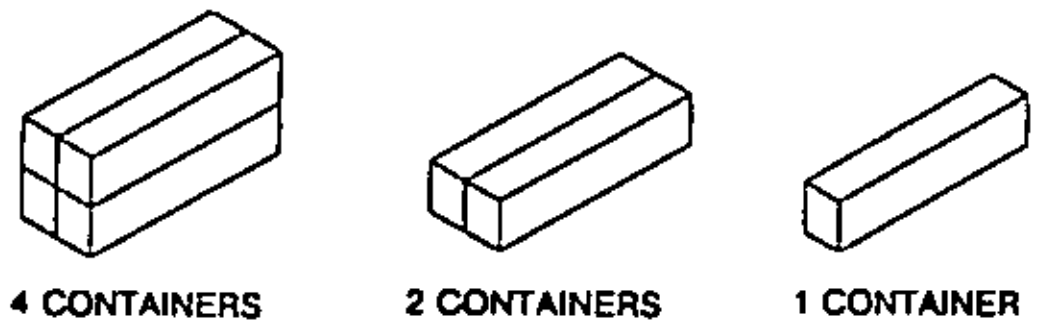

2. THREE CONTAINERS CANNOT BE LOADED IN A SINGLE STACK.
3. A STACK CONSISTING OF TWO CONTAINERS SHALL BE LOADED SIDE BY-SIDE (NOT ONE ON TOP OF THE OTHER).
4. STACKS CONSISTING OF ONE OR TWO CONTAINERS REQUIRE TWO TIEDOWNS (ONE ON EACH END).

FLOOR BLOCKING FOR ONE-WIDE STACK BEHIND TWO-WIDE STACK (LTL)

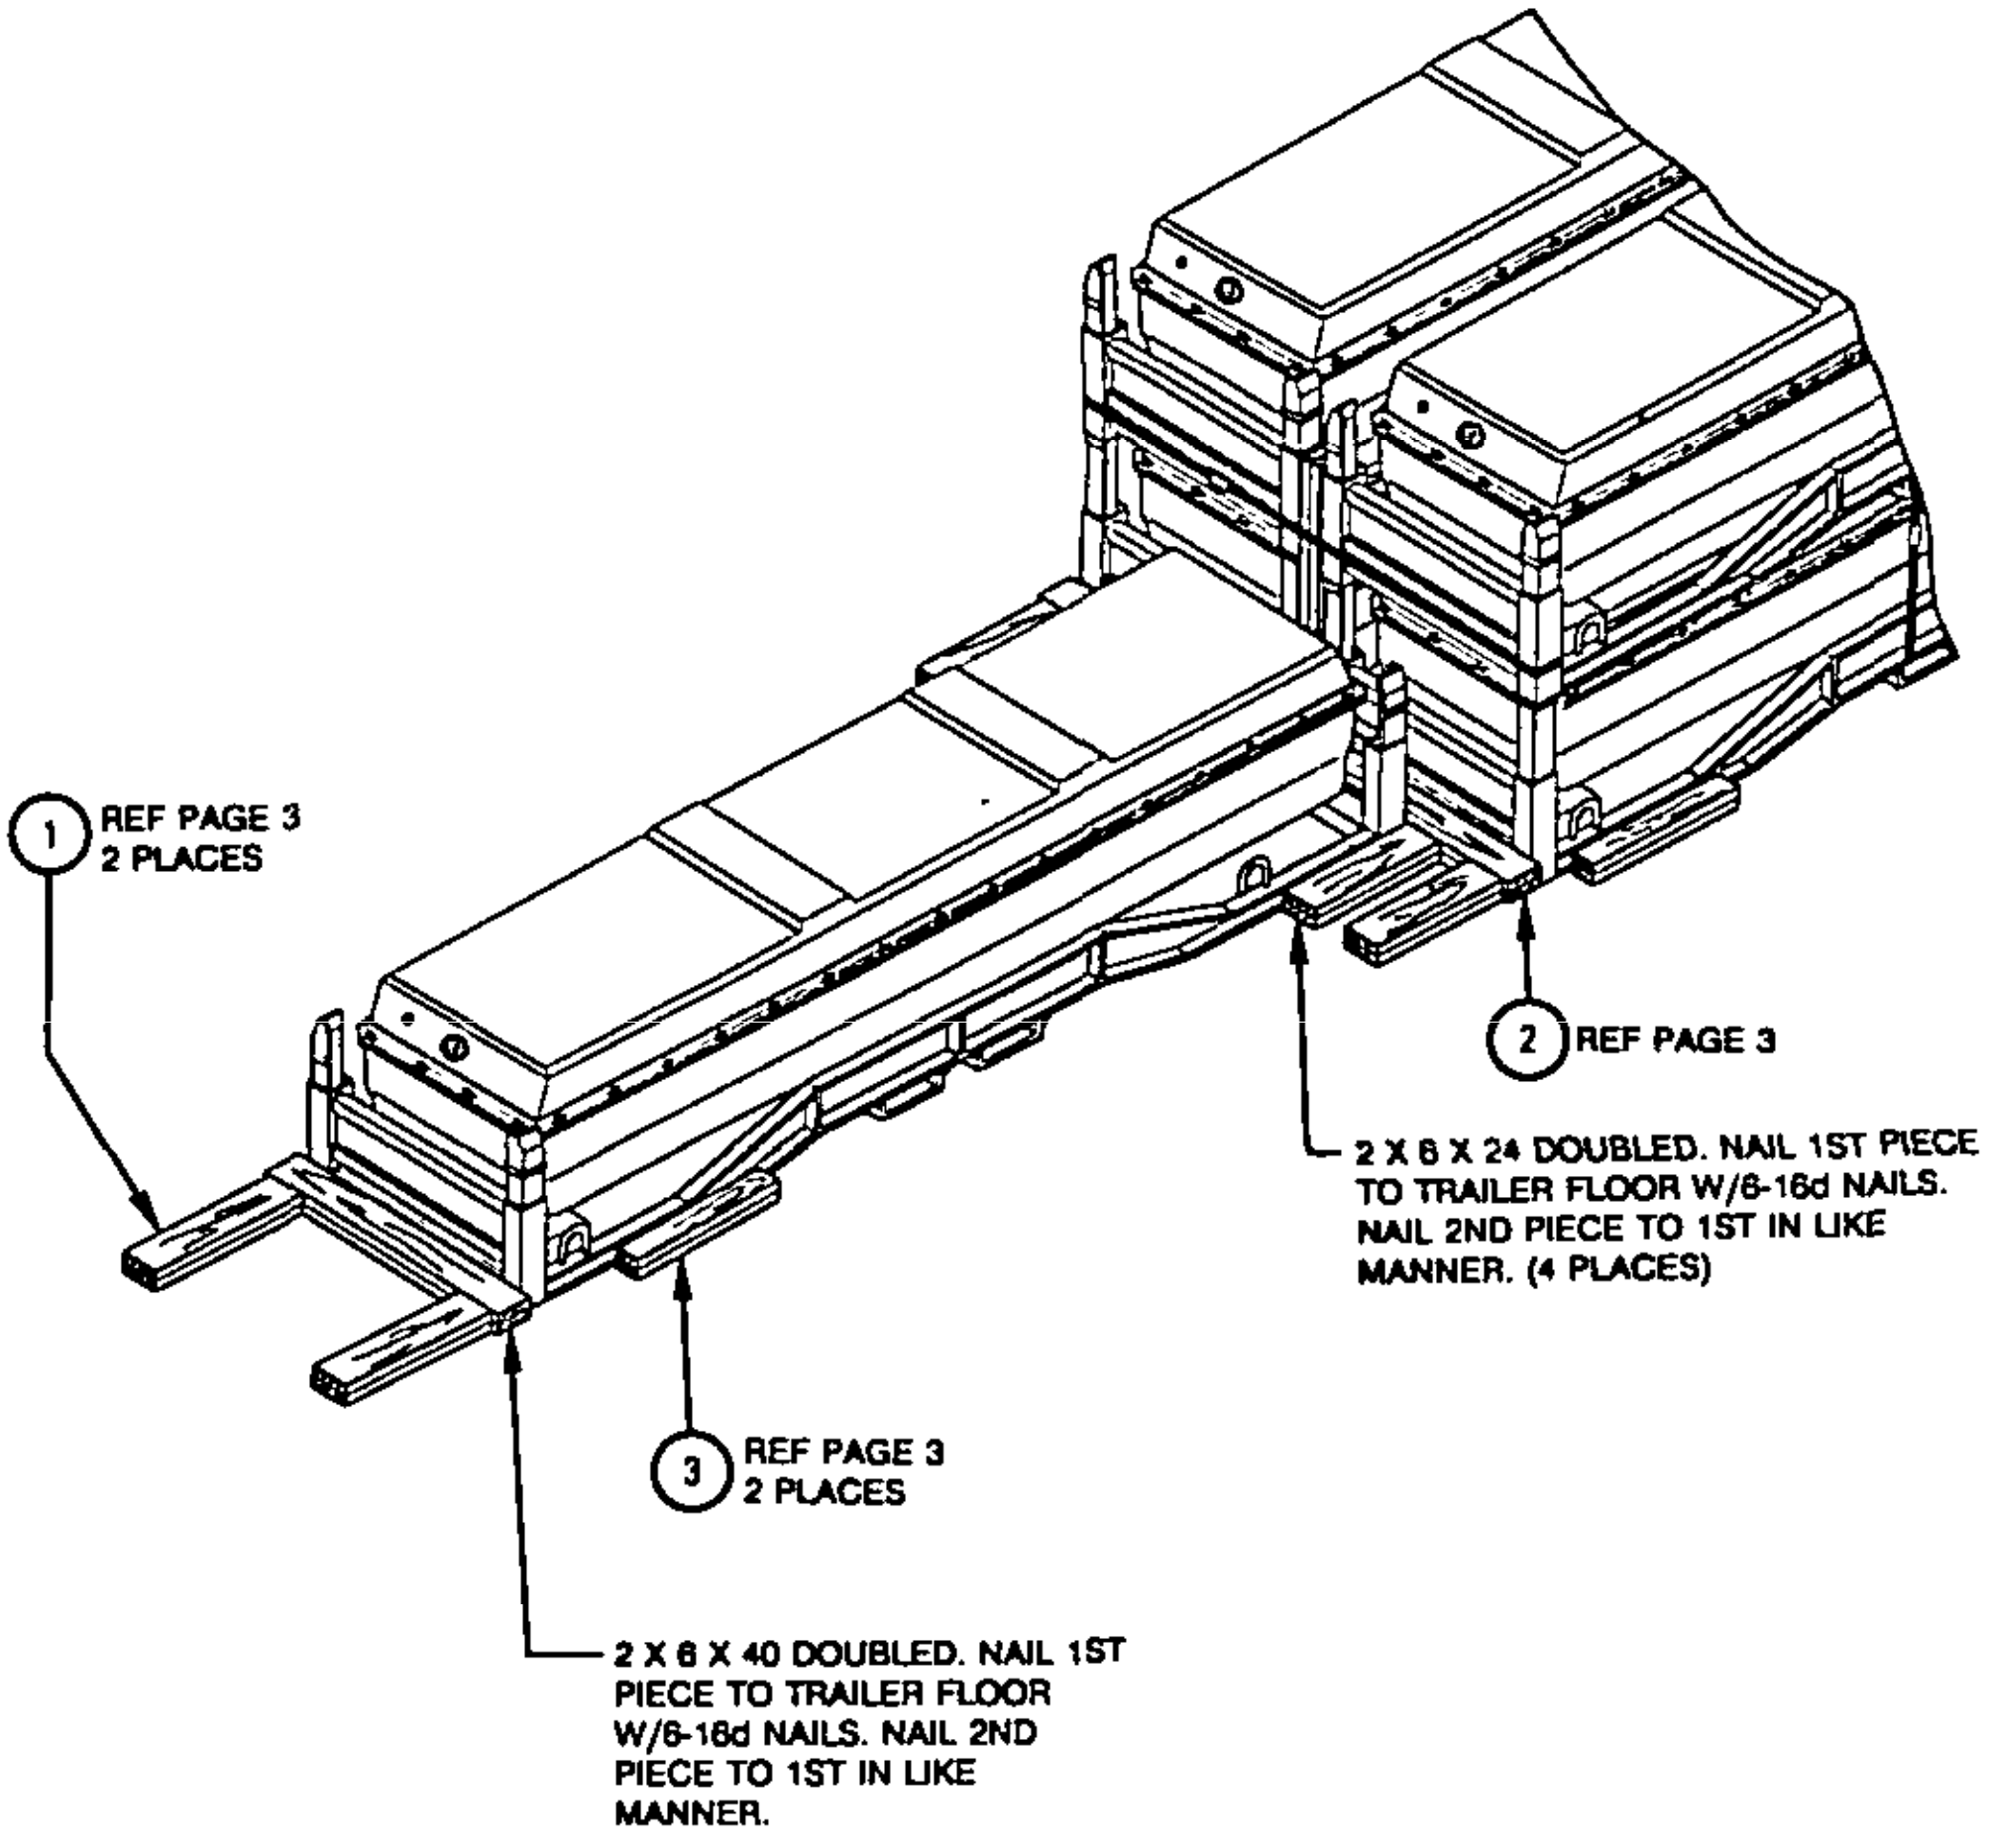
① REF PAGE 3
2 PLACES
② REF PAGE 3
2 X 6 X 24 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER. (4 PLACES)
③ REF PAGE 3
2 PLACES
2 X 6 X 40 DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/6-16d NAILS. NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-0084)